FED. SUP CLASS
6605

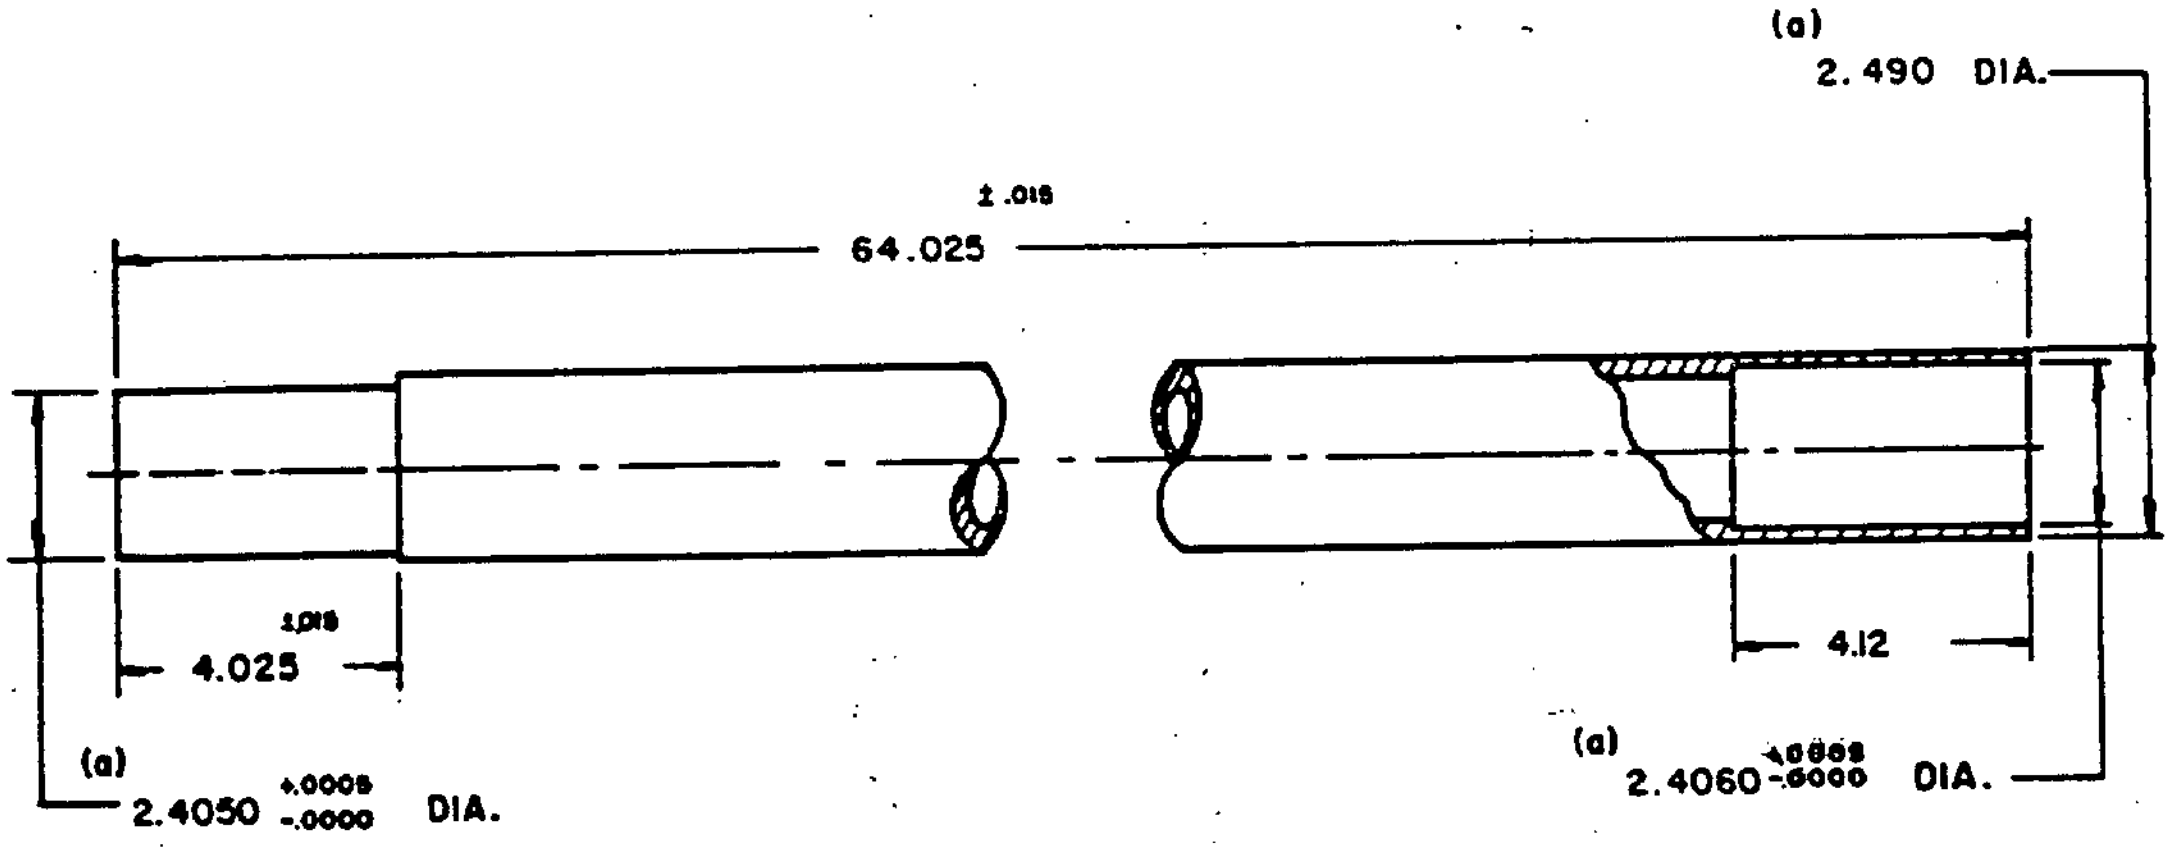

AN PART NO.
(b) AN 5767-1
AN 5767-1A

(a) DIAMETERS SHALL BE CONCENTRIC WITHIN ± .005 MAXIMUM INDICATOR READING.

(b) PART NUMBER AN5767-1 INACTIVE FOR DESIGN AFTER 26 NOV 1951. PART NO. AN5767-1A REPLACES AND IS INTERCHANGEABLE WITH PART NO. AN5767-1.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE MIL-STD-962A APPENDIX

MATERIAL: SEE PROCUREMENT SPECIFICATION.

FINISH: SEE PROCUREMENT SPECIFICATION.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005.

⑥ Cancelled ---- No Superseding Documents.

APPROVED 10 MAY 1948 REVISED ① 26 MAY 49 ② 26 NOV 51 ③ 9 SEP 53 ④ 12 NOV 1976 ⑤ 12 JUNE 87 ⑥ 18 June 1988

USER ACTIVITIES:

REVIEWER ACTIVITIES:

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AMSC N/A

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P. A. 71
Other Cust
AF -99
NAVY-AS

INTERNATIONAL INTEREST

TITLE
TUBE - EXTENSION GYRO STABILIZED DRIFT METER

AN 5767

SHEET 1 OF 3

PROCUREMENT SPECIFICATION
MIL-T-7771

SUPERSEDES:

6605-0385

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

		DATE
DRAWN BY		11-23-86
TYPED BY		
CHECKED BY	Harvey	11/26/86

NOTES TO PRINTER REDUCE BORDER TO 6 - 27/32 X 9 - 3/4 PRINT LEFT BORDER LINE ONE INCH FROM LEFT EDGE OF 8 X 10 - 1/2 SHEET PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8 X 10 - 1/2 SHEET SIGNATURE FORM NOT TO [illegible]

FED. SUP CLASS
6605

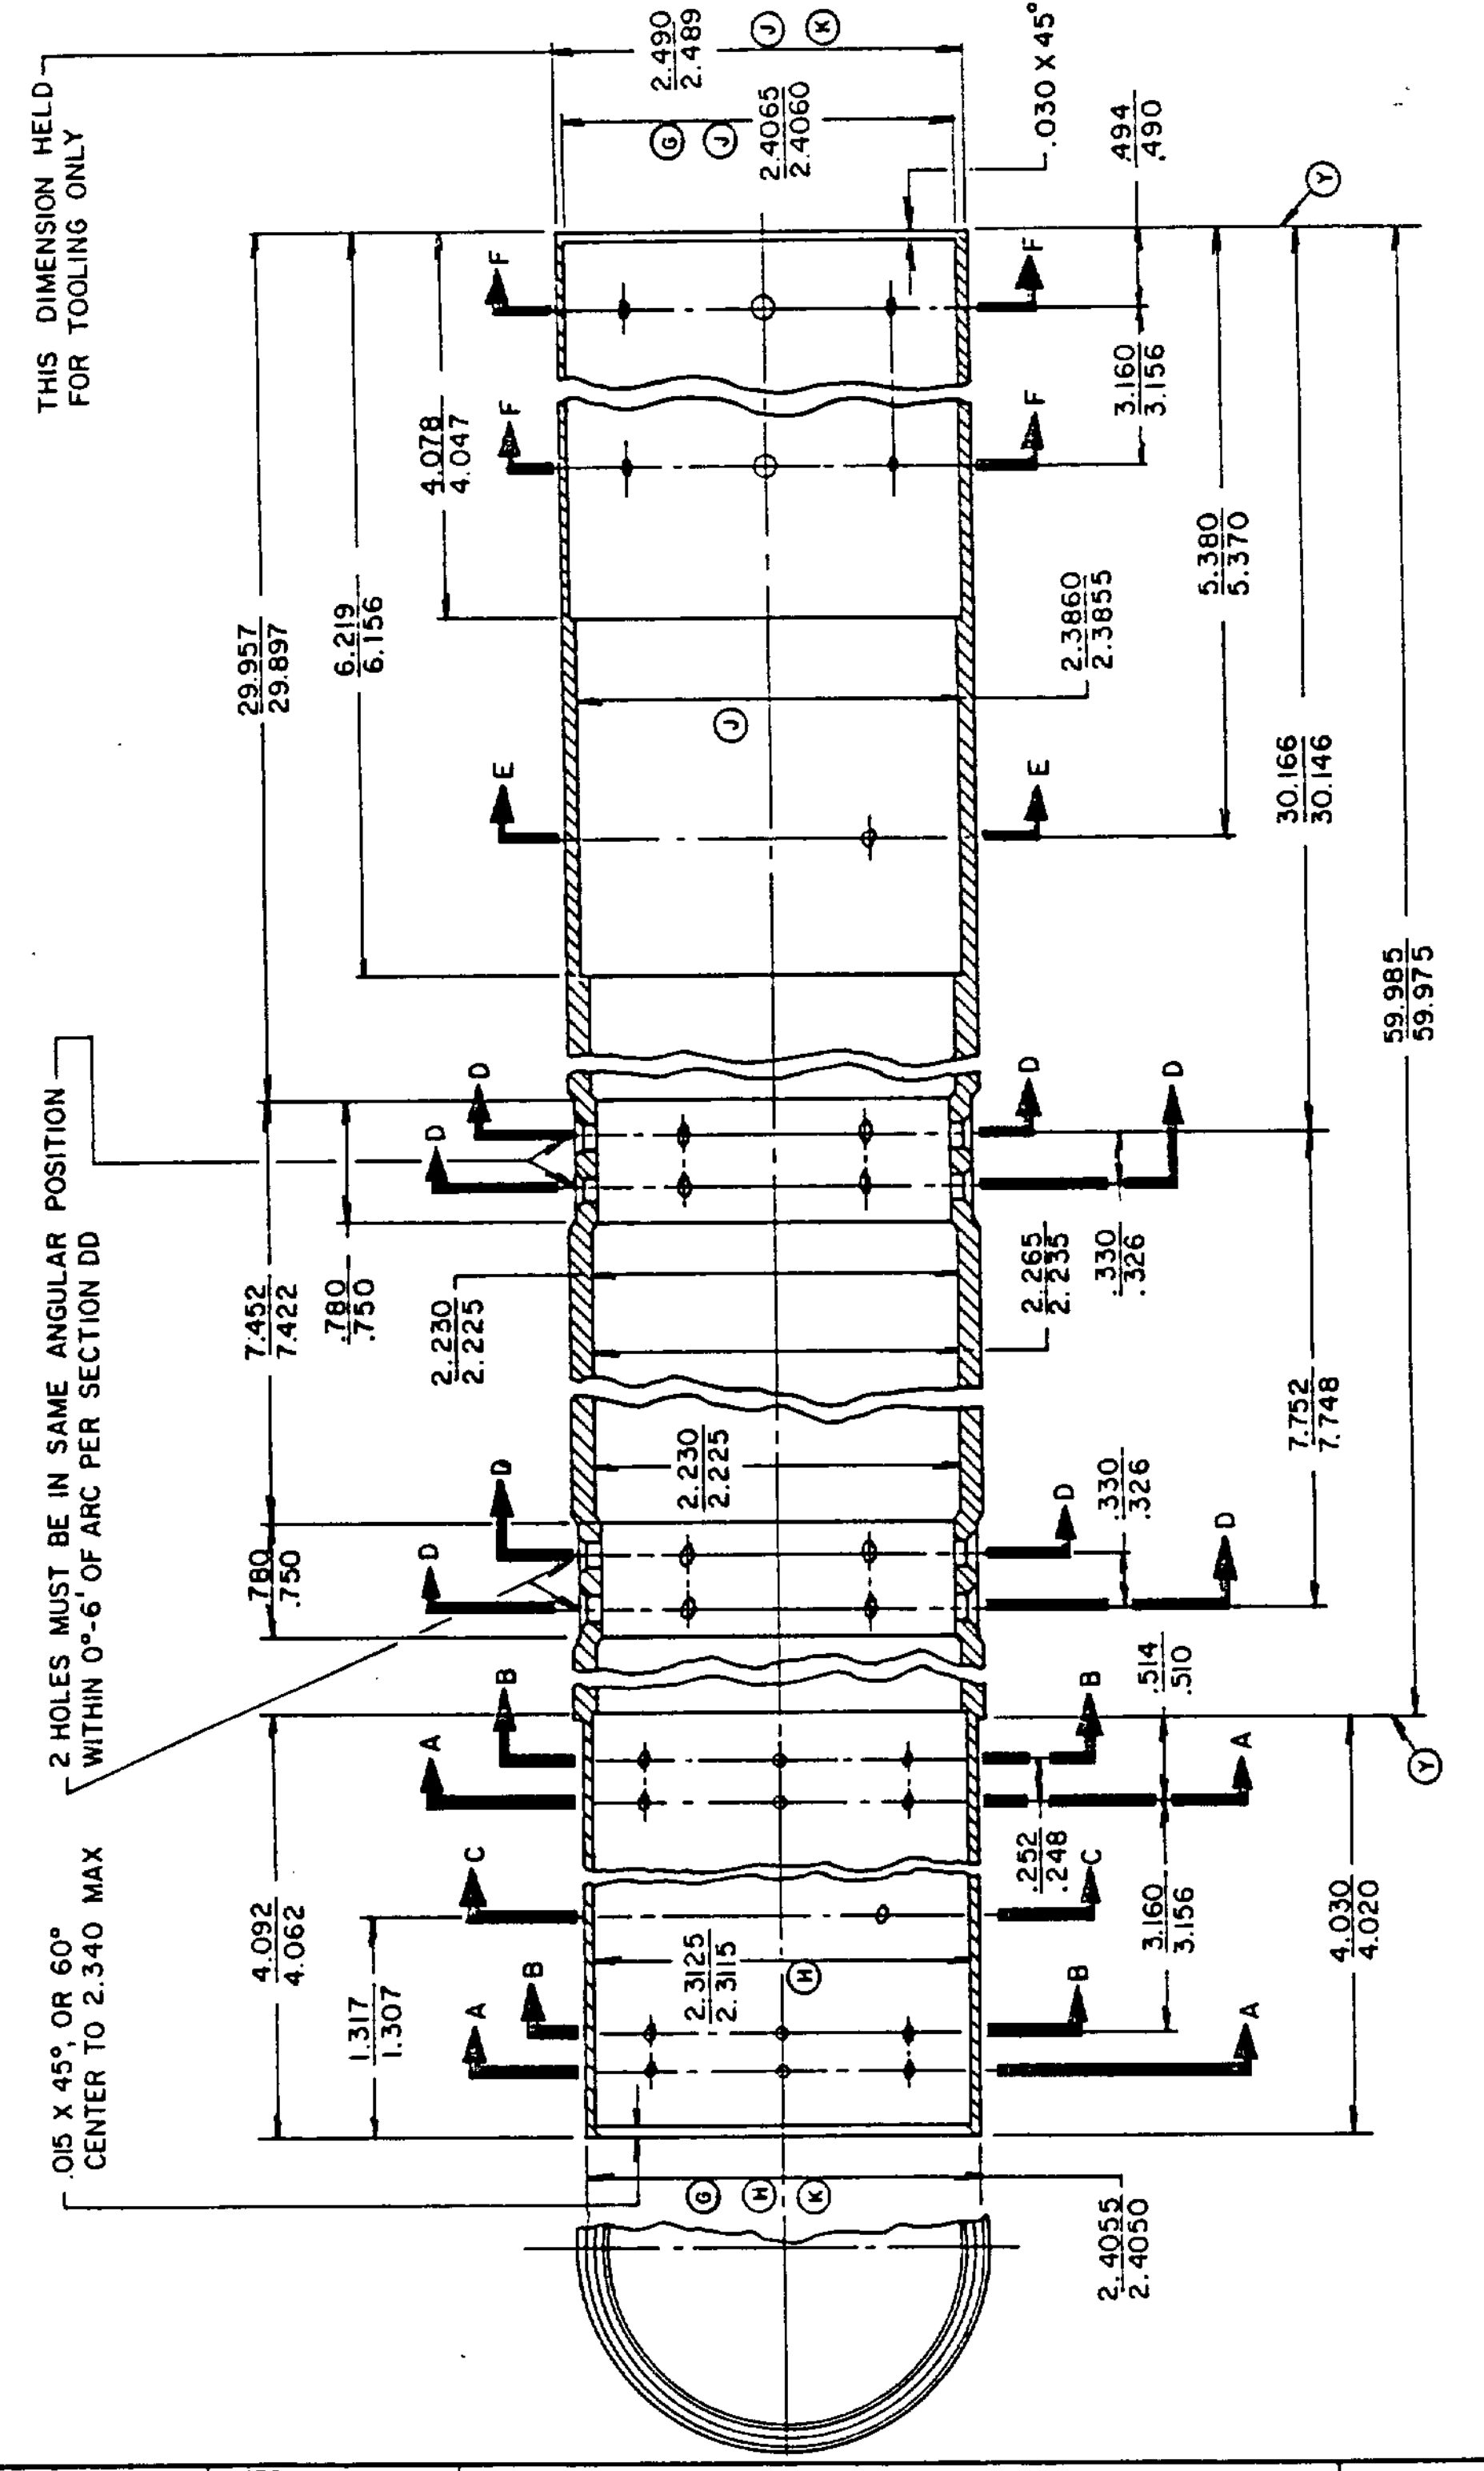

AN PART NO.
AN 5767-2

PART NUMBER AN5767-2 TO BE USED WITH MS 28012 DRIFT METER.

APPROVED 9 SEP 53 REVISED ⑥ FOR CHANGES SEE SHT 1

DISTRIBUTION STATEMENT A:- APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

USER ACTIVITIES:

REVIEWER ACTIVITIES:

AMSC N/A
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P. A. USAF -71
Other Cust
AIR FORCE-99
NAVY -AS

INTERNATIONAL INTEREST

TITLE
TUBE - EXTENSION, GYRO
STABILIZED DRIFT METER

AN 5767

PROCUREMENT SPECIFICATION MIL-T-7771

SUPERSEDES:

SHEET 2 OF 3

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

6605-0385

DATE

DRAWN BY

TYPED BY

CHECKED BY 12/3/56

NOTES TO PRINTER: REDUCE BORDER TO 6 - 27/32 X 9 - 3/4 PRINT LEFT BORDER LINE ONE INCH FROM LEFT EDGE OF 8 X 10 - 1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8 X 10 - 1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8 X 10 - 1/2 SHEET.

FED. SUP CLASS
6605

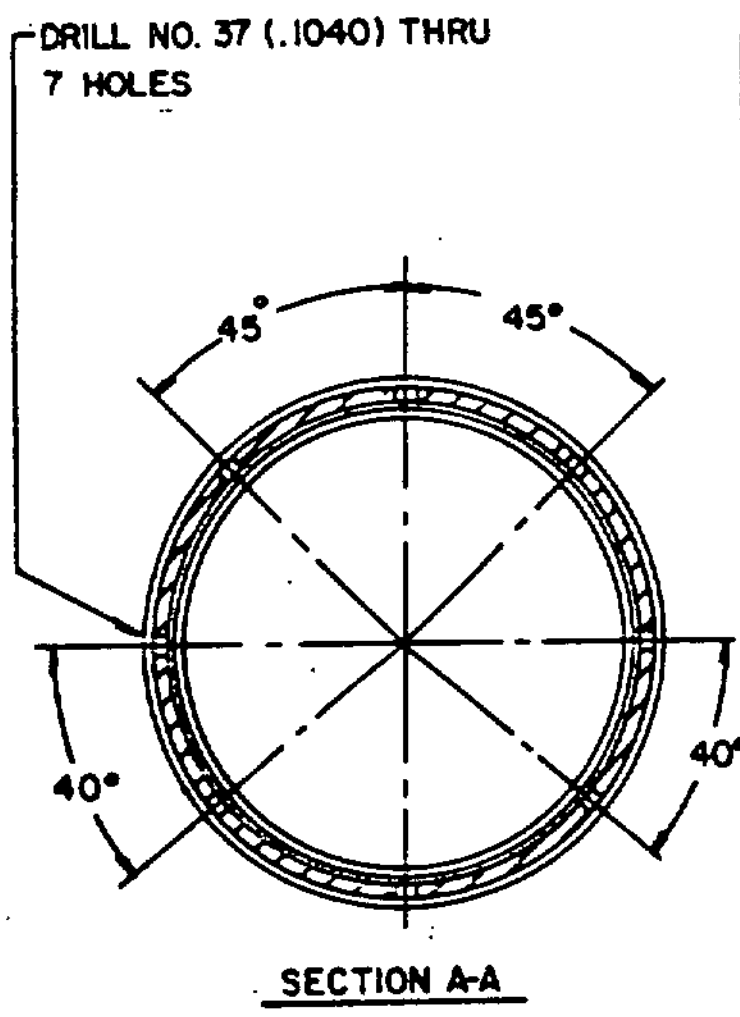

SECTION A-A

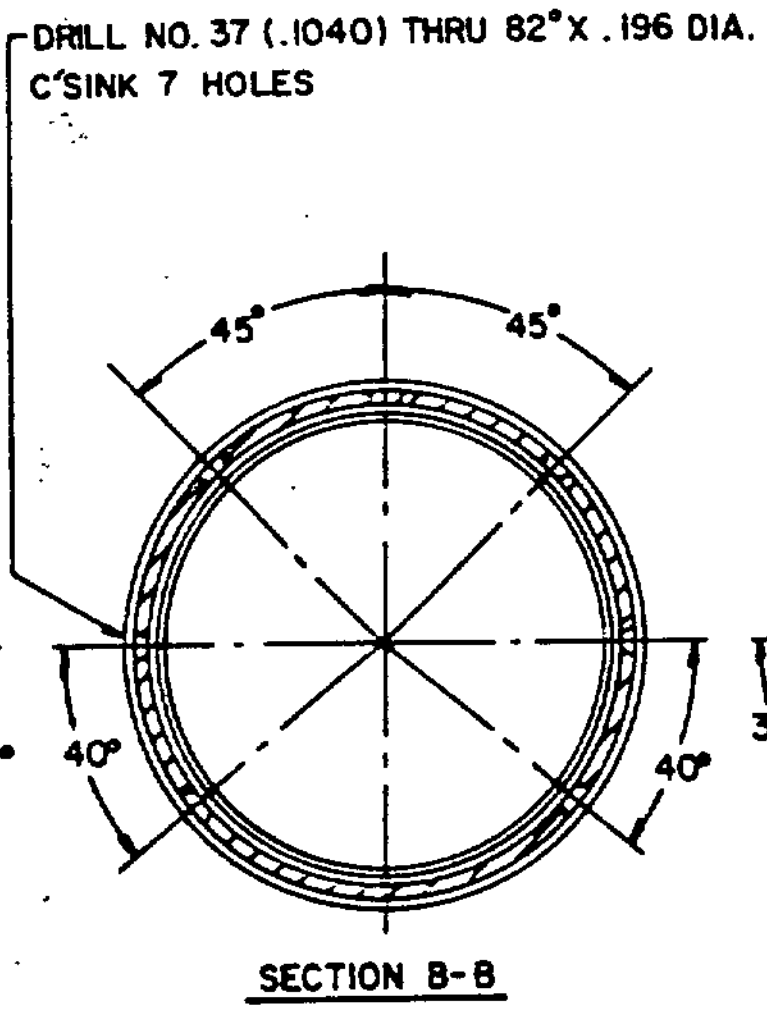

SECTION B-B

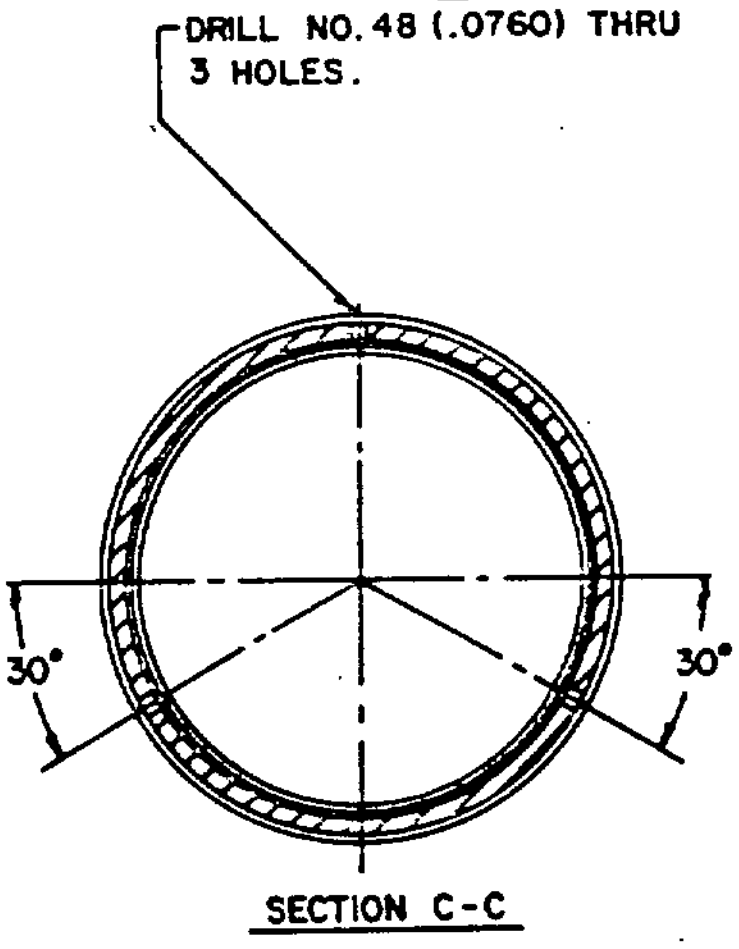

SECTION C-C

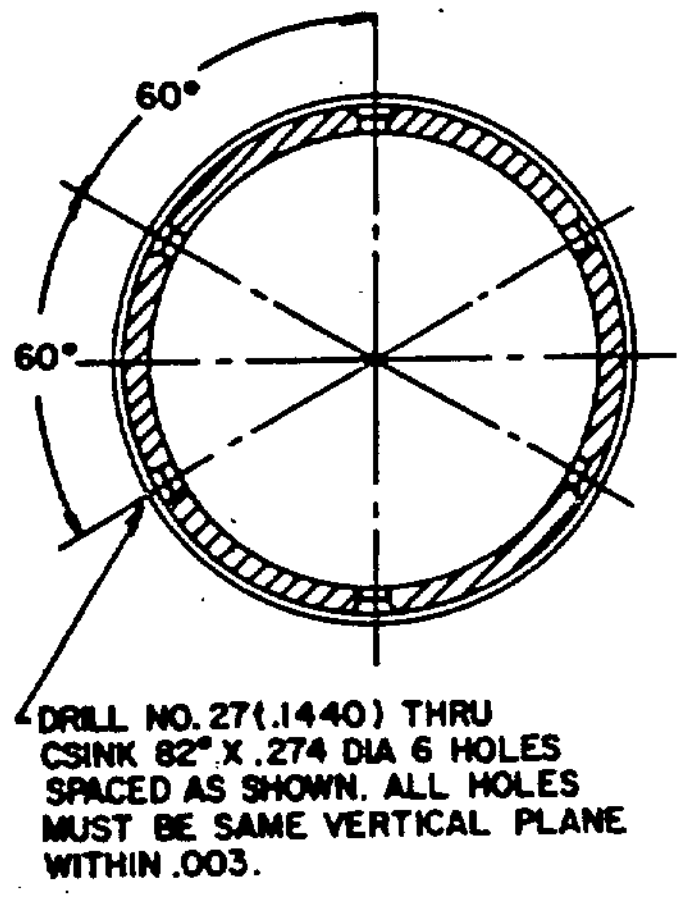
60°
60°
DRILL NO. 27 (.1440) THRU
CSINK 82° X .274 DIA 6 HOLES
SPACED AS SHOWN. ALL HOLES
MUST BE SAME VERTICAL PLANE
WITHIN .003.

SECTION D-D

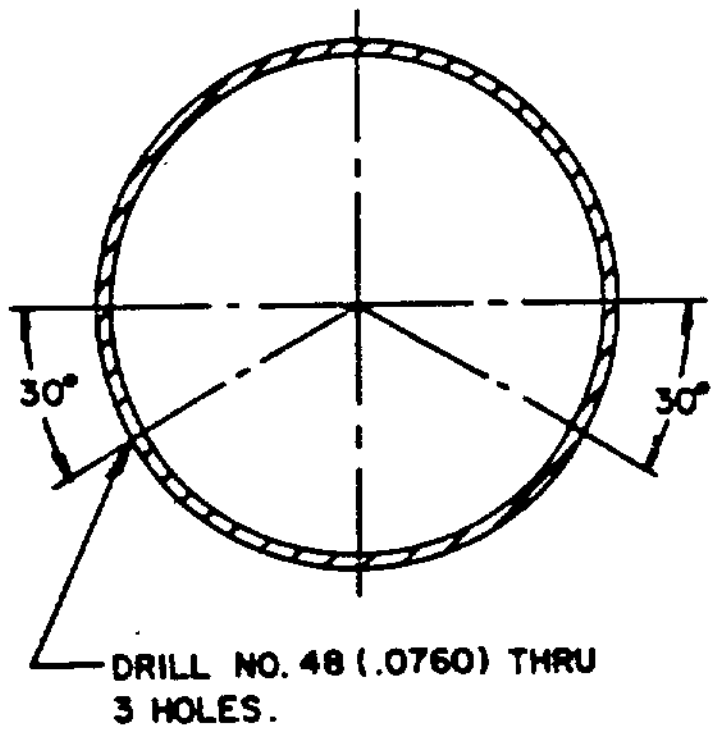

SECTION E-E

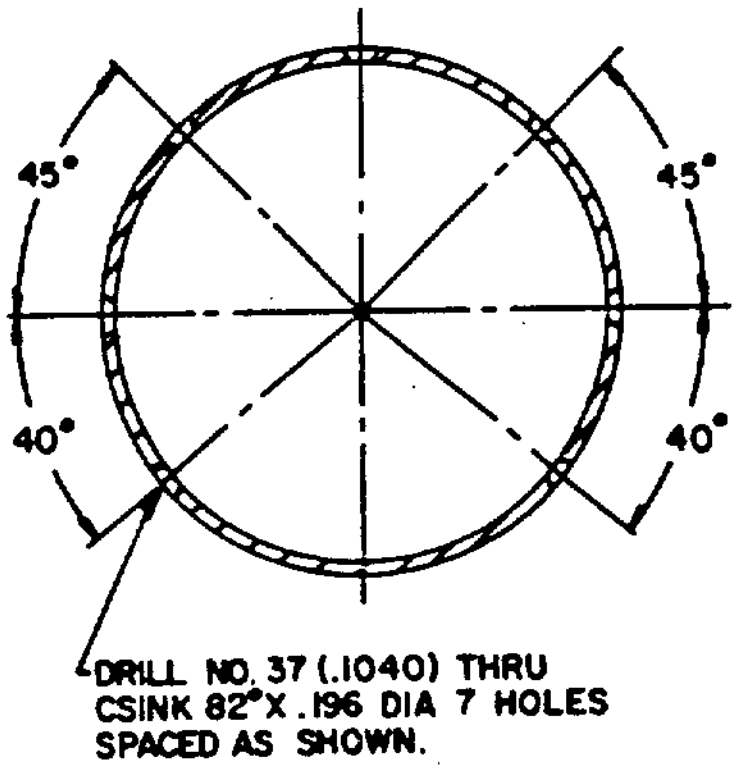

SECTION F-F

CYLINDRICAL SURFACES OF DIAMETERS MARKED Ⓖ MUST BE PARALLEL TO EACH .003 PER INCH WHEN MEASURED LENGTH OF EACH SURFACE.

DIAMETERS MARKED Ⓗ MUST BE CONCENTRIC WITH .004 FULL INDICATOR READING.

DIAMETERS MARKED Ⓙ MUST BE CONCENTRIC WITH .004 FULL INDICATOR READING.

ADJACENT PORTIONS OF DIAMETERS MARKED Ⓚ MUST BE CONCENTRIC WITHIN .004 FULL INDICATOR READING.

SURFACES MARKED Ⓨ MUST BE SQUARE TO ADJACENT DIAMETERS MARKED Ⓖ WITHIN .002 FULL INDICATOR READING.

FINISH: INSIDE SURFACES NOT MACHINED MUST BE NONREFLECTING.
SAND BLAST OUTSIDE.
BLACK ALUMILITE PS2C.

APPROVED 9 SEP 53 REVISED ⑥ FOR CHANGES SEE SHT 1

F. A. USAF-71 Other Cust AIR FORCE-99 NAVY -AS	INTERNATIONAL INTEREST	TITLE TUBE-EXTENSION, GYRO STABILIZED DRIFT METER	AN 5767 SHEET 3 OF 3
PROCUREMENT SPECIFICATION MIL-T-7771	SUPERSEDES:		

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

6605-0385

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

USER ACTIVITIES:

REVIEWER ACTIVITIES:

AMSC N/A
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

		DATE
DRAWN BY		1-5-87
TYPED BY		
CHECKED BY	Harvey Smith	1-5-87

NOTES TO PRINTER REDUCE BORDER TO 6 - 27/32 X 9 - 3/4 PRINT LEFT BORDER LINE ONE INCH FROM LEFT EDGE OF 8 X 10 - 1/2 SHEET PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8 X 10 - 1/2 SHEET SIGNATURE FORM NOT TO BE INCLUDED ON 8 X 10 - 1/2 SHEET