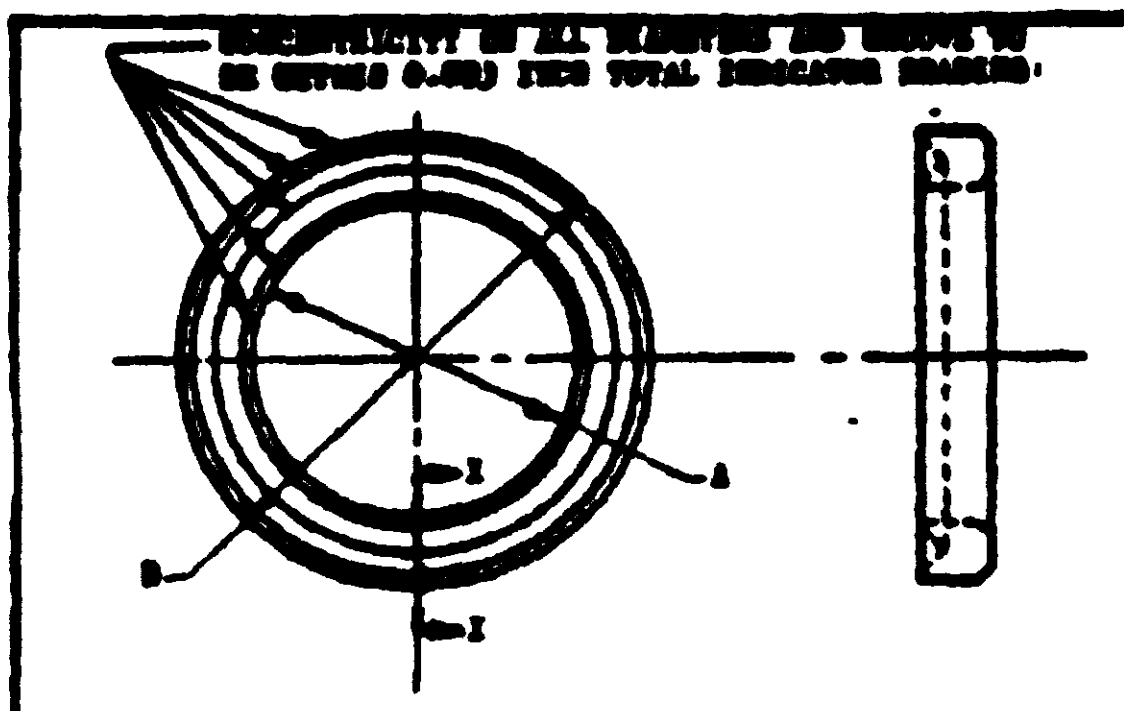
ECCENTRICITY OF ALL DIAMETERS AND GROOVE TO BE WITHIN 0.003 INCH TOTAL INDICATOR READING.
A
B
I
I

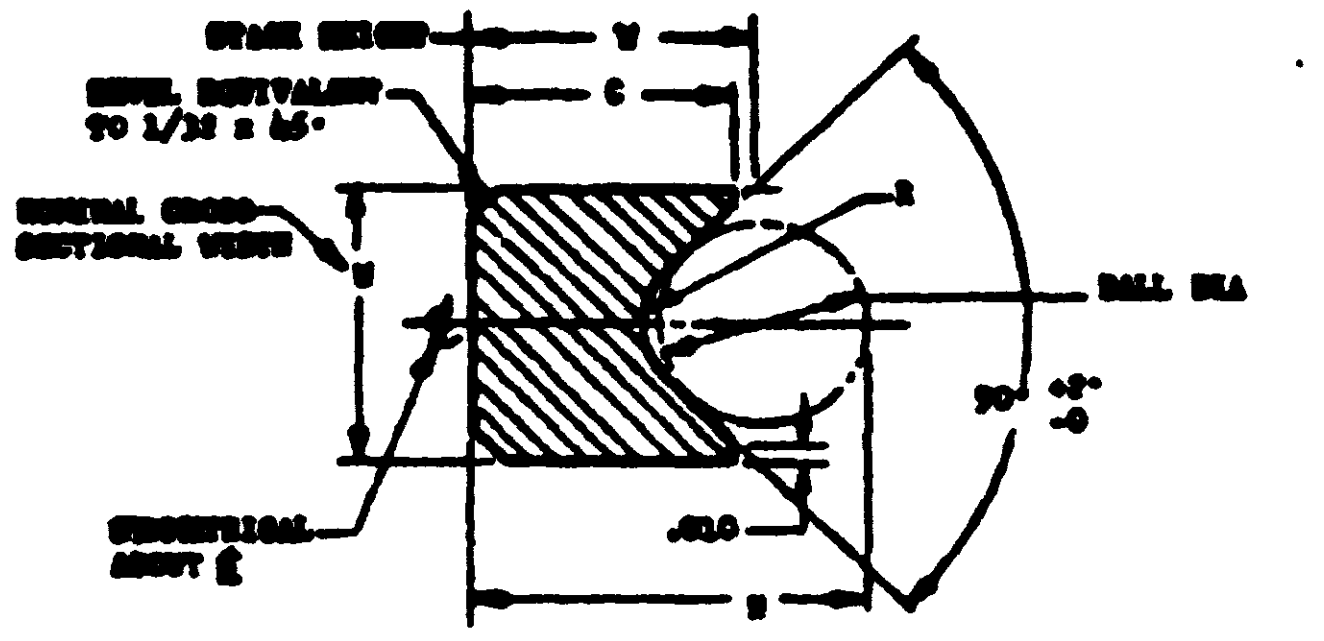

ENLARGED VIEW OF SECTION I-I

DASH NO.	NOMINAL			A +.002 -.000	B +.000 -.002	C REF	BALL DIA	R ±.005	Y +0 -1/64
	V	ID	OD						
1	3/16	1/8	1/2	.127	.498	.177	.1562	.282	1/16
2	3/16	3/16	9/16	.190	.560	.177	.1562	.282	1/16
3	3/16	1/4	5/8	.252	.623	.177	.1562	.282	1/16
4	3/16	5/16	11/16	.315	.685	.177	.1562	.282	1/16
5	3/16	3/8	3/4	.377	.748	.177	.1562	.282	1/16
6	3/16	7/16	13/16	.440	.810	.177	.1562	.282	1/16
7	3/16	1/2	7/8	.502	.873	.177	.1562	.282	1/16
8	1/4	1/4	3/4	.252	.748	.240	.1875	.351	1/16
9	1/4	5/16	13/16	.315	.810	.240	.1875	.351	1/16
10	1/4	3/8	7/8	.377	.873	.240	.1875	.351	1/16
11	1/4	7/16	15/16	.440	.935	.240	.1875	.351	1/16
12	1/4	1/2	1	.502	.998	.240	.1875	.351	1/16
13	1/4	9/16	1- 1/16	.565	1.060	.240	.1875	.351	1/16
14	1/4	5/8	1- 1/8	.627	1.123	.240	.1875	.351	1/16
15	1/4	11/16	1- 3/16	.690	1.185	.240	.1875	.351	1/16
16	1/4	3/4	1- 1/4	.752	1.248	.240	.1875	.351	1/16
17	1/4	13/16	1- 5/16	.815	1.310	.240	.1875	.351	1/16
18	1/4	7/8	1- 3/8	.877	1.373	.240	.1875	.351	1/16
19	1/4	15/16	1- 7/16	.940	1.435	.240	.1875	.351	1/16
20	1/4	1	1- 1/2	1.002	1.498	.240	.1875	.351	1/16
21	1/4	1-1/16	1- 9/16	1.065	1.560	.240	.1875	.351	1/16
22	1/4	1-1/8	1- 5/8	1.127	1.623	.240	.1875	.351	1/16
23	1/4	1-3/16	1-11/16	1.190	1.685	.240	.1875	.351	1/16
24	1/4	1-1/4	1- 3/4	1.252	1.748	.240	.1875	.351	1/16
25	5/16	1- 1/4	1- 7/8	1.252	1.873	.302	.2500	.458	7/64
26	5/16	1- 3/8	2	1.377	1.998	.302	.2500	.458	7/64
27	5/16	1- 1/2	2- 1/8	1.502	2.123	.302	.2500	.458	7/64
28	5/16	1- 5/8	2- 1/4	1.627	2.248	.302	.2500	.458	7/64
29	5/16	1- 3/4	2- 3/8	1.752	2.373	.302	.2500	.458	7/64
30	5/16	1- 7/8	2- 1/2	1.877	2.498	.302	.2500	.458	7/64
			(a)	+.004 -.000	+.000 -.004				
31	5/16	2	2- 5/8	2.002	2.623	.302	.2500	.458	7/64
32	5/16	2- 1/8	2- 3/4	2.127	2.748	.302	.2500	.458	7/64
33	5/16	2- 1/4	2- 7/8	2.252	2.873	.302	.2500	.458	7/64
34	5/16	2- 3/8	3	2.377	2.998	.302	.2500	.458	7/64
35	5/16	2- 1/2	3- 1/8	2.502	3.123	.302	.2500	.458	7/64
36	3/8	2- 1/2	3- 1/4	2.502	3.248	.365	.3125	.565	1/8
37	3/8	2- 5/8	3- 3/8	2.628	3.372	.365	.3125	.565	1/8
38	3/8	2- 3/4	3- 1/2	2.753	3.497	.365	.3125	.565	1/8
39	3/8	2- 7/8	3- 5/8	2.878	3.622	.365	.3125	.565	1/8
40	3/8	3	3- 3/4	3.003	3.747	.365	.3125	.565	1/8

DASH NO.	NOMINAL			A +.004 -.000	B +.000 -.004	C REF	BALL DIA	R ±.005	Y +0 -1/64
	V	ID	OD						
41	3/8	3-1/8	3-7/8	3.128	3.872	.365	.3125	.565	1/8
42	3/8	3-1/4	4	3.253	3.997	.365	.3125	.565	1/8
43	3/8	3-3/8	4-1/8	3.378	4.122	.365	.3125	.565	1/8
44	3/8	3-1/2	4-1/4	3.503	4.247	.365	.3125	.565	1/8
45	3/8	3-5/8	4-3/8	3.628	4.372	.365	.3125	.565	1/8
46	3/8	3-3/4	4-1/2	3.753	4.497	.365	.3125	.565	1/8
47	3/8	3-7/8	4-5/8	3.878	4.622	.365	.3125	.565	1/8
48	7/16	3-7/8	4-3/4	3.878	4.747	.427	.3750	.671	5/32
49	7/16	4	4-7/8	4.003	4.872	.427	.3750	.671	5/32
50	7/16	4-1/4	5-1/8	4.253	5.122	.427	.3750	.671	5/32
51	7/16	4-1/2	5-3/8	4.503	5.372	.427	.3750	.671	5/32
52	7/16	4-3/4	5-5/8	4.753	5.622	.427	.3750	.671	5/32
53	7/16	5	5-7/8	5.003	5.872	.427	.3750	.671	5/32
54	7/16	5-1/4	6-1/8	5.253	6.122	.427	.3750	.671	5/32
55	7/16	5-1/2	6-3/8	5.503	6.372	.427	.3750	.671	5/32
56	1/2	5-1/2	6-1/2	5.503	6.497	.490	.4375	.778	5/32
57	1/2	5-3/4	6-3/4	5.753	6.747	.490	.4375	.778	5/32
58	1/2	6	7	6.003	6.997	.490	.4375	.778	5/32
59	1/2	6-1/4	7-1/4	6.253	7.247	.490	.4375	.778	5/32
60	1/2	6-1/2	7-1/2	6.503	7.497	.490	.4375	.778	5/32
61	1/2	6-3/4	7-3/4	6.753	7.747	.490	.4375	.778	5/32
62	1/2	7	8	7.003	7.997	.490	.4375	.778	5/32
63	1/2	7-1/4	8-1/4	7.253	8.247	.490	.4375	.778	5/32
64	1/2	7-1/2	8-1/2	7.503	8.497	.490	.4375	.778	5/32
65	1/2	7-3/4	8-3/4	7.753	8.747	.490	.4375	.778	5/32
66	1/2	8	9	8.003	8.997	.490	.4375	.778	5/32
67	1/2	8-1/2	9-1/2	8.503	9.497	.490	.4375	.778	5/32
68	1/2	9	10	9.003	9.997	.490	.4375	.778	5/32
69	1/2	9-1/2	10-1/2	9.503	10.497	.490	.4375	.778	5/32
70	1/2	10	11	10.003	10.997	.490	.4375	.778	5/32
71	1/2	10-1/2	11-1/2	10.503	11.497	.490	.4375	.778	5/32
72	1/2	11	12	11.003	11.997	.490	.4375	.778	5/32
73	1/2	11-1/2	12-1/2	11.503	12.497	.490	.4375	.778	5/32
74	1/2	12	13	12.003	12.997	.490	.4375	.778	5/32
75	1/2	12-1/2	13-1/2	12.503	13.497	.490	.4375	.778	5/32
76	1/2	13	14	13.003	13.997	.490	.4375	.778	5/32
77	1/2	13-1/2	14-1/2	13.503	14.497	.490	.4375	.778	5/32
78	1/2	14	15	14.003	14.997	.490	.4375	.778	5/32
79	1/2	14-1/2	15-1/2	14.503	15.497	.490	.4375	.778	5/32
80	1/2	15	16	15.003	15.997	.490	.4375	.778	5/32

(a) TOLERANCES FOR DIMENSIONS A AND B SIZES -31 TO -40 INCLUSIVE.

⑤ MATERIAL: BEARING BRONZE WITH MINIMUM 60,000 LB PER SQ INCH TENSILE STRENGTH OR
ALUMINUM ALLOY, SPECIFICATION QQ-A-225/8 T-6
ALUMINUM ALLOY, SPECIFICATION QQ-A-250/4 T-4
ALUMINUM ALLOY, TUBING, SPECIFICATION WW-T-700/6 T-6

⑤ FINISH: ALL SURFACES TO BE EQUAL TO SMOOTH MACHINED FINISH. AL ALLOY - ANODIZE, SPEC MIL-A-8625

EXAMPLE OF PART NO.: AN6228-7 = FEMALE ADAPTER RING, 1/2 NOMINAL ID, 7/8 NOMINAL OD.

BREAK ALL SHARP EDGES .005 RADIUS.
COMPLETE PART NO. MUST BE MARKED ON ALL RINGS.

TO BE USED WITH PACKINGS CONFORMING TO AN6225.

BALL IS USED FOR GAGING PURPOSES ONLY. BALL IS COMMERCIAL BALL BEARING.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005, ANGLES ±1°.

INACTIVE FOR DESIGN AFTER 16 DEC 1952. NO SUPERSEDING AN STANDARD.

APPROVED 11 Mar 42 REVISED ① 2 Sep 42 ② 14 Feb 44 ③ 15 Feb 51 ④ 16 DEC 52 ⑤ 10 DEC 71

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN6228
NONE	ADAPTER - "V" RING FEMALE HYDRAULIC PACKING	

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTE, SEE MIL-STD-32

SUPERSEDES USAF DRAWING NO. [illegible]

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all nonstandard drawings for the same product and shall become effective for the procurement of nonstandard supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:22Z
Check the source to verify that this is the current version before use.