



USER SYMBOLS
REVIEWER SYMBOLS
Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


FED. SUP CLASS
FSC 5340

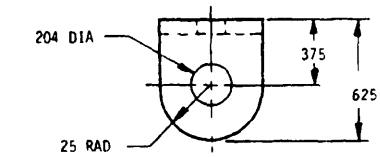


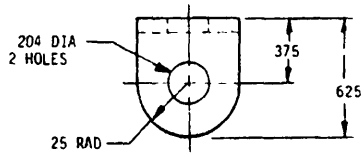


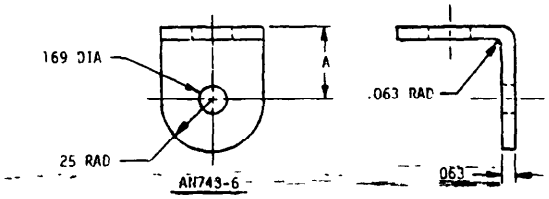


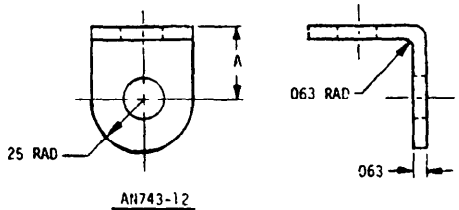


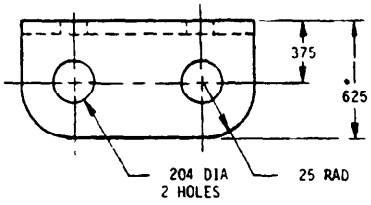


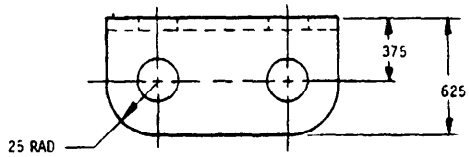


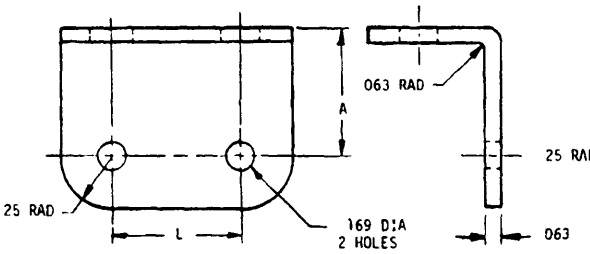


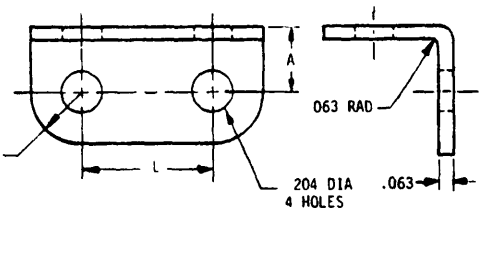


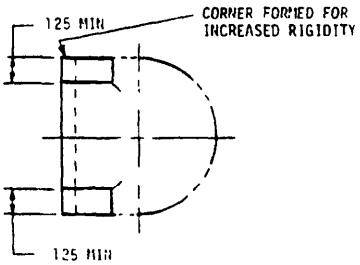

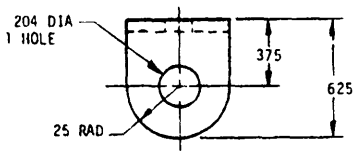

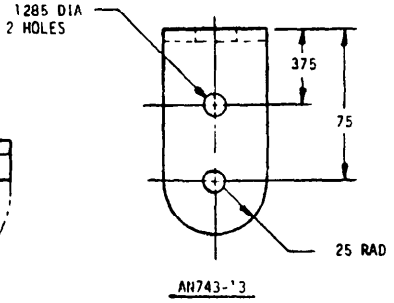



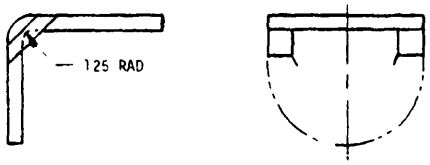

(6) CANCELLED AFTER 15 SEPT 1981 NO SUPERSEDING STANDARD
(7) REINSTATED AFTER 30 AUG 1982

(7) DENOTES CHANGE

APPROVED 21 JUN 44 REVISED (7) 16 AUG 82

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN743
NONE	BRACKET, SUPPORT CLAMP	SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO 22886

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.

	AN PART NO.	A	L ±.005	RECOMMENDED FOR USE WITH AN742	
				PLAIN CLAMP	CUSHION CLAMP
(a)	~~AN743-1~~	.59	.305	- 2 TO - 8 INCL	- 4C TO -10C INCL
	AN743-2	.59	.450	- 9 TO -16 INCL	-11C TO -18C INCL
	AN743-3	.59	1.180	-17 TO -32 INCL	-19C TO -34C INCL
	AN743-4	.59	1.680	-34 TO -48 INCL	-36C TO -50C INCL
	~~AN743-5~~	.59	2.180	-52 TO -64 INCL	-54C TO -66C INCL
(b)	~~AN743-6~~	~~.44~~		~~FOR ONE HOLE MOUNTING~~	
	AN743-7	.38	500	- 8 TO -11 INCL	-10C TO -13C INCL
	AN743-8		.625	-12 TO -15 INCL	-14C TO -17C INCL
	AN743-9		.750	-16 TO -24 INCL	-18C TO -26C INCL
	AN743-10		1.000	-25 TO -40 INCL	-27C TO -42C INCL
	AN743-11		1.500	FOR LONG BASE MOUNTING	
	AN743-12	.44		FOR ONE HOLE MOUNTING	
	AN743-13				

(a) PART NUMBERS AN743-1, -2, -3, -4, AND -5, INACTIVE FOR DESIGN AFTER 31 JULY 1945
PART NUMBERS AN743-7, -8, -9, -10, AND -11 REPLACE AND ARE INTERCHANGEABLE WITH AN743-1, -2, -3, -4, AND -5, RESPECTIVELY.

(b) PART NUMBER AN743-6 INACTIVE FOR DESIGN AFTER 21 APRIL 1950 PART NUMBER AN743-12 REPLACES AND IS INTERCHANGEABLE WITH AN743-6

MATERIAL: ALUMINUM ALLOY 2024, SPECIFICATION QQ-A-362, CONDITION T3 OR EXTRUDED SHAPES. AND10134-0602 AND AND10134-1001 SPECIFICATION QQ-A-267, TEMPER T4
STEEL; SPECIFICATION MIL-S-18729, CONDITION N.
CORROSION RESISTANT STEEL, SPECIFICATION MIL-S-5059, COMPOSTION 302, ANNEALED

HEAT TREAT SPECIFICTION MIL-R-6088, 50,000 PSI TENSILE STRENGTH MINIMUM.

FINISH ALUMINUM ALLOY ANODIZE, SPECIFICATION MIL-A-8625, TYPE I OR TYPE II, WHEN SPECIFIED.
STEEL, CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE II, CLASS 3
CORROSION RESISTANT STEEL, NONE

ADD C BEFORE DASH NUMBER FOR CORROSION RESISTANT STEEL BRACKET

ADD P BEFORE DASH NUMBER FOR STEEL BRACKET, CADMIUM PLATED

ADD B IN PLACE OF DASH TO DESIGNATE INCORPORATION OF REINFORCING CORNER BEADS

ADD Z IN PLACE OF DASH FOR ANODIZED ALUMINUM ALLOY.

EXAMPLES OF PART NUMBERS: AN743-7 = BRACKET, SUPPORT CLAMP, ALUMINUM ALLOY
AN743-C7 = BRACKET, SUPPORT CLAMP, CORROSION RESISTANT STEEL
AN743-P7 = BRACKET, SUPPORT CLAMP, STEEL, CADMIUM PLATED.
AN743BP7 = BRACKET, SUPPORT CLAMP, STEEL, CADMIUM PLATED, INCORPORATING REINFORCING CORNER BEADS

ALUMINUM ALLOY PARTS, CODED R, WILL HAVE THICKNESS REDUCED TO .050

STEEL PARTS CODED R WILL HAVE THICKNESS REDUCED TO .040.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES: UNLESS OTHERWISE SPECIFIED, TOLERANCES: THREE PLACE DECIMALS ± .010, TWO PLACE DECIMALS ± .02

APPROVED 21 JUN 44 REVISED (7) FOR CHANGES SEE SHEETS 1 & 2

USER SYMBOLS
REVIEWER SYMBOLS
Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN743
NONE	BRACKET, SUPPORT CLAMP	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.