
FED. SUP CLASS
4730

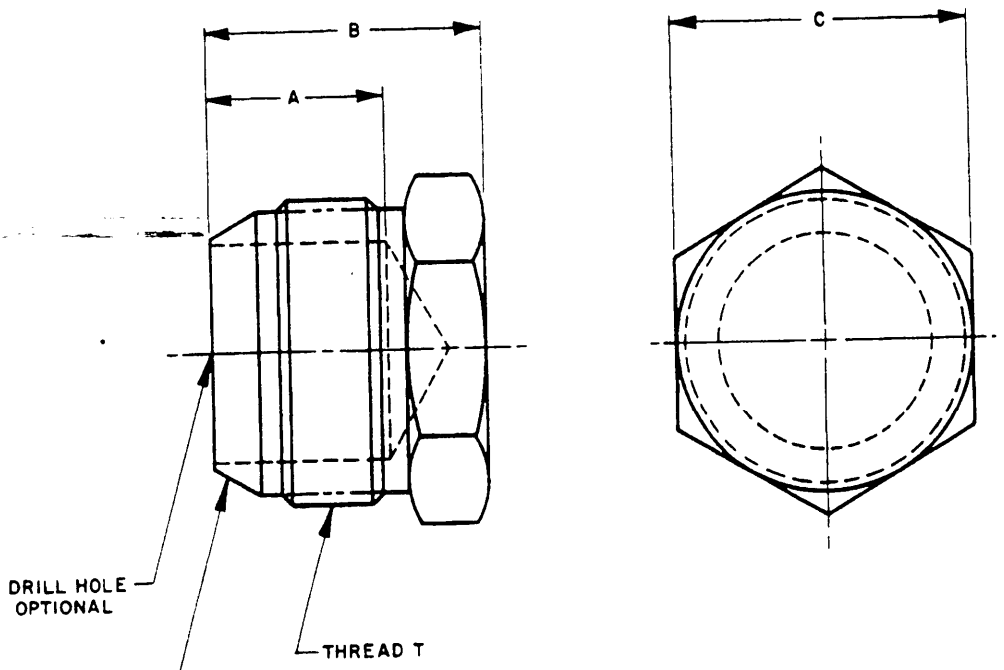


MATERIAL: STEEL - BAR OR ROD.
TITANIUM ALLOY - BARS, SHAPES OR FORGINGS.
ALUMINUM ALLOY - BAR OR ROD.
CORROSION RESISTANT STEEL - BARS, SHAPES OR FORGINGS.
SEE PROCUREMENT SPECIFICATION.

FINISH: SEE PROCUREMENT SPECIFICATION.

NO CODE LETTER IN PART NUMBER FOR STEEL.
ADD D IN FRONT OF DASH NUMBER FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
ADD J IN FRONT OF DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 304.
ADD K IN FRONT OF DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 316.
ADD S IN FRONT OF DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 347.
ADD T IN FRONT OF DASH NUMBER FOR TITANIUM.
ADD W IN FRONT OF DASH NUMBER FOR 7075-T73.

EXAMPLE OF PART NUMBERS:
AN806-8 - PLUG, 1/2 TUBING, STEEL.
AN806-D8 - PLUG, 1/2 TUBING, ALUMINUM ALLOY (EXCEPT 7075-T73).
AN806-J8 - PLUG, 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 304.
AN806-K8 - PLUG, 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 316.
AN806-S8 - PLUG, 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 347.
AN806-T8 - PLUG, 1/2 TUBING, TITANIUM.
AN806-W8 - PLUG, 1/2 TUBING, 7075-T73.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64.

TITANIUM NOT TO BE USED IN OXYGEN SYSTEMS.

(7) ENTIRE STANDARD REVISED

APPROVED 5 JAN 45 REVISED (6) 16 APRIL 82 (7) 17 AUG 83

USER ACTIVITIES

REVIEWER ACTIVITIES DLA-CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

| | | | |
|---|---|---|---|
| P. A. AIR FORCE - 82 Other Cust ARMY - AV NAVY - AS AIR FORCE - 99 | INTERNATIONAL INTEREST | AIR FORCE - NAVY AERONAUTICAL STANDARD | AN806 |
| PROCUREMENT SPECIFICATION MIL-F-5509 | SUPERSEDES: | PLUG - FLARED TUBE | SHEET 1 OF 2 |

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:16Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

| DASH NO. | TUBING OD | THREAD T (REF) | A | B | C | |
|---|---|---|---|---|---|---|
| AN806-2 | 1/8 | 5/16-24UNJF-3A | 15/32 | 41/64 | .438 | +.003 -.004 |
| AN806-3 | 3/16 | 3/8 -24UNJF-3A | | 43/64 | | |
| AN806-4 | 1/4 | 7/16-20UNJF-3A | 17/32 | 47/64 | | |
| AN806-5 | 5/16 | 1/2 -20UNJF-3A | | 49/64 | .500 | |
| AN806-6 | 3/8 | 9/16-18UNJF-3A | 9/16 | 13/16 | .563 | ±.004 |
| AN806-8 | 1/2 | 3/4 -16UNJF-3A | 5/8 | 15/16 | .750 | |
| AN806-10 | 5/8 | 7/8 -14UNJF-3A | 49/64 | 1- 7/64 | .875 | |
| AN806-12 | 3/4 | 1-1/16-12UNJ -3A | 13/16 | 1-13/64 | 1.125 | ±.005 |
| AN806-16 | 1 | 1-5/16-12UNJ -3A | | 1- 9/32 | 1.375 | |
| AN806-20 | 1-1/4 | 1-5/8 -12UNJ -3A | 1 3/4 | 1-23/64 | 1.688 | ±.016 |
| AN806-24 | 1-1/2 | 1-7/8 -12UNJ -3A | 13/16 | 1-31/64 | 2.000 | |
| AN806-28 | 1-3/4 | 2-1/4 -12UNJ -3A | 25/32 | 1-39/64 | 2.375 | ±.020 |
| AN806-32 | 2 | 2-1/2 -12UNJ -3A | 53/64 | 1-47/64 | 2.625 | |

APPROVED 5 JAN 45 REVISED (7) FOR CHANGES SEE PAGES 1 & 2.

USER ACTIVITIES:

REVIEWER ACTIVITIES: DLA-CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

(7) ENTIRE STANDARD REVISED

P. A.
AIR FORCE - 82
Other Cust
ARMY - AV
NAVY - AS
AIR FORCE - 99

INTERNATIONAL INTEREST

AIR FORCE-NAVY AERONAUTICAL STANDARD

PLUG - FLARED TUBE

AN806

PROCUREMENT SPECIFICATION
MIL-F-5509

SUPERSEDES:

SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:16Z
Check the source to verify that this is the current version before use.