
FED. SUP CLASS
4730

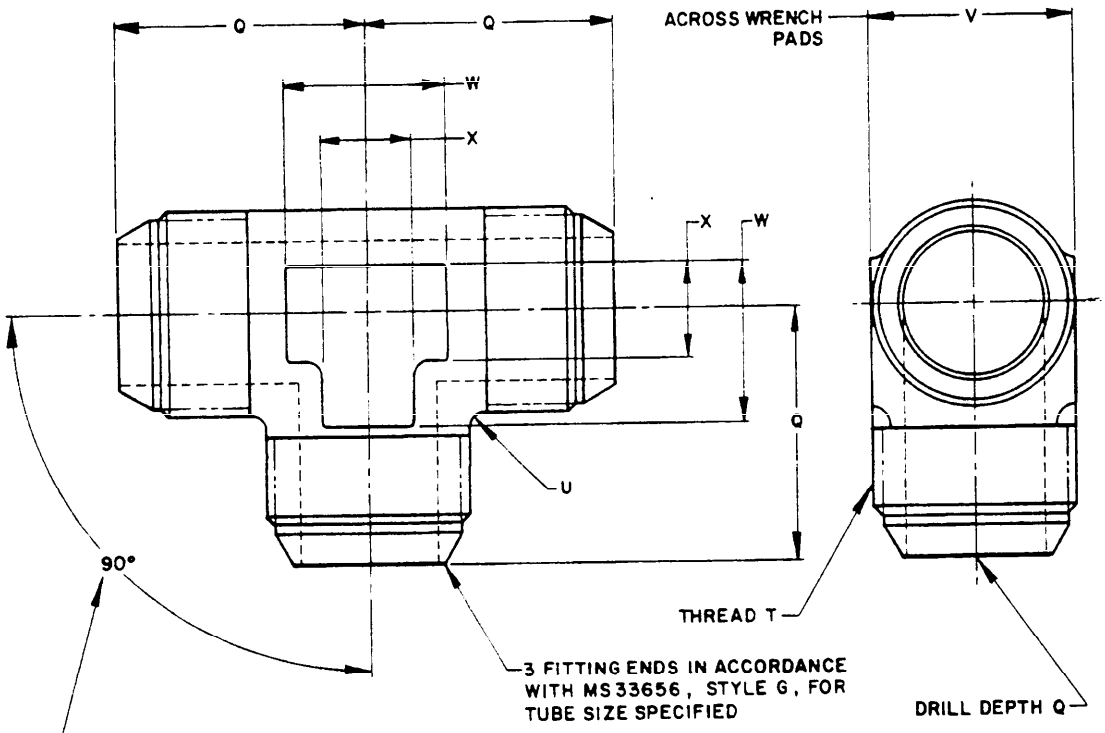

MATERIAL: STEEL - BARS, SHAPES OR FORGINGS.
ALUMINUM ALLOY - BARS, SHAPES OR FORGINGS.
TITANIUM ALLOY - BARS, SHAPES OR FORGINGS.
CORROSION RESISTANT STEEL - BARS, SHAPES OF FORGINGS.

FINISH: SEE PROCUREMENT SPECIFICATIONS.

NO CODE LETTER IN PART NUMBER FOR STEEL.
ADD D AFTER DASH NUMBER FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
ADD J AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 304.
ADD K AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 316.
ADD S AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 347.
ADD T AFTER DASH NUMBER FOR TITANIUM
ADD W AFTER DASH NUMBER FOR 7075-T73.

EXAMPLE OF PART NUMBERS:
AN824-4 - TEE, 1/4 TUBING, STEEL.
AN825-4D - TEE, 1/4 TUBING, ALUMINUM ALLOY (EXCEPT 7075-T73).
AN824-8J - TEE, 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 304.
AN824-8K - TEE, 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 316.
AN824-8S - TEE, 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 347.
AN824-8T - TEE, 1/2 TUBING, TITANIUM.
AN924-8W - TEE, 1/2 TUBING, 7075-T73.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005., ANGLES ±1/2°.

TITANIUM NOT TO BE USED IN OXYGEN SYSTEMS.

APPROVED 13 DEC 40 REVISED (6) 16 APRIL 82 (7) 5 Oct 83

(7) ENTIRE STANDARD REVISED

P.A. AIR FORCE - 82 Other Cust ARMY - AV NAVY - AS AIR FORCE-99	INTERNATIONAL INTEREST	AIRFORCE-NAVY AERONAUTICAL STANDARD	AN824
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES:	TEE - FLARED TUBE	SHEET 1 OF 2

DD FORM (MAY 71) 672-1 (COORDINATED) PREV EDITIONS OF THIS FORM ARE OBSOLETE

USER ACTIVITIES

REVIEWER ACTIVITIES
DLA-CS
ARMY-MI

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

PROJECT 4730-0482

Source: https://assist.dla.mil -- Downloaded: 202610-26T14:16Z
Check the source to verify that this is the current version before use.

USER ACTIVITIES:

REVIEWER ACTIVITIES
DLA - CS
ARMY - MI

This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this
document

DASH NO.	TUBING OD	THREAD T (REF)	Q +.3/64 -0	U RAD	V ±.005	W APPROX	X APPROX
2	1/8	5/16-24UNJF-3A	47/64	1/16	5/16	5/16	3/16
3	3/16	3/8 -24UNJF-3A	51/64		3/8	3/8	1/4
4	1/4	7/16-20UNJF-3A	55/64		7/16		
5	5/16	1/2 -20UNJF-3A	59/64		1/2	15/32	5/16
6	3/8	9/16-18UNJF-3A	1- 1/32	3/32	9/16	1/2	
8	1/2	3/4 -16UNJF-3A	1- 7/32		3/4	11/16	7/16
10	5/8	7/8 -14UNJF-3A	1-27/64	1/8	7/8	25/32	
12	3/4	1-1/16-12UNJ -3A	1- 5/8		1- 1/16	29/32	1/2
16	1	1-5/16-12UNJ -3A	1-25/32		1- 5/16	1- 3/32	5/8
20	1-1/4	1-5/8 -12UNJ -3A	2-1/32		1- 5/8	1- 5/16	3/4
24	1-1/2	1-7/8 -12UNJ -3A	2-19/64		1- 7/8	1- 1/2	7/8
28	1-3/4	2-1/4 -12UNJ -3A	2-25/32		2- 1/4	1-25/32	1-1/16
32	2	2-1/2 -12UNJ -3A	3- 1/32	3/16	2- 9/16	2- 1/32	1-3/16

APPROVED 13 DEC 40 REVISED (7) FOR CHANGES SEE PAGES 1 & 2.

(7) ENTIRE STANDARD REVISED

P. A.
AIR FORCE-82
Other Cust
ARMY - AV
NAVY - AS
AIR FORCE-99

INTERNATIONAL INTEREST

AIR FORCE-NAVY AERONAUTICAL STANDARD

TEE - FLARED TUBE

AN824

PROCUREMENT SPECIFICATION
MIL-F-5509

SUPERSEDES:

SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:16Z
Check the source to verify that this is the current version before use.