FED. SUP CLASS
4730

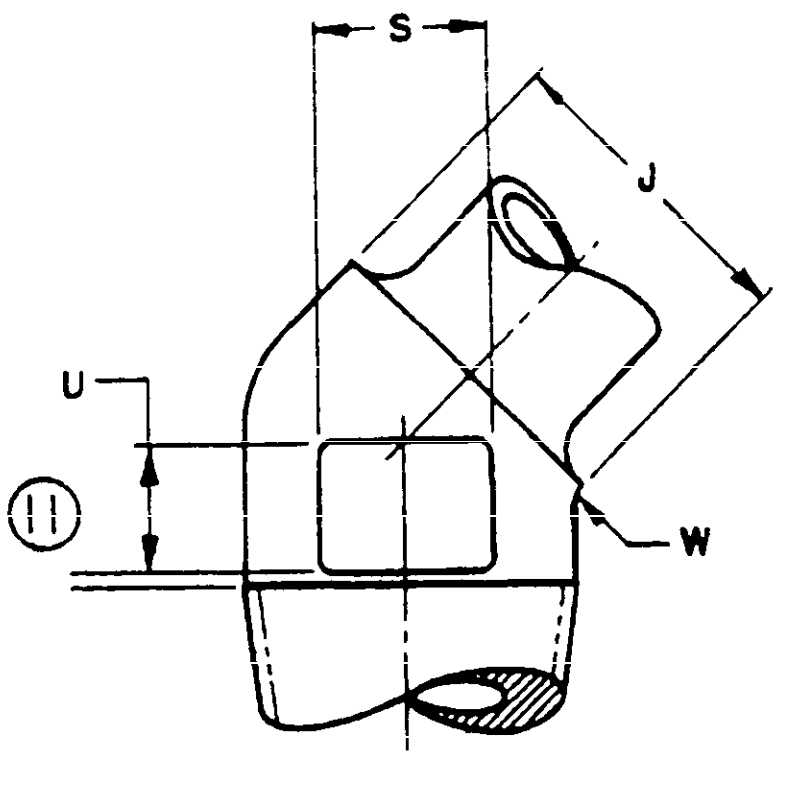

WRENCH PAD DETAIL

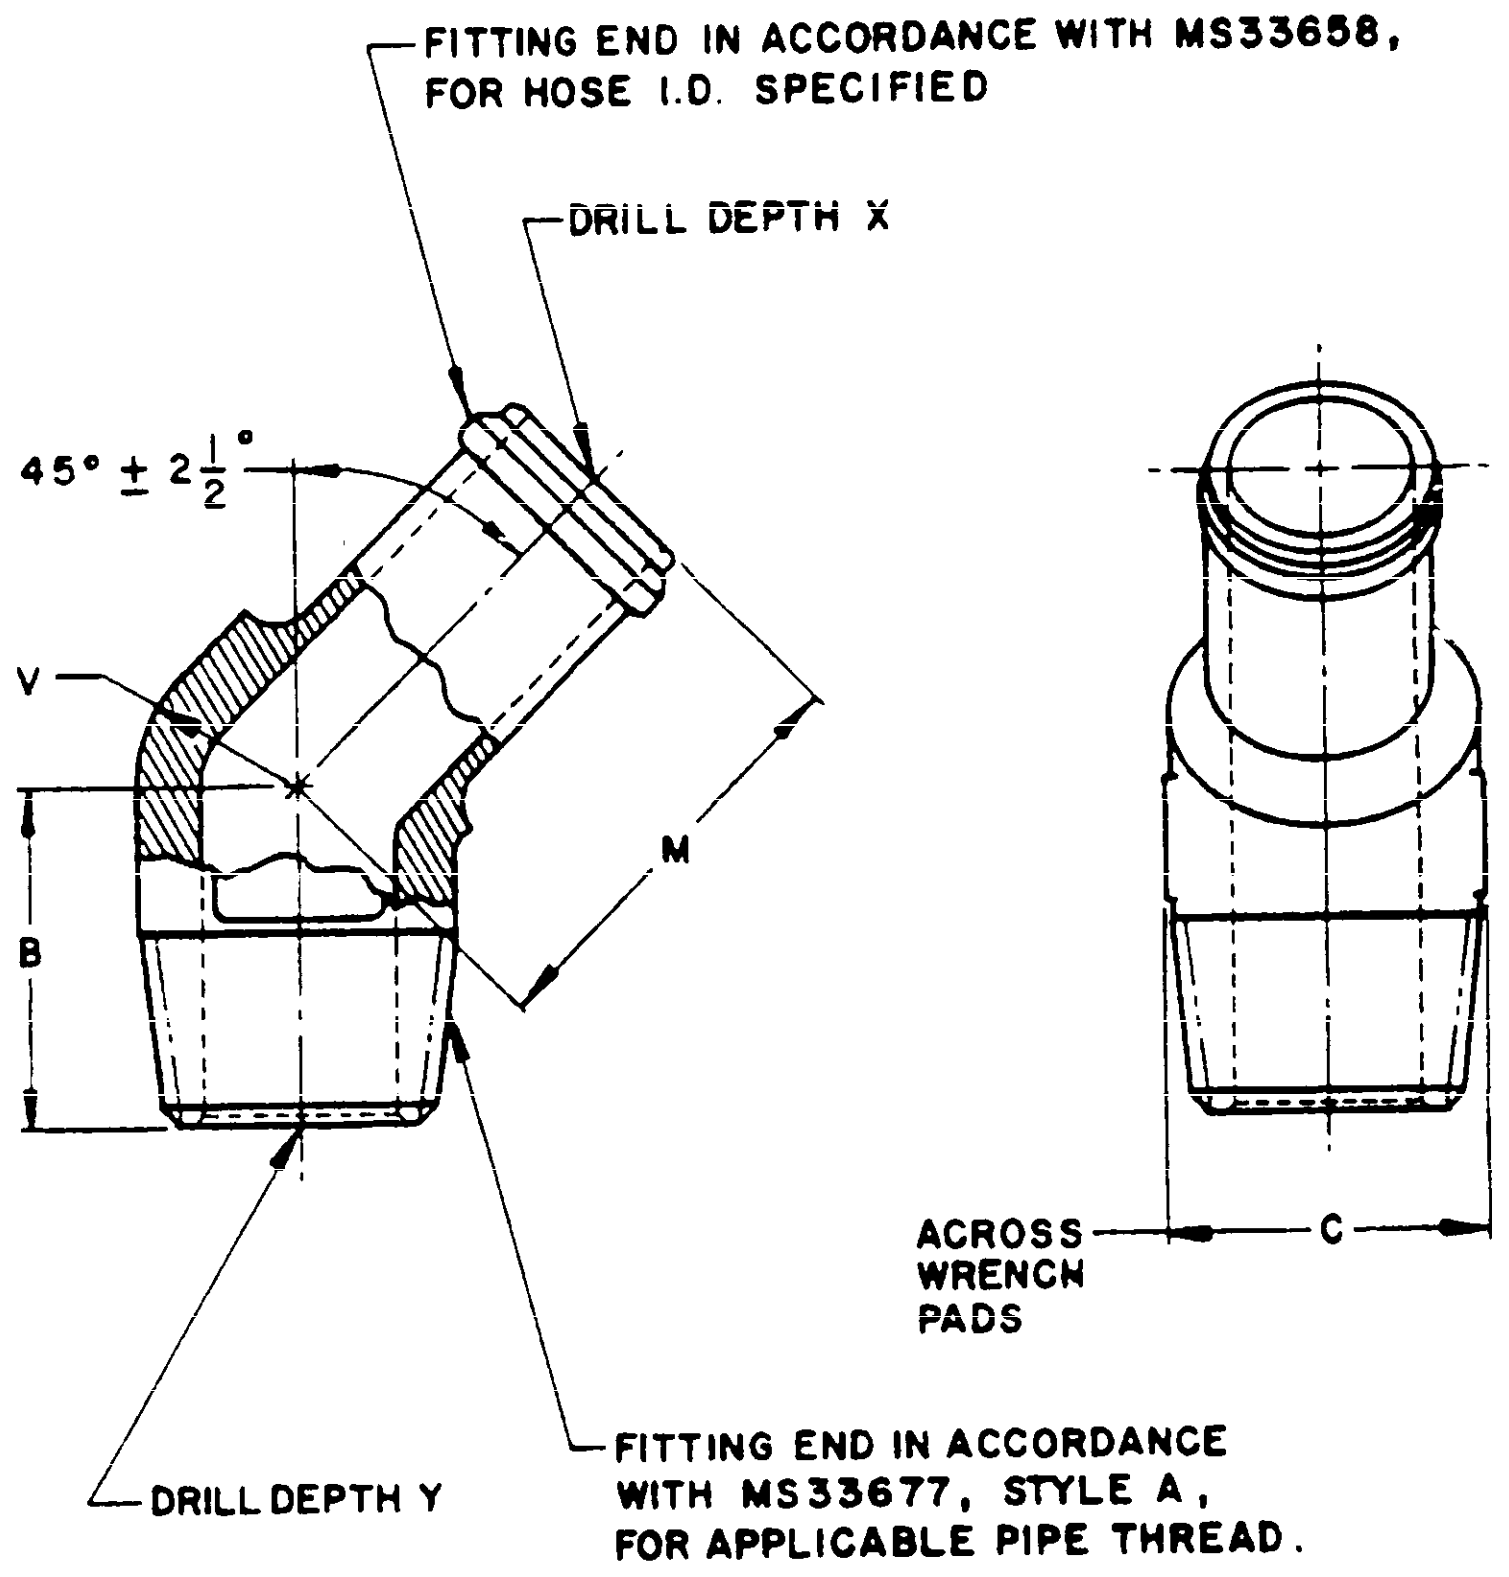

FITTING END IN ACCORDANCE WITH MS33658, FOR HOSE I.D. SPECIFIED
DRILL DEPTH X
45° ± 2½°
V
B
M
DRILL DEPTH Y
FITTING END IN ACCORDANCE WITH MS33677, STYLE A, FOR APPLICABLE PIPE THREAD.
ACROSS WRENCH PADS
C

ARMY - ME, AV
DLA - CS

Center, Battle Creek, MI. 49016, Department of the Air Force, and is available for use by all Departments and agencies of the Department of Defense.

⑪ MATERIAL: COPPER ALLOY; ALUMINUM ALLOY; STEEL;
SEE PROCUREMENT SPECIFICATION.

FINISH: SEE PROCUREMENT SPECIFICATION.

NO CODE LETTER IN PART NUMBER FOR COPPER ALLOY.
ADD D AFTER DASH NUMBER FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
ADD S AFTER DASH NUMBER FOR STEEL
ADD W AFTER DASH NUMBER FOR 7075-T73 ALUMINUM ALLOY.

EXAMPLE OF PART NUMBERS:
AN844-6 - ELBOW, 3/8 ID HOSE, COPPER ALLOY.
AN844-6D - ELBOW, 3/8 ID HOSE, ALUMINUM ALLOY (EXCEPT 7075-T73).
AN844-6S - ELBOW, 3/8 ID HOSE, STEEL.
AN844-6W - ELBOW, 3/8 ID HOSE, 7075-T73 ALUMINUM ALLOY.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: FRACTIONS ±1/64.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

INACTIVE FOR DESIGN AFTER 8 APRIL 1953. NO SUPERSEDING AN STANDARD. SEE MIL-STD-962 FOR STATUS CRITERIA.

APPROVED 27 FEB 41 REVISED ⑩ 2 SEP 82 ⑪ 17 May 84

P. A. AIR FORCE - 82 Other Cust AIR FORCE - 99	INTERNATIONAL INTEREST	**AIR FORCE-NAVY AERONAUTICAL STANDARD** **ELBOW, PIPE TO HOSE, 45°**	**AN844**
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 *Limited Coordination*

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT 4730-F606

Source: https://assist.dla.mil -- Downloaded: 202640-26T14:17Z
Check the source to verify that this is the currentversion before use.

FED. SUP CLASS
4730

DASH NO.	HOSE ID	PIPE THD NPT	B +3/64 -0	C	J DIA	M +3/64 -0
4	1/4	1/8	5/8	7/16	7/16	1- 5/8
6	3/8	1/4	7/8	5/8	37/64	1-11/16
8	1/2	3/8	59/64	3/4	23/32	1-23/32
10	5/8	1/2	1- 5/32	15/16	57/64	1-25/32
12	3/4	3/4	1-13/64	1- 1/8	1- 3/32	1-13/16
16	1					
17		1	1-31/64	1- 3/8	1- 3/8	1- 7/8
20	1-1/4	1-1/4	1- 1/2	1- 3/4	1-23/32	1-15/16
21		1	1-31/64	1- 3/8	1- 3/8	1- 7/8
24	1-1/2	1-1/2	1- 9/16	2	1-61/64	2
25		1-1/4	1- 7/16	1- 3/4	1-23/32	

DASH NO.	S APPROX	U APPROX	V RAD	W RAD	X +3/64 -0	Y +3/64 -0
4	5/16	7/32	7/32	1/16	1-43/64	21/32
6	3/8	9/32	9/32		1- 3/4	15/16
8	1/2	5/16	23/64	3/32	1-51/64	1
10	5/8	3/8	7/16		1-57/64	1-17/64
12		7/16	35/64	1/8	1-15/16	1-23/64
16					2	
17	3/4	9/16	11/16		2- 1/16	1-43/64
20	15/16		55/64		2- 5/32	1-23/32
21	3/4		11/16		2- 7/64	1-43/64
24	1- 1/8	5/8	31/32		2- 9/32	1-27/32
25			55/64			1-21/32

USER ACTIVITIES:

REVIEWER ACTIVITIES:
ARMY-ME, AV
DLA-CS

This Military Standard is approved for use by HQ AFLC CASO/LODS, Federal Center, Battle Creek, MI 49016, Department of the Air Force, and is available for use by all Departments and agencies of the Department of Defense.

APPROVED 27 FEB 41 REVISED (1) FOR CHANGES SEE PAGE 1

P. A. AIR FORCE-82 Other Cust AIR FORCE-99	INTERNATIONAL INTEREST	**AIRFORCE-NAVY AERONAUTICAL STANDARD** **ELBOW, PIPE TO HOSE, 45°**	**AN844**
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 *Limited Coordination*

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-26T14:17Z
Check the source to verify that this is the currentversion before use.