FED. SUP. CLASS
4730

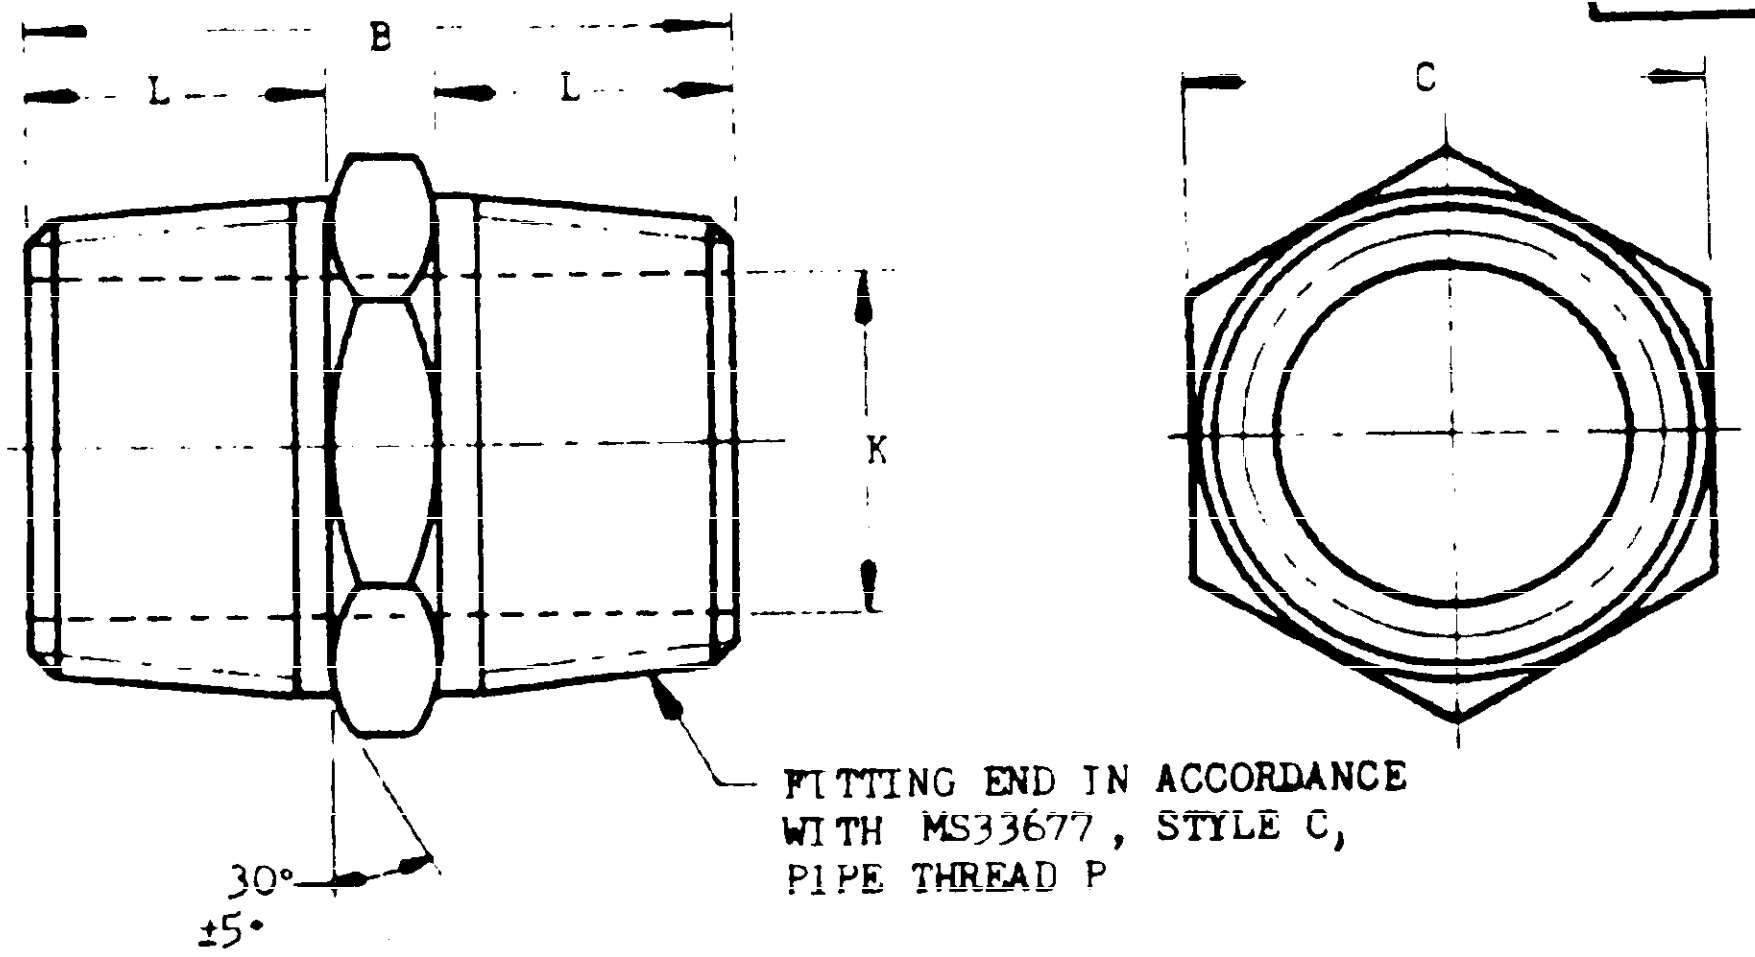

FITTING END IN ACCORDANCE WITH MS33677, STYLE C, PIPE THREAD P

MATERIAL: COPPER ALLOY, ALUMINUM ALLOY; BARS OR SHAPES.
CORROSION RESISTANT STEEL (CRES), TITANIUM ALLOY; BARS, SHAPES OR FORGINGS.
SEE PROCUREMENT SPECIFICATION.

FINISH: SEE PROCUREMENT SPECIFICATION.

NO CODE LETTER IN PART NUMBER FOR COPPER ALLOY.
⑨ ADD D AFTER DASH NUMBER FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
~~ADD C AFTER DASH NUMBER FOR CRES, TYPE 302, 303, 304, 316, AND 321.~~
ADD J AFTER DASH NUMBER FOR CRES, TYPE 304.
ADD K AFTER DASH NUMBER FOR CRES, TYPE 316.
ADD S AFTER DASH NUMBER FOR CRES, TYPE ~~304L AND~~ 347. PARTS ARE NOT TO BE MANUFACTURED FROM TYPE 304L STEEL AFTER 10 FEBRUARY 1967.
ADD T AFTER DASH NUMBER FOR TITANIUM ALLOY.
⑨ ADD W AFTER DASH NUMBER FOR 7075-T73 ALUMINUM ALLOY.
TITANIUM IS NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.
⑨ ITEMS CODED C ON PREVIOUS ISSUES OF THIS STANDARD ARE NO LONGER TO BE FURNISHED. PROCURING ACTIVITIES MUST SPECIFY APPLICABLE CRES MATERIAL CODE AS PART OF THE STANDARD PART NUMBER.

EXAMPLE OF PART NUMBERS:

AN911-6 - NIPPLE, 3/4 PIPE, COPPER ALLOY.
⑨ AN911-6D - NIPPLE, 3/4 PIPE, ALUMINUM ALLOY (EXCEPT 7075-T73).
~~AN911-6C - NIPPLE, 3/4 PIPE, CRES, TYPE 302, 303, 304, 316, OR 321.~~
AN911-6J - NIPPLE, 3/4 PIPE, CRES, TYPE 304.
AN911-6K - NIPPLE, 3/4 PIPE, CRES, TYPE 316.
AN911-6S - NIPPLE, 3/4 PIPE, CRES, TYPE 347.
AN911-6T - NIPPLE, 3/4 PIPE, TITANIUM ALLOY.
⑨ AN911-6W - NIPPLE, 3/4 PIPE, 7075-T73 ALUMINUM ALLOY.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.010.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

INACTIVE FOR DESIGN AFTER 1 JUNE 1954, EXCEPT FOR USE ON OXYGEN SYSTEMS AND GROUND SERVICE EQUIPMENT. SEE MIL-STD-[illegible] FOR STATUS CRITERIA.

⑨ denotes changes

REVISED ⑧ 16 JUN 78 ⑨ 20 MAR 79

APPROVED 6 [illegible] 41

The following standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - ME,AV; Navy - AS; Air Force - 99; DLA-CS ⑨

User activities: Army - ME,AV; Navy - AS; Air Force - 99

P A Air Force-[illegible] Other Cust	International interest	AIR FORCE - NAVY AERONAUTICAL STANDARD NIPPLE, PIPE	AN911
Procurement Specification MIL-F-5509		SUPERSEDES	PAGE 1 OF 2

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

4730-[illegible]

Source: https://assist.dla.mil -- Downloaded: 202610-26T14:17Z
Check the source to verify that this is the currentversion before use.

FED. SUP. CLASS
4730

DASH NO.	THREAD P ANPT	B ±1/32	C		K DIA		L	WEIGHT MAX (LBS.)			
								COPPER ALLOY	AL ALLOY	CRES	TI ALLOY
1	1/8	31/32	.438	+.003 -.004	.203	+.003 -.004	25/64	.027	.009		
2	1/4	1-7/16	.625	±.004	.279	±.004	19/32	.072	.024		
3	3/8	1-15/32	.750		.418	+.006 -.007		.093	.031		
4	1/2	1-27/32	.938		.508	±.010	49/64	.186	.062		
6	3/4	1-29/32	1.125	±.005	.727	+.009 -.010	25/32	.249	.083		
8	1	2-5/16	1.375		.914	±.010	31/32	.444	.148		
10	1-1/4	2-11/32	1.750	±.016	1.256	±.008	63/64	.606	.202		

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities
Army - [illegible]
Navy - AS
Air Force - 99
DLA-CS

Custodians
Army - [illegible]
Navy - AS
Air Force - [illegible]

REVISED ⑨ For changes see page i. 20 MAR [illegible]

APPROVED 6 [illegible] 41

P A Air Force - [illegible] Other Cust	International interest	**AIR FORCE - NAVY AERONAUTICAL STANDARD** NIPPLE, PIPE	**AN911**
Procurement Specification MIL-P-550[illegible]		SUPERSEDES	PAGE OF

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.