
FED. SUP CLASS
4730

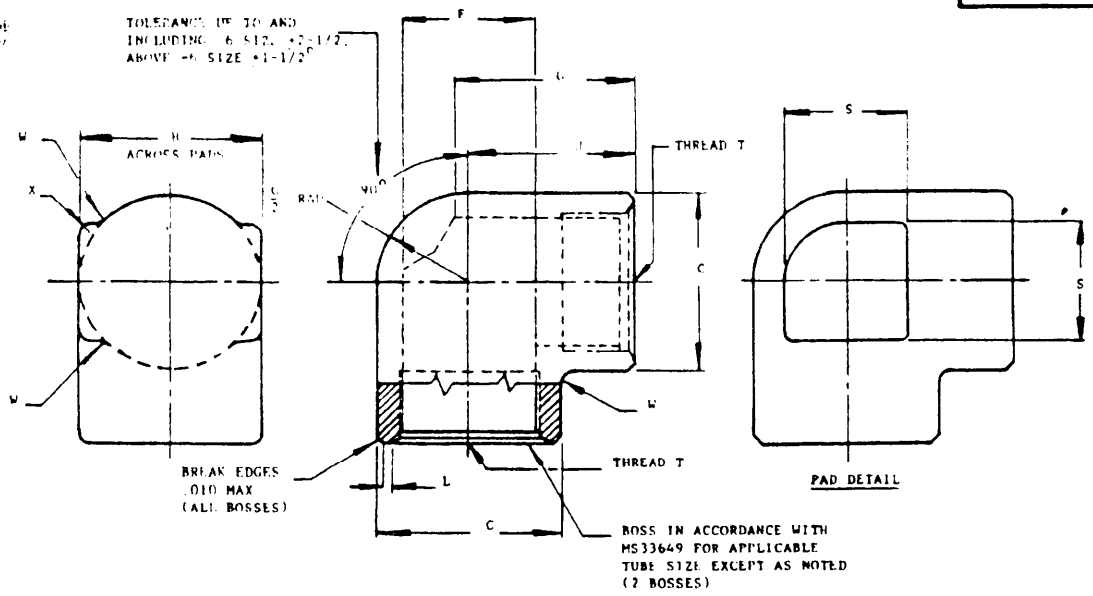

SQUARENESS BETWEEN THREAD T AND FACE OF BOSS SHALL CONFORM TO MS33649 AS SPECIFIED.
MATERIAL: STEEL, ALUMINUM ALLOY; SHAPES OR FORGINGS.
CORROSION RESISTANT STEEL (CRES), TITANIUM ALLOY; BARS, SHAPES, OR FORGINGS.
SEE PROCUREMENT SPECIFICATION.
FINISH: SEE PROCUREMENT SPECIFICATION.
NO CODE LETTER IN PART NUMBER FOR STEEL.
ADD D IN PLACE OF DASH FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
ADD J IN PLACE OF DASH FOR CRES, TYPE 304.
ADD K IN PLACE OF DASH FOR CRES, TYPE 316.
ADD S IN PLACE OF DASH FOR CRES, TYPE 347. PARTS ARE NOT TO BE MANUFACTURED FROM TYPE 304L STEEL AFTER 10 FEBRUARY 1967.
ADD T IN PLACE OF DASH FOR TITANIUM ALLOY. TITANIUM IS NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.
ADD W IN PLACE OF DASH FOR 7075-T73 ALUMINUM ALLOY.
ITEMS CODED C ON PREVIOUS ISSUES OF THIS STANDARD ARE NO LONGER TO BE FURNISHED. PROCURING ACTIVITIES MUST SPECIFY APPLICABLE CRES MATERIAL CODE AS PART OF THE STANDARD PART NUMBER.
EXAMPLES OF PART NUMBERS:
AN939-8 - ELBOW, 1/2 TUBING, STEEL.
AN939D8 - ELBOW, 1/2 TUBING, ALUMINUM ALLOY (EXCEPT 7075-T73).
AN939J8 - ELBOW, 1/2 TUBING, CRES, TYPE 304.
AN939K8 - ELBOW, 1/2 TUBING, CRES, TYPE 316.
AN939S8 - ELBOW, 1/2 TUBING, CRES, TYPE 347.
AN939T8 - ELBOW, 1/2 TUBING, TITANIUM ALLOY.
AN939W8 - ELBOW, 1/2 TUBING, 7075-T73 ALUMINUM ALLOY.
BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: FRACTIONS ±1/64.
ALUMINUM ALLOY FITTINGS, SIZES -10 THROUGH -20, SHALL NOT BE USED AT WORKING PRESSURES ABOVE 1500 PSI.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 27 JAN 50 REVISED (7) 22 Mar 84

(7) ENTIRE STANDARD REVISED

P. A. (7) Air Force - 82 Other Cust Air Force - 99	INTERNATIONAL INTEREST	TITLE: ELBOW, TUBE, INTERNAL THREAD, 90°	MILITARY STANDARD AN939
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES: AN927		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT 4730-0208

USER ACTIVITIES ARMY - MI

REVIEWER ACTIVITIES ARMY - ME, AV, DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

USER ACTIVITIES: ARMY - MI

REVIEWER ACTIVITIES: Army - ME, AV,
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this
document

DASH NO.	TUBING OD	THREAD (REF)	C DIA	F ±.005	G ±1/64	H	J ±1/64	L MIN LANDING	M MIN RAD	N MIN RAD	WEIGHT MAX (LBS) TFE	AL ALLOY	CRES	CI ALLOY
4	1/4	7/16-20UNJF-3B	11/16	.797	13/16	3/4	1/4	.960	1/2	1/32	1/32			
5	5/16	1/2-20UNJF-3B	3/4	.859	7/8	13/16	11/16		9/16					
6	3/8	9/16-18UNJF-3B	13/16	.918		13/16								
8	1/2	3/4-16UNJF-3B	1-1/16	.697	1-1/16	1-1/16	1	.971	11/16	1/16	3/32			
10	5/8	7/8-14UNJF-3B	1-3/16	.815	1-7/32	1-3/16	1-5/32		13/16					
12	3/4	1-1/16-12UNJ-3B	1-7/16	.991	1-31/64	1-7/16	1-23/64	.977	15/16	1/8	1/8			
16	1	1-5/16-12UNJ-3B	1-11/16	1.241	1-23/32	1-11/16	1-17/32		1-1/8					
20	1-1/4	1-5/8-12UNJ-3B	2	1.553	1-55/64	2	1-47/64		1-3/8	1/8				

APPROVED 27 JAN 50 REVISED (7) For changes see pages 1 and 2

P. A. Air Force - '82' Other Cost Air Force - 99	INTERNATIONAL INTEREST	TITLE ELBOW, TUBE, INTERNAL THREAD, 90°	MILITARY STANDARD AN939
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES: AN927		SHEET 2 OF 2

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT 4730-0208

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.