

FED. SUP. CLASS
4030

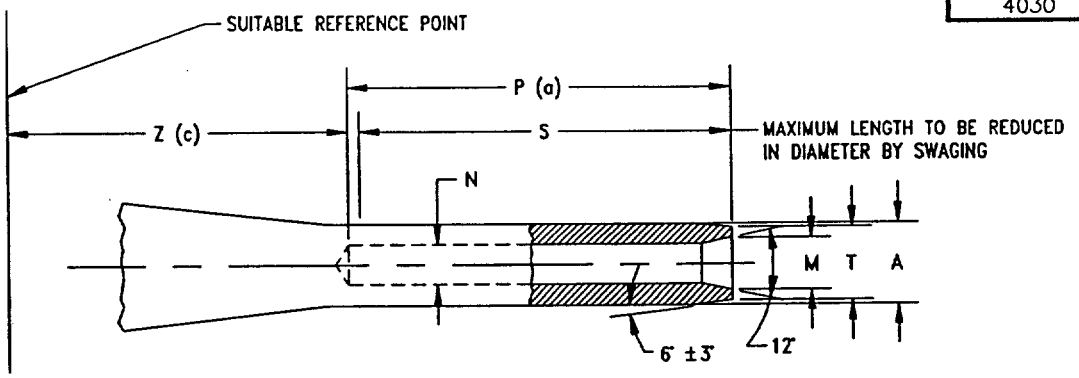

BEFORE SWAGING

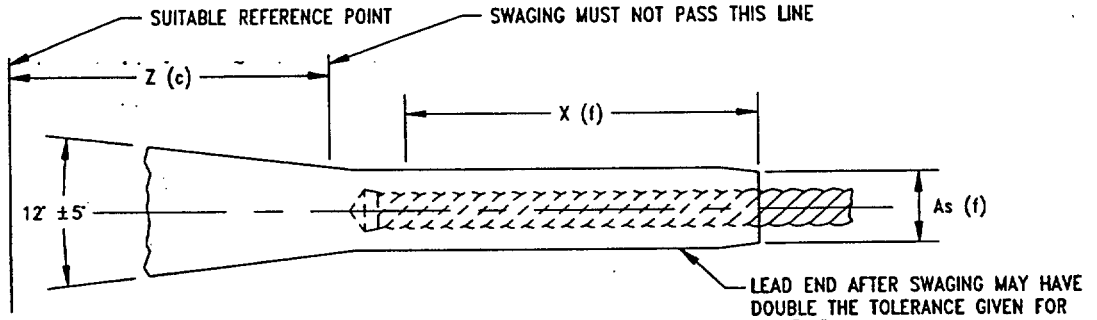

LEAD END AFTER SWAGING MAY HAVE DOUBLE THE TOLERANCE GIVEN FOR THE "As" DIA IN AREA OF ORIGINAL TAPER, PROVIDED THERE ARE NO RAPID DIMENSIONAL CHANGES IN CROSS SECTION OR EVIDENCE OF SPLITS, CRACKS, OR OTHER INJURIOUS DEFECTS.

AFTER SWAGING

REQUIREMENTS

(a) BORE "P" MAY EXTEND THROUGH THE ENTIRE TERMINAL IF SO INDICATED ON THE TERMINAL DETAIL DRAWING

(b) IN TERMINALS IN WHICH THE SWAGING OPERATION PRODUCES A LONGITUDINAL FIN OR PARTING LINE ON TWO DIAMETRICALLY OPPOSITE SIDES OF THE SWAGING PORTION, THE DIMENSIONS AS MEASURED ACROSS THE FINS OR PARTING LINES SHALL NOT EXCEED "As" BY MORE THAN .010 INCH

(c) DIMENSION "Z" SHALL BE SPECIFIED ON ALL DETAIL DRAWINGS WHICH DO NOT PROVIDE A SHOULDER SWAGING STOP

(d) SHANK "S" CABLE HOLE SHALL BE CONCENTRIC AND PARALLEL TO AXIS WITHIN "K" (2K FULL INDICATOR READING)

④ (e) THESE LOADS ARE APPLICABLE WHEN TERMINALS ARE SWAGED ONTO CABLE CONFORMING TO MIL-W-83420

(f) SWAGED TERMINALS WILL CONFORM TO "As" DIAMETER FOR LENGTH "X"; DIMENSION "X" SHALL BE SPECIFIED ON ALL DETAIL DRAWINGS

(g) REMOVE ALL BURRS AND SHARP EDGES

NOTES

1. DIMENSIONS IN INCHES
2. TERMINALS COVERED BY DRAWINGS MS21259, MS20667, MS20668, AND MS21260 SHALL BE USED WHENEVER POSSIBLE
3. THIS DRAWING IS FOR USE IN DESIGN OF SPECIAL TERMINALS OF CORROSION RESISTANT STEEL FOR USE ON AIRCRAFT AND APPLICATIONS WHERE MAXIMUM SAFETY AND MINIMUM WEIGHT ARE REQUIRED
4. SPECIAL TERMINALS INCORPORATING THE SWAGING TERMINAL SHANK SHALL BE MANUFACTURED IN ACCORDANCE WITH MIL-T-781

④ DENOTES CHANGE

APPROVED 11 MAY 45 REVISED ①21 JUN 51 ②03 JUNE 59 ③02 AUG 65 ④15 NOV 93

DISTRIBUTION STATEMENT A: Approved for public release, distribution is unlimited.
NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design not later than 6 months after the latest date of approval shown.
AMSC N/A

NOTICE: When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

REVIEWER SYMBOLS:
AIR FORCE-82

P.A. NAVY-AS CUSTODIANS: ARMY-AV AIR FORCE-99	AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD TERMINAL SHANK-SWAGING, DIMENSIONS FOR	AND10081
PROCUREMENT SPECIFICATION MIL-T-781	SUPERSEDES AND10081, REV 3	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A: Approved for public release, distribution is unlimited.
NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force - Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design not later than 6 months after the latest date of approval shown.
AMSC N/A

NOTICE: When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

REVIEWER SYMBOLS:
AIR FORCE-82

P.A.
NAVY-AS
CUSTODIANS:
ARMY-AV
AIR FORCE-99

PROCUREMENT SPECIFICATION
MIL-T-7081

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

TERMINAL SHANK SWAGING, DIMENSIONS FOR

AND10081

SHEET 2 OF 2

TABLE I. DIMENSIONS

NOMINAL CABLE DIAMETER REF ④	(e) MINIMUM ALLOWABLE BREAKING STRENGTH LB REF	TERMINAL DIMENSIONS BEFORE SWAGING: A DIAMETER		(d) K	M DIAMETER		N DIAMETER		(a) P DRILL DEPTH		S +.062 −.000	T DIAMETER		AFTER SWAGING: (b) As DIAMETER		(f) X MIN
.063	480	.160	+.000 −.005	.008	.090	+.010 −.000	.078	+.005 −.000	1.042	+.031 −.000	.969	.138	+.000 −.005	.138	+.000 −.005	.700
.094	920	.218			.119		.109		1.261		1.188	.190		.190		.800
.125	2,000	.250			.154		.141		1.511		1.438	.219		.219		1.050
.156	2,800	.297			.188		.172		1.761		1.688	.250		.250		1.290
.188	4,200	.359			.223		.203		2.011		1.938	.313		.313		1.310
.219	5,600	.427			.257		.234		2.261		2.188	.375	+.000 −.007	.375	+.000 −.007	1.550
.250	7,000	.494			.291		.265		2.511		2.438	.438		.438		1.700
.281	8,000	.563			.326		.297		2.761		2.688	.500	+.000 −.008	.500	+.000 −.008	1.890
.313	9,800	.635			.360		.328		3.011		2.938	.563		.563		2.060
.375	14,400	.703		.010	.430	+.012 −.000	.390	+.008 −.000	3.511	+.047 −.000	3.438	.625		.625		3.120
.438	17,600	.781			.514		.468		4.011		3.938	.688		.688		3.570
.500	22,800	.844			.584		.531	+.009 −.000	4.698		4.625	.750	+.000 −.009	.750	+.000 −.009	4.310
.563	28,500	.984			.653		.594		5.011		4.938	.875		.875		4.510
.625	35,000	1.109		.015	.722		.656	+.010 −.000	5.511	+.062 −.000	5.438	1.000	+.000 −.010	1.000	+.000 −.010	5.040
.750	49,600	1.359			.860		.781		6.511		6.438	1.250	+.000 −.012	1.250	+.000 −.012	5.800
.875	66,500	1.593	+.000 −.010	.020	1.013	+.015 −.000	.921	+.012 −.000	7.166		7.094	1.437		1.437		6.310
1.000	85,400	1.812			1.151		1.046		8.229		8.156	1.625		1.625		7.260
1.125	106,400	2.000			1.289		1.171		9.135	+.094 −.000	9.062	1.812		1.812		7.610
1.250	129,400	2.218			1.443	+.020 −.000	1.312	+.015 −.000	10.198		10.125	2.000	+.000 −.015	2.000	+.000 −.015	8.450
1.375	153,600	2.500			1.581		1.437		11.229		11.156	2.250		2.250		9.200
1.500	180,500	2.750			1.720		1.562		12.135	+.125 −.000	12.062	2.500		2.500		10.090

TABLE II. CABLE/ROPE PARTICULARS

PREFORMED STEEL CABLE OR WIRE ROPE	④ NOMINAL DIAMETER	.063	.094	.125	.156	.188	.219	.250	.281	.313	.375	.438	.500	.562	.625	.750	.875	1.000	1.125	1.250	1.375	1.500
	STRANDS BY WIRES/STRANDS	7 X 7		7 X 19								6 X 19										
	CENTERS OR CORES	STEEL STRAND										INDEPENDENT WIRE ROPE CENTER										
	MATERIAL	CORROSION RESISTANT, ZINC COATED OR TINNED STEEL																				

APPROVED 11 MAY 45 REVISED ④ SEE SHEET 1

FED. SUP. CLASS 4030

PROJECT No. 4030-0247

SUPERSEDES AND10081D dated: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.