

FED. SUP CLASS
2995

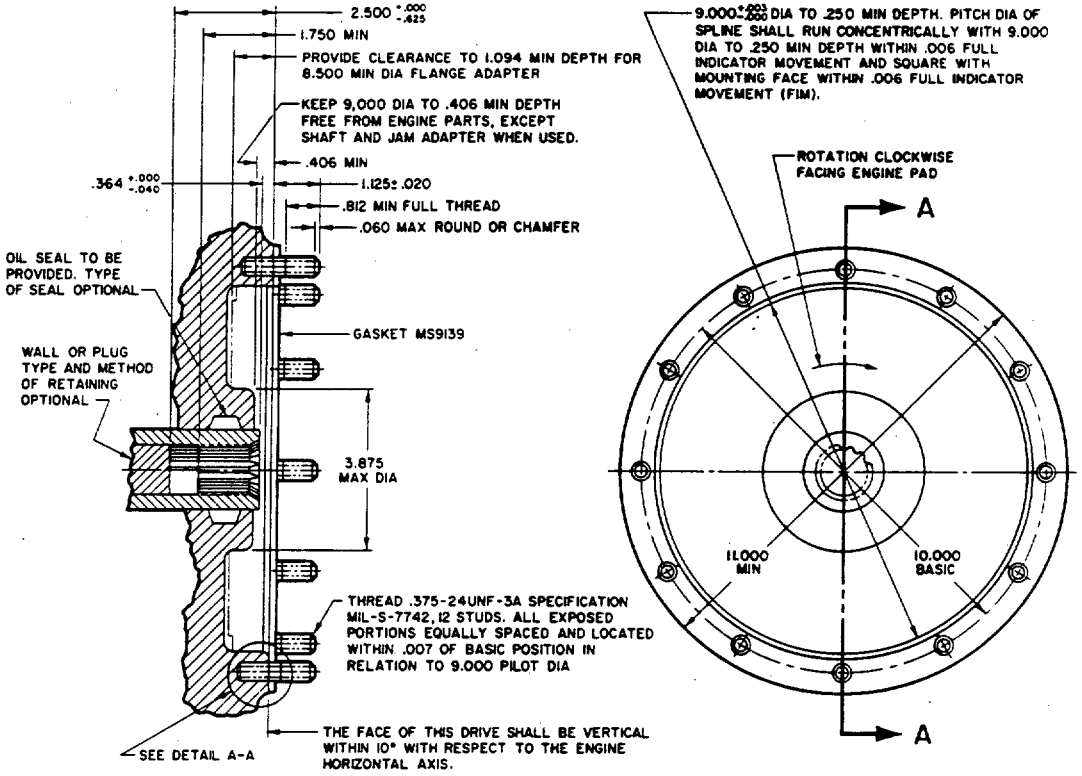


VIEW - SECTION A-A

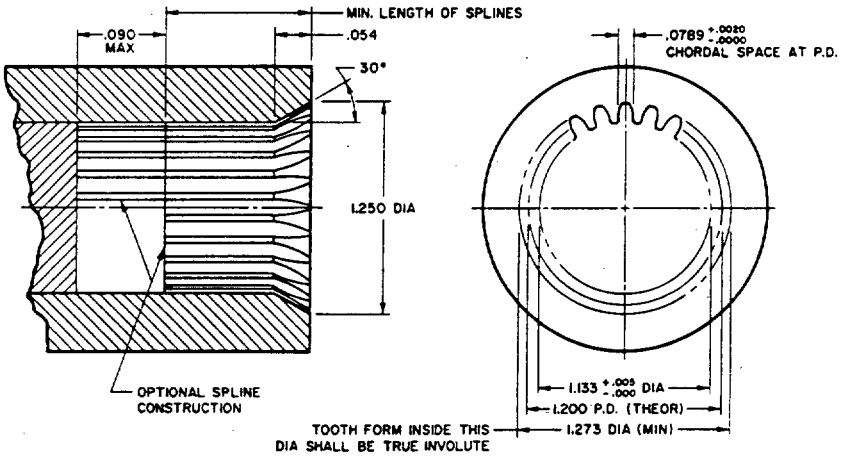


SPLINE DETAIL

SPLINE DATA

24 TEETH
20/30 PITCH
30° PRESSURE ANGLE
SURFACE HARDNESS ROCKWELL C58 MIN
MIN DEPTH OF EFFECTIVE CASE .010

INACTIVE FOR NEW DESIGN AFTER 8 FEB 1972

APPROVED 6 NOV 46 REVISED (6) 8 FEB 1972 (7) 22 MAY 1989

(7) ENTIRE STANDARD REVISED

DESIGN STANDARD

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

PA.
NAVY - AS
OTHER CUST
ARMY - AV

DRIVE-TYPE XVI ENGINE ACCESSORY

AND20006

SHEET 1 OF 2

AMSC N/A
APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:30Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

AMSC N/A
APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.
NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

FED. SUP CLASS
2995

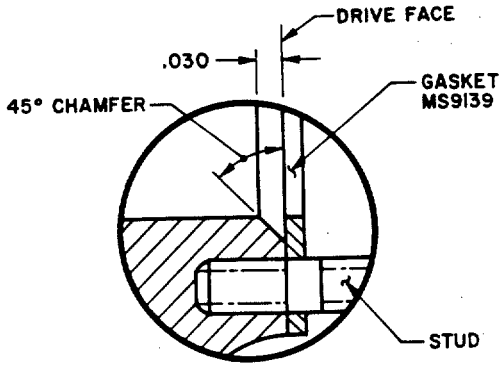


## DETAIL A-A

TABLE I. SPEED, STRENGTH, ACCESSORY DATA AND USAGE.

| TYPE | SPLINE PD | TORQUE LB-IN | | | SHAFT SPEED "S" RPM | ACCESSORY DATA | | | NOMINAL USE | ENGINE TYPE |
|---|---|---|---|---|---|---|---|---|---|---|
| | | CONTINUOUS TORQUE (Tc) | OVERLOAD TORQUE (To) | STATIC TORQUE (Ts) | | WEIGHT LB-MAX | OVERHUNG MOM. LB-IN | CLEARANCE | | |
| XVI-A | 1.200 | 1500 | 2250 | 6600 | 7500-8250 | 150 | 1250 | (b) AND10343 | PTO GENERATOR | RECIPROCATING |
| XVI-B | 1.200 | 1500 | 2250 | 6600 | (a) 6000 | 150 | 1250 | (b) AND10343 | PTO GENERATOR | TURBOJET & TURBOPROP |
| XVI-C | 1.200 | 2500 | 3750 | 11000 | 7500-8250 | 225 | 2500 | (b) AND10343 | PTO GENERATOR | RECIPROCATING |
| XVI-D | 1.200 | 2500 | 3750 | 11000 | (a) 6000 | 225 | 2500 | (b) AND10343 | PTO GENERATOR | TURBOJET & TURBOPROP |

(a) +400, -00 RPM WHEN THE ENGINE IS OPERATING AT 75% OF NORMAL SEA LEVEL STATIC OUTPUT.

(b) ACCESSORY CLEARANCE SHALL BE PROVIDED IN ACCORDANCE WITH MANUFACTURER'S MODEL SPECIFICATION.

REQUIREMENTS:

1. MATERIAL } IN ACCORDANCE WITH ENGINE SPECIFICATION.
2. FINISH }
3. DESIGN STRENGTH. THE DRIVE SHALL BE CAPABLE OF DRIVING CONTINUOUS TORQUE LOAD (Tc) AT ANY ENGINE SPEED. THE DRIVE SHALL WITHSTAND THE STATIC TORQUE (Ts) WITHOUT FAILURE OF PERMANENT DEFORMATION, AND SHALL BE ADEQUATE FOR FIVE (5) MINUTES PERIOD OF TORQUE OVERLOAD (To) OPERATION. OVERLOAD PERIODS SHALL BE CONSIDERED AS RECURRING AT FOUR (4) HOUR INTERVALS.
4. THE OIL LEAKAGE OUT OF THIS DRIVE SHALL NOT EXCEED 2 CC PER HOUR.
5. PAD OUTLINE AS DIMENSIONED IS A BASIC MINIMUM AREA REQUIREMENT.

NOTE:

1. REMOVE ALL BURRS AND SHARP EDGES.
2. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.
3. SPEED "S" IS DRIVE SHAFT SPEED AT NORMAL RATED ENGINE SPEED UNLESS OTHERWISE NOTED.
4. THIS DRAWING AND THE APPLICABLE ENGINE SPECIFICATIONS, TOGETHER, COMPLETELY DEFINE THE DESIGN REQUIREMENTS.
5. DATA FOR TYPE XVI-S AND XVI-T, SEE MS18054.
6. THE JAW ADAPTER WAS DELETED FOR CONVERTING TO TYPE XII ENGINE DRIVE DIMENSIONS. FOR TYPE XII ENGINE DRIVE (SEE AND20002).
7. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
8. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 6 NOV 46 REVISED (7) FOR CHANGES SEE SHEET 1 AND 2

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

P.A.
NAVY-AS
OTHER CUST
ARMY-AV

DRIVE-TYPE XVI ENGINE ACCESSORY

AND20006

SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:30Z
Check the source to verify that this is the current version before use.

PROJECT NO. 2995-N163