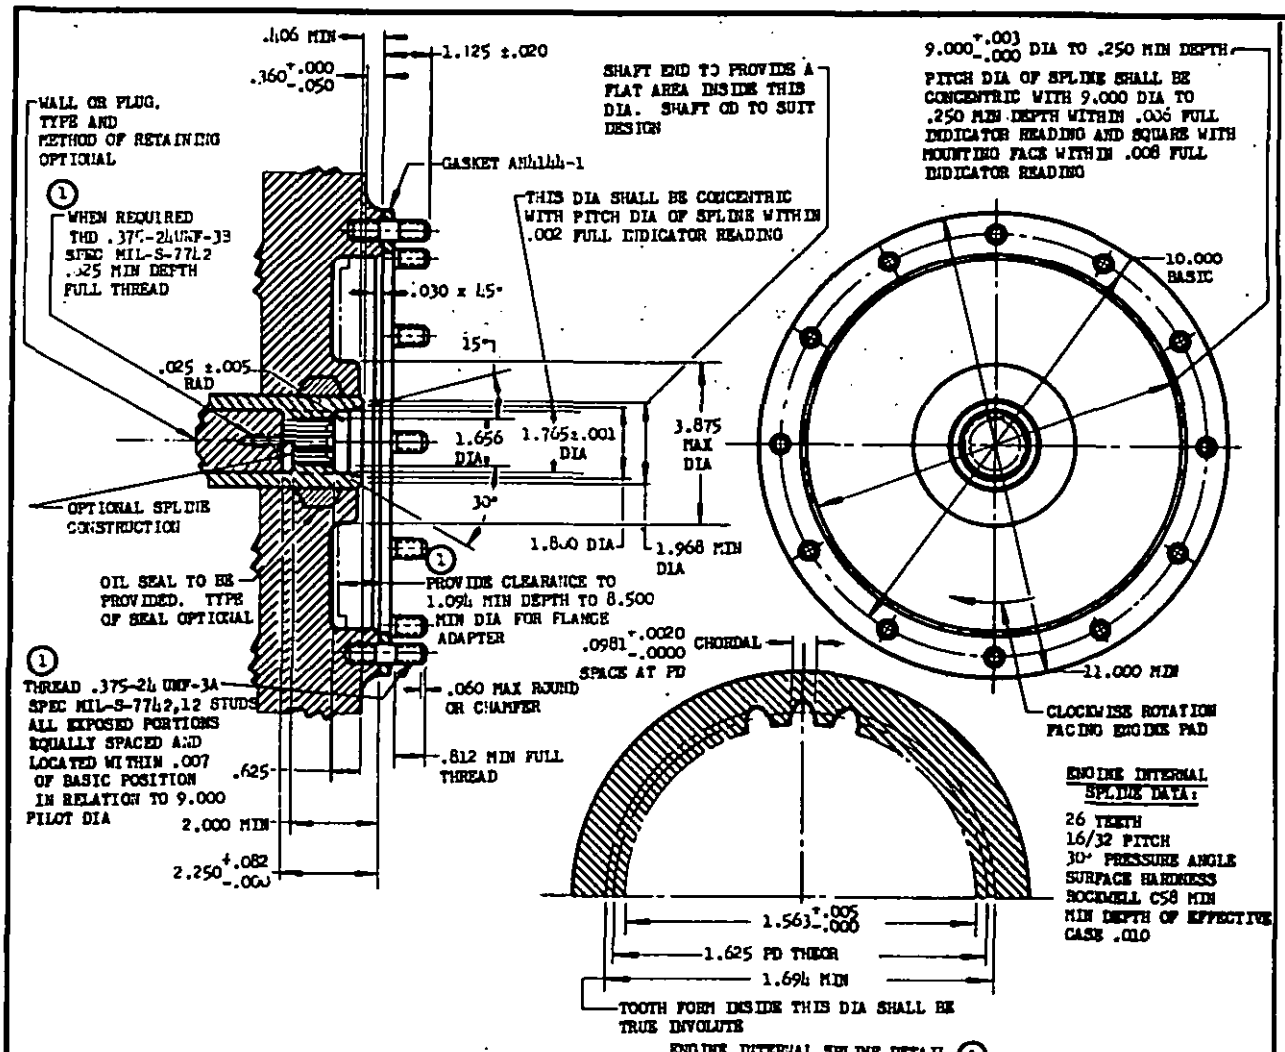


ENGINE INTERNAL SPLINE DETAIL (1)

SPEED, STRENGTH, ACCESSORY DATA AND USE

TYPE	TORQUE LB - IN. T_c	TORQUE LB - IN. T_o	TORQUE LB - IN. T_s	S SPEED RPM	ACCESSORY WT LB MAX	OVERHUNG MOMENT LB - IN. MAX	ACCESSORY CLEARANCE AND NOMINAL USE	TYPE OF ENGINE
XVII-C	4200	6300	18500	7500 - 8250	150	1250	AND10343 FOR GENERATOR	RECIPROCATING
XVII-D	4200	6300	18500	7500 - 8250	225	2500		
XVII-E	4200	6300	18500	(a) 6000	150	1250	(b) FOR POWER TAKE-OFF	TURBOJET AND TURBOPROP
XVII-F	4200	6300	18500	(a) 6000	225	2500		

(a) 7400 - 000 RPM WHEN THE ENGINE IS OPERATING AT 75% NORMAL SEA LEVEL STATIC OUTPUT.

FLANGE ADAPTER IN ACCORDANCE WITH AN6139-1A FOR CONVERTING TO TYPES XVII-A AND-B AND AN6139-1A WITH SPLINE ADAPTER IN ACCORDANCE WITH AN6182-1 FOR CONVERTING TO A TYPE XII DRIVE SHALL BE FURNISHED WHEN SPECIFIED IN THE ENGINE MODEL SPECIFICATION.

THE OIL LEAKAGE OUT OF THIS DRIVE SHALL NOT EXCEED 2 CC PER HOUR. PROVISION FOR SPLINE LUBRICATION SHALL BE PROVIDED. IF THE FORM IS FLUID, ACCESSIBLE PROVISION SHALL BE MADE TO PREVENT FLOW IN THE EVENT FLOW IS NOT DESIRED.

(1) SPEED: "S" DRIVE SHAFT SPEED SHALL BE AT NORMAL RATED SPEED UNLESS OTHERWISE NOTED.

PAD OUTLINE AS DIMENSIONED IS A BASIC MINIMUM AREA REQUIREMENT.

STRENGTH: TO BE CAPABLE OF DRIVING CONTINUOUS TORQUE LOAD (T_c) AT ANY ENGINE SPEED. THE DRIVE SHALL WITHSTAND THE STATIC TORQUE (T_s) WITHOUT FAILURE OR PERMANENT DEFORMATION. IN ADDITION, THE DRIVE SHALL BE ADEQUATE FOR FIVE (5) MINUTE PERIODS OF TORQUE OVERLOAD (T_o) OPERATION, WHICH OVERLOAD PERIODS SHALL BE CONSIDERED AS RECURRING AT FOUR (4) HOUR INTERVALS.

REMOVE ALL BURRS AND SHARP EDGES.

(1) DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.

(1) THIS DRAWING AND THE APPLICABLE ENGINE SPECIFICATIONS, TOGETHER, COMPLETELY DEFINE THE DESIGN REQUIREMENTS.

(1) (b) ACCESSORY CLEARANCE SHALL BE PROVIDED IN ACCORDANCE WITH MANUFACTURER'S MODEL SPECIFICATION.

APPROVED 15 MAR 53 ① REVISED 1 MAY 53

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all conventional standard drawings for the same product and shall become effective for the procurement of conventional supplies, or the use in new design, not later than 6 months after the latest date of approval shown.


AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD	AND20007
DRIVE — TYPE XVII ENGINE ACCESSORY	SHEET 2 OF 2 SHEETS

NOT A PART NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:30Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all inconsistent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval above.

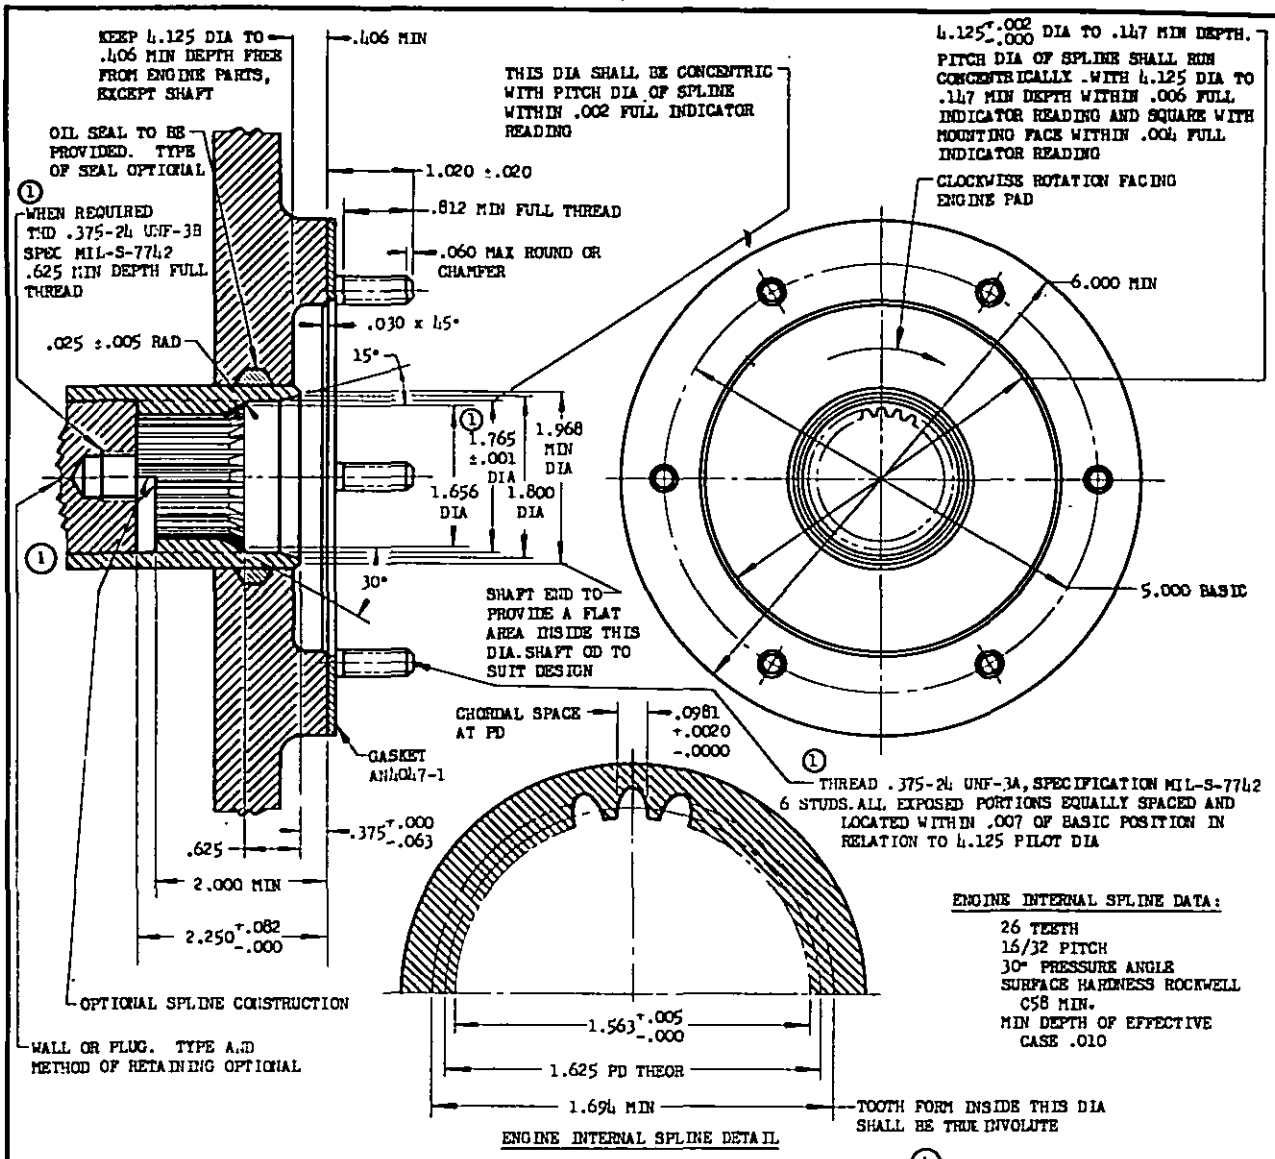

1

SPEED, STRENGTH, ACCESSORY DATA AND USE								
TYPE	TORQUE LB - IN.			"S" SPEED RPM	ACCESSORY WT LB MAX	OVERHUNG MOMENT LB - IN MAX	ACCESSORY AND NOMINAL CLEARANCE USE	TYPE OF ENGINE
	T_c	T_o	T_s					
XVII-A	4200	6300	18500	7500 - 8250	65	400	AND10305 FOR GENERATOR	RECIPROCATING
XVII-B	4200	6300	18500	(a) 6000	75	625	(b) FOR POWER TAKEOFF	TURBO - JET AND TURBO - PROP

(a) 7400 - 000 RPM WHEN THE ENGINE IS OPERATING AT 75% NORMAL SEA LEVEL STATIC OUTPUT.

SPLINE ADAPTER IN ACCORDANCE WITH AN4182-1 SHALL BE FURNISHED FOR CONVERTING TO A TYPE XII DRIVE WHEN SPECIFIED IN THE ENGINE MODEL SPECIFICATION.

THE OIL LEAKAGE OUT OF THIS DRIVE SHALL NOT EXCEED 2 CC PER HOUR. PROVISION FOR SPLINE LUBRICATION SHALL BE PROVIDED. IF THE FORM IS FLUID, ACCESSIBLE PROVISION SHALL BE MADE TO PREVENT FLOW IN THE EVENT FLOW IS NOT DESIRED.

1 SPEED: "S" DRIVE SHAFT SPEED SHALL BE AT NORMAL RATED ENGINE SPEED UNLESS OTHERWISE NOTED.

PAD OUTLINE AS DIMENSIONED IS A BASIC MINIMUM AREA REQUIREMENT.

STRENGTH: TO BE CAPABLE OF DRIVING CONTINUOUS TORQUE LOAD (T_c) AT ANY ENGINE SPEED. THE DRIVE SHALL WITHSTAND THE STATIC TORQUE (T_s) WITHOUT FAILURE OR PERMANENT DEFORMATION. IN ADDITION, THE DRIVES SHALL BE ADEQUATE FOR FIVE (5) MINUTE PERIODS OF TORQUE OVERLOAD (T_o) OPERATION, WHICH OVERLOAD PERIODS SHALL BE CONSIDERED AS RECURRING AT FOUR (4) HOUR INTERVALS.

REMOVE ALL BURRS AND SHARP EDGES.

1 DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.

1 THIS DRAWING AND APPLICABLE ENGINE SPECIFICATIONS, TOGETHER, COMPLETELY DEFINE THE DESIGN REQUIREMENTS.

1 (b) ACCESSORY CLEARANCE SHALL BE PROVIDED IN ACCORDANCE WITH MANUFACTURERS MODEL SPECIFICATION.

APPROVED 25 Jul 49. REVISED 1 4 Mar 53

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

DRIVE — TYPE XVII ENGINE ACCESSORY

AND20007

SHEET 1 OF 2

NOT A PART NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:30Z
Check the source to verify that this is the current version before use.