INCH-POUND
MIL-PRF-11767G(AT)
12 December 1997
SUPERSEDING
MIL-R-11767F(AT)
4 June 1991

PERFORMANCE SPECIFICATION

RELAY ASSEMBLY: GUN-FIRING, WATERPROOF, 24 VOLT DC

This specification is approved for use by the U.S. Army Tank-automotive and Armaments Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of waterproof gun-firing relay assembly with a nominal rating of 24 volts (V) direct current (dc) for use in the main gun and machine gun circuits of military combat vehicles. The assembly consists of relays which control the firing of the main gun by the operation of a time delay circuit and a separate fast-operating, fast-release relay which controls the firing of the machine gun (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirement documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

AMSC N/A FSC 5945

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:58Z
Check the source to verify that this is the current version before use.

2.2 Government documents.

2.2.1 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWING

8338636 - Relay Assembly, Gun Firing (Interface).

(Copies of this drawing are available from the U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

3.2 Design, materials, and manufacturing process. Unless otherwise specified (see 6.2), the design, materials, and manufacturing process selection is the prerogative of the contractor as long as all articles submitted to the government fully meet the interface and interoperability, environmental, support and ownership, and operating requirements specified herein.

3.2.1 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.3 Interface and interoperability requirements. The relay assembly shall conform to the envelope dimensions, and the electrical and mounting interfaces as shown in Drawing 8338636.

3.3.1 Grounding. The finish around the mounting holes shall provide positive electrical contact to ground when the assembly is normally mounted. This requirement does not apply to relay assemblies mounted on insulated bases.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:58Z
Check the source to verify that this is the current version before use.

3.3.2 Weight. The maximum weight of the relay assembly shall be four pounds (lb).

3.3.3 Mounting bracket. When brackets are used, they shall be an integral part of the housing or shall be securely attached thereto, in a manner to prevent any movement between assembly and the mounting bracket in service.

3.3.4 Polarity. The relay assembly shall operate in a circuit having the negative battery terminal grounded.

3.4 Environmental requirements. The design, materials, and construction of relay assembly shall enable the unit to operate in the following environmental conditions. The relay assembly shall subsequently meet the requirements specified in 3.6.1, 3.6.4, 3.6.5, 3.6.7, and 3.6.8.

3.4.1 Vibration. The relay assembly shall evidence no mechanical or electrical malfunction (opening or closing of relay contacts).

3.4.2 Shock. The relay assembly shall evidence no mechanical or electrical malfunction (opening or closing of relay contacts).

3.4.3 Corrosion. Metals shall be of a corrosion-resistant type or shall be treated to resist corrosion. The relay shall evidence no corrosion.

3.4.4 Waterproofness. The relay assembly shall be waterproof.

3.5 Support and ownership requirements.

3.5.1 Materials. The relay assembly shall not produce any hazards to personnel or the environment resulting from the use of asbestos or cadmium.

3.5.1.1. Dissimilar metals. Except where necessary to complete an electrical circuit, there shall be no contact between dissimilar metals, which would encourage galvanic action.

3.5.2 Springs. Springs shall not be used to transmit current.

3.5.3 Endurance. The relay assembly shall remain mechanically and electrically operative and the voltage drop across the main gun and machine gun relay contacts carrying rated current, shall not exceed the limits specified in 3.6.7. The relay assembly shall subsequently meet the requirements of 3.6.1 and 3.6.4 through 3.6.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:58Z
Check the source to verify that this is the current version before use.

3.5.4 Color. Exterior surfaces of the relay assembly housing shall be white.

3.5.5 Identification marking. Identification marking shall be permanent and legible and, as a minimum, shall include the following:

a. "Relay assembly: gun-firing"
b. "24 Vdc waterproof"
c. Military Part Number (P/N) (see 6.2)
d. Manufacturer's name
e. Manufacturer's serial number (if applicable)
f. Date of manufacture (month, year)

3.6 Operating requirements.

3.6.1 Time delay. The relay shall provide a time delay (time the main gun-firing relay contacts are closed) between 0.10 and 0.50 seconds throughout the operating voltage range of 18 to 30 Vdc. The relay assembly shall subsequently meet the requirements specified in 3.5.3 and 3.6.2 through 3.6.8.

3.6.2 Operating current. When the main gun relay is energized, the operating current shall not be more than 0.35 amperes (A).

3.6.3 Dielectric strength. The relay assembly shall evidence no loosening, cracking, burning, smoking, rupturing or any other damage to the insulation. It shall subsequently meet the requirements of 3.6.1, 3.6.4, 3.6.5, and 3.6.7.

3.6.4 Pick-up voltage. The pick-up voltage of the machine gun relay shall not exceed 18 Vdc when tested for ten cycles (deenergize and energize).

3.6.5 Drop-out voltage. The drop-out voltage of the machine gun relay shall be between 1.5 and 8 Vdc.

3.6.6 Coil current. The coil current of the machine gun relay shall be not more than 0.35 A.

3.6.7 Contact voltage drop. Unless otherwise specified (see 6.2), the voltage drop across external terminals of the main gun and machine gun relay assemblies, shall not exceed individual reading of 175 millivolts (mV) or an average of 150 mV before cycling and individual reading of not more than 200 mV or an average of 175 mV after cycling tests.

3.6.8 Extreme temperature operation. Extreme temperatures shall not be detrimental to the performance of the relay assembly. The relay assembly shall meet the requirements of 3.6.1 at extreme temperatures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:58Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Conformance inspections (see 4.4).
c. Control tests (see 4.5).

4.2 Inspection conditions. Unless otherwise specified (see 6.2), all inspections shall be conducted under the following conditions:

a. Air temperature: 77 ± 15 degrees Fahrenheit (°F).
b. Barometric pressure: 28.5 (+ 2, - 3) inches of mercury.
c. Relative humidity: 50 ± 30 percent (%).

4.3 First article inspection. Unless otherwise specified (see 6.2), five relay assemblies shall be utilized for first article testing (see table I). The relay assemblies shall be representative of the units proposed to be furnished under the contract. First article inspection shall be done in the order specified in table II.

Table I. Verification methods.

Title	Requirement	Verification	Title	Requirement	Verification
Interface	3.3	4.7	Endurance	3.5.2	4.9.1
Grounding	3.3.1	4.7	Color	3.5.3	4.9
Weight	3.3.2	4.7	Marking	3.5.4	4.9
Mounting bracket	3.3.3	4.7	**Operating**	3.6	4.10
Polarity	3.3.4	4.7	Time delay	3.6.1	4.10.1
Environmental	3.4	4.8	Operating current	3.6.2	4.10.2
Vibration	3.4.1	4.8.1	Dielectric strength	3.6.3	4.10.3
Shock	3.4.2	4.8.2	Pick-up voltage	3.6.4	4.10.4
Corrosion	3.4.3	4.8.3	Drop-out voltage	3.6.5	4.10.5
Waterproofness	3.4.4	4.8.4	Coil current	3.6.6	4.10.6
Support and ownership	3.5	4.9	Contact voltage drop	3.6.7	4.10.7
Springs	3.5.1	4.9	Extreme temperature	3.6.8	4.10.8

4.4 Conformance inspections. Conformance inspection shall include the applicable tests of table I, as specified in the contract (see 6.2).

4.5 Control tests. When specified (see 6.2), control testing shall include the applicable tests of table I, as specified in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:58Z
Check the source to verify that this is the current version before use.

TABLE II. Order of first article test.

Title	Requirement	Test
Sample 1		
Interface	3.3-3.3.4	4.7
Support and ownership	3.5.1-3.5.2, 3.5.4, 3.5.5	4.9
Extreme temperature operation	3.6.8	4.10.8
Pick-up voltage	3.6.4	4.10.4
Drop-out voltage	3.6.5	4.10.5
Contact voltage drop	3.6.7	4.10.7
Vibration	3.4.1	4.8.1
Time delay	3.6.1	4.10.1
Pick-up voltage	3.6.4	4.10.4
Drop-out voltage	3.6.5	4.10.5
Contact voltage drop	3.6.7	4.10.7
Shock	3.4.2	4.8.2
Time delay	3.6.1	4.10.1
Pick-up voltage	3.6.4	4.10.4
Drop-out voltage	3.6.5	4.10.5
Contact voltage drop	3.6.7	4.10.7
Sample 2		
Interface	3.3-3.3.4	4.7
Support and ownership	3.5.1-3.5.2, 3.5.4, 3.5.5	4.9
Time delay	3.6.1	4.10.1
Pick-up voltage	3.6.4	4.10.4
Drop-out voltage	3.6.5	4.10.5
Contact voltage drop	3.6.7	4.10.7
Vibration	3.4.1	4.8.1
Time delay	3.6.1	4.10.1
Pick-up voltage	3.6.4	4.10.4
Drop-out voltage	3.6.5	4.10.5
Contact voltage drop	3.6.7	4.10.7
Waterproofness	3.4.4	4.8.4
Dielectric strength	3.6.3	4.10.3
Time delay	3.6.1	4.10.1
Pick-up voltage	3.6.4	4.10.4
Drop-out voltage	3.6.5	4.10.5
Contact voltage drop	3.6.7	4.10.7

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:58Z
Check the source to verify that this is the current version before use.

TABLE II. Order of first article test - Continued.

Title	Requirement	Test
Sample 3		
Interface	3.3-3.3.4	4.7
Support and ownership	3.5.1-3.5.2, 3.5.4, 3.5.5	4.9
Time delay	3.6.1	4.10.1
Pick-up voltage	3.6.4	4.10.4
Drop-out voltage	3.6.5	4.10.5
Contact voltage drop	3.6.7	4.10.7
Operating current	3.6.2	4.10.2
Coil current	3.6.6	4.10.6
Time delay	3.6.1	4.10.1
Pick-up voltage	3.6.4	4.10.4
Drop-out voltage	3.6.5	4.10.5
Contact voltage drop	3.6.7	4.10.7
Sample 4		
Interface	3.3-3.3.4	4.7
Support and ownership	3.5.1-3.5.2, 3.5.4, 3.5.5	4.9
Time delay	3.6.1	4.10.1
Pick-up voltage	3.6.4	4.10.4
Drop-out voltage	3.6.5	4.10.5
Contact voltage drop	3.6.7	4.10.7
Endurance test	3.5.3	4.9.1
Time delay	3.6.1	4.10.1
Pick-up voltage	3.6.4	4.10.4
Drop-out voltage	3.6.5	4.10.5
Contact voltage drop	3.6.7	4.10.7

4.6 Verification methods. The types of verification methods included in this section are visual inspection, measurement, sample tests, full-scale demonstration tests, simulation, modeling, engineering evaluation, component properties analysis, and similarity to previously-approved or previously-qualified designs.

4.6.1 Verification alternatives. The manufacturer may propose alternative test methods, techniques, or equipment, including the application of statistical process control, tool control, or cost-effective sampling procedures, to verify performance.

4.7 Interface and interoperability verification. Conformance to 3.3 through 3.3.4 shall be determined using appropriate verification methods from 4.6 or 4.6.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:58Z
Check the source to verify that this is the current version before use.

4.8 Environmental verification. After each of the following environmental tests, the relay assembly shall be subjected to the tests specified in 4.10.1, 4.10.4, 4.10.5, and 4.10.7, except for control tests which shall be conducted only at a temperature of 77 ± 15°F.

4.8.1 Vibration. To determine conformance to 3.4.1, the relay assembly (rigidly mounted without brackets or shock absorbers) shall be subjected to a simple harmonic motion having an amplitude of 0.03 inch (in.) (0.06 in. maximum total incursion), the frequency being varied uniformly between the approximate limits of 10 to 55 Hertz (Hz). The entire frequency range, from 10 to 55 Hz, shall be traversed in approximately one minute. This motion shall be applied for a period of one hour along each of three mutually perpendicular directions. Pins E and G of the machine gun relay coil shall be connected to 28.5 Vdc power source for half of the time. To determine electrical malfunction of the relay assembly, contact opening or closing shall be monitored between pins A and D of relay assembly.

4.8.2 Shock. To determine conformance to 3.4.2, the relay assembly (rigidly mounted without brackets or shock absorbers) shall be exposed to a half-sine wave shock impulse of 25 ± 3 gravity units for 6 to 9 milliseconds (ms) duration (see figure 1). The shock impulse shall be applied along three mutually perpendicular axes. This test shall be conducted once in energized position and once in deenergized position of the relay assembly. When the relay is tested in the energized position, the maximum contact opening duration shall not exceed 2 ms.

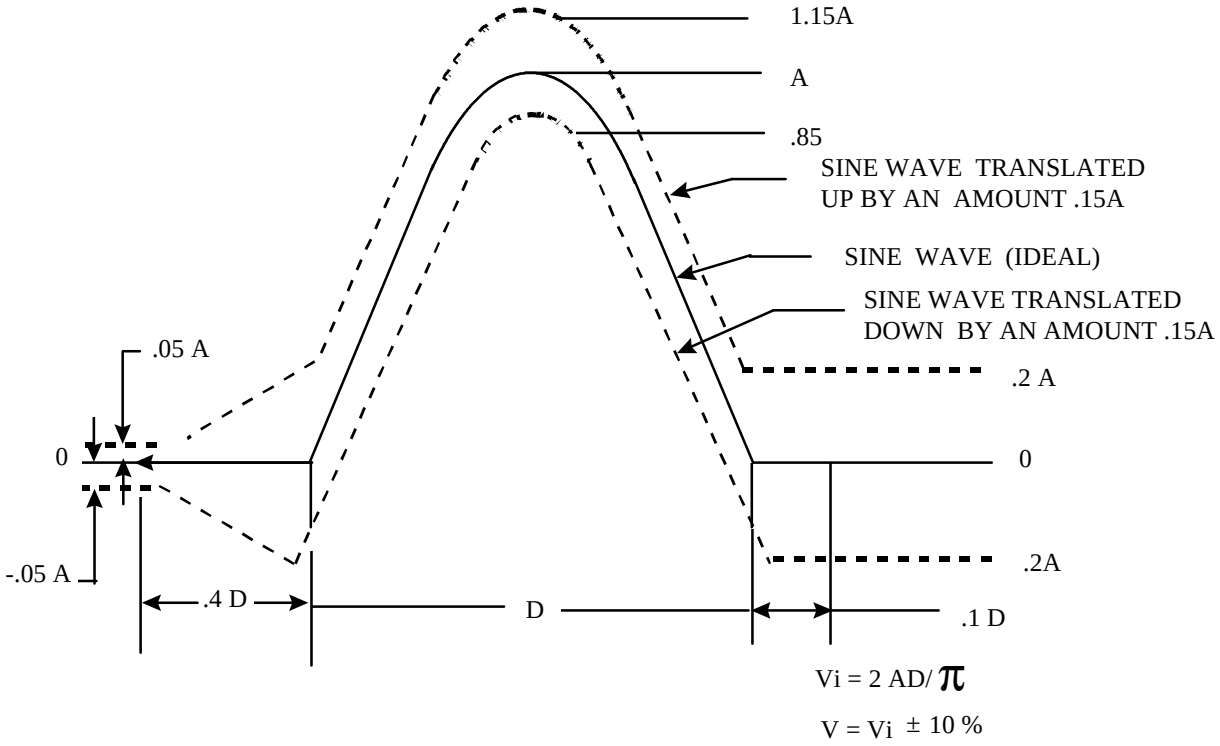


FIGURE 1. Tolerances for half-sine shock pulse.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:58Z
Check the source to verify that this is the current version before use.

NOTE: The oscillogram should include a time about 3D long with the pulse located approximately in the center. The integration to determine velocity change should extend from 0.4D before the pulse to 0.1D beyond the pulse. The acceleration amplitude of the ideal half-sine pulse is A and its duration is D. Any measured acceleration pulse which can be contained between the broken line boundaries is a nominal half-sine pulse of nominal amplitude A and nominal duration D. The velocity-change associated with the measured acceleration pulse is V.

FIGURE 1. Tolerances for half-sine shock pulse - Continued.

4.8.3 Corrosion. To determine conformance to 3.4.3, the relay assembly shall evidence no corrosion during or after 200 hours of exposure to a 5% saline solution sprayed in a finely divided, wet dense fog. The test shall be conducted with a temperature in the exposure zone maintained at 95 + 2, - 3°F.

4.8.4 Waterproofness. To determine conformance to 3.4.4, the relay assembly shall be tested as follows:

a. A relay assembly, with its electrical connections, shall be submerged in a container containing a saline solution consisting of 5% salt and 95% water and placed in a vacuum chamber. The salt shall be sodium chloride containing on a dry basis not more than 0.1% sodium iodine and not more than 0.2% total impurities. The water shall be distilled water or other water containing not more than 200 parts per million of total solids. The uppermost surface of the submerged relay assembly shall be a minimum of 1 in. below the surface of the saline solution. The chamber shall then be evacuated to a pressure of 6 lb below atmospheric so as to apply a minimum of 6 pounds per square inch (psi) internal pressure to all voids within the relay assembly. The relay assembly shall be operated for 30 minutes at full rated current and voltage while submerged and pressurized. During the entire operation, the relay assembly shall be observed for poor seals, as evidenced by bubbles escaping from its interior. Leakage thus indicated shall be considered as noncompliance with the waterproofness requirement and the relay assembly shall be rejected. Bubbles which are the result of entrapped air on the exterior surfaces of the relay assembly shall not be considered a leak.
b. The chamber shall then be pressurized to 6 lb above atmospheric and the relay assembly again operated for 30 minutes. Test results obtained shall be compared with the data from step a.

4.9 Support and ownership verification. Conformance to 3.5.1 through 3.5.2, 3.5.4, and 3.5.5 shall be determined using appropriate verification methods from 4.6 or 4.6.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:58Z
Check the source to verify that this is the current version before use.

4.9.1 Endurance.

4.9.1.1 Main gun relay. To determine conformance to 3.5.3, the main gun relay assembly shall be subjected to 50 000 cycles of operation at 24 Vdc. Cycling shall consist of making and breaking a 45 A dc load in an inductive circuit with the time constant ratio L/R (time required for the current to reach 63.2% of its steady state value) not less than 0.026 second. On time shall be 0.3 ± 0.2 second. Off time shall be 5.7 ± 0.2 seconds. The 50 000 cycles of operation shall be conducted at the following temperatures:

Number of cycles	Temperatures
20 000	77 ± 15°F
15 000	-65 ± 5°F
15 000	160 ± 5°F

The relay assembly shall then be subjected to the tests specified in 4.10.1 and 4.10.7.

4.9.1.2 Machine gun relay. To determine conformance to 3.5.3, the machine gun relay shall be subjected to the test specified in 4.9.1.1, except that the following values shall be substituted. Cycling shall consist of making and breaking a 20 A dc inductive load. On time shall be 4 ± 0.1 seconds. Off time shall be 8 ± 0.1 seconds. The machine gun relay shall then be subjected to the test specified in 4.10.4 through 4.10.7.

4.10 Operating verification.

4.10.1 Time delay. To determine conformance to 3.6.1, the relay assembly shall be subjected to test potentials of 18, 24, and 30 Vdc. The time delay shall be measured with an oscilloscope or other time interval measuring equipment, accurate to within three percent. These tests shall be repeated with the relay assembly mounted in the direction of each of its three major axes.

4.10.2 Operating current. To determine conformance to 3.6.2, the following procedure shall be followed:

a. Connect 29 + 0.0, - 0.5 Vdc between pins B and G of the relay assembly.
b. Energize main gun relay by applying 29 Vdc between pins C and G of the relay assembly.
c. Determine the coil current.

4.10.3 Dielectric strength. To determine conformance to 3.6.3, relay assembly shall be subjected to a voltage of 500 V root mean square (rms) at a frequency of 60 Hz from a voltage source of a minimum rating of 0.5 kilovolt-amperes (kV-A). The voltage shall be applied as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:58Z
Check the source to verify that this is the current version before use.

a. Between the winding terminals and the housing. If necessary winding internal grounds could be disconnected.
b. Between the terminals of the relay assembly that are connected to the contact points, and the relay housing.

The test potential shall be applied and reduced at a maximum rate of change of 250 V per second. Duration of application of the test voltage shall be one minute for each winding and for the circuit breaking, mechanisms. During this, time the relay assembly shall be observed for evidence of short circuit or insulation break down. The relay assembly shall subsequently be subjected to the tests specified in 4.10.1, 4.10.4, 4.10.5, and 4.10.7

NOTE: Dielectric strength test could be conducted prior to final assembly of relay assembly.

NOTE: Before high voltage is impressed upon any winding, terminal or other part of the relay assembly, the construction should be carefully examined and the manufacturer's internal circuit diagram for the device checked to determine where windings and other parts are grounded. The appropriate low voltage circuit ground and circuit continuity test should be made to assure that high voltage may not, through some unintended circuit, cause serious damage, instead of determining insulation effectiveness.

4.10.4 Pick-up voltage. To determine conformance to 3.6.4, after the machine gun relay has been temperature stabilized for 24 hours, it shall then be tested for 10 cycles (deenergize and energize) to determine that the energized function is completed when a potential not in excess of the pick-up voltage as specified in 3.6.4 is applied. A suitable indicating device shall be used to determine that the contacts operate satisfactorily. Upon completion of this test, the test shall be repeated at ambient air temperatures of -65 $\pm$ 5°F, and +160 $\pm$ 5°F.

4.10.5 Drop-out voltage. To determine conformance to 3.6.5, after the machine gun relay has been stabilized, it shall then be energized with 28 Vdc. The voltage shall then be reduced. The relay shall release to the deenergized position within the specified limits of drop-out voltage as specified in 3.6.5. Repeat for 10 cycles. A suitable device shall be used to determine that the contacts operate satisfactorily. Upon completion of this test, the test shall be repeated at temperature of -65 $\pm$ 5°F, and +160 $\pm$ 5°F.

4.10.6 Coil current. To determine conformance to 3.6.6, the machine gun relay shall be temperature stabilized. A voltage of 29 + 0.0, - 0.50 Vdc shall be applied between pins E and G of the relay assembly, and the current flow determined within 10 seconds after application of coil voltage.

4.10.7 Contact voltage drop. To determine conformance to 3.6.7, an average of 10 consecutive and individual readings shall be within the limits as specified in 3.6.7. Contacts shall be caused to break and then to make the test current before each measurement. The machine

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:58Z
Check the source to verify that this is the current version before use.

gun relay shall be subjected to a 20 A dc resistive load across the contacts and 28 Vdc on the coil. The main gun relay shall be subjected to a 45 A dc resistive load across the contacts and 28 Vdc on the coil. The voltage drop shall be measured within 0.05 seconds after contacts close.

4.10.8 Extreme temperature operation. To determine conformance to 3.6.8, the test specified in 4.10.1 shall be repeated at temperatures of -65 ± 5°F and +160 ± 5°F. Prior to testing at each temperature, the relay assemblies shall be subjected to that temperature for 24 hours.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.)

6.1 Intended use. The gun firing relay assembly covered by this specification is intended for the protection of the gun firing solenoid on military combat vehicles from burn-out, by preventing the solenoid from remaining continuously energized.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. When first article is required (see 3.1 and 6.3).
c. Design, materials, and manufacturing processes, if other than specified (see 3.2).
d. Part number (see 3.5.5).
e. Maximum contact voltage drop, if other than specified (see 3.6.7).
f. Inspection conditions, if other than specified (see 4.2).
g. If first article test samples are other than specified (see 4.3).
h. Conformance tests to be performed, number of samples, sequence of tests, and frequency of sampling (see 4.4 and 6.4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:58Z
Check the source to verify that this is the current version before use.

i. If control tests are to be performed, tests to be performed, number of samples, sequence of tests, and frequency of sampling (see 4.5).
j. Packaging requirements (see 5.1).

6.3 First article. When requiring a first article inspection, contracting documents should provide specific guidance to offerors. This guidance should cover whether the first article is a first article sample, a first production item, or the number of test items. These documents should also include specified instructions regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Pre-solicitation documents should provide Government waiver rights for samples for first article inspection to bidders offering a previously acquired or tested product. Bidders offering such products who wish to rely on such production testing must furnish evidence with the bid that prior Government approval is appropriate for the pending contract.

6.4 Conformance inspection. Affordable conformance inspection with confidence varies depending upon a number of procurement risk factors. Some of these factors include: Contractor past performance, government schedules and budget, product material and design maturity, manufacturing capital equipment and processes applied, the controlled uniformity of those processes, labor skill and training, and the uniformity of measuring processes and techniques. During the solicitation, contracting documents should indicate those tests desired from table I and their designated frequency based on a risk assessment for the procurement.

6.5 Subject term (key word) listing.

Contacts
Machine gun
Solenoid
Time delay

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - AT

Preparing Activity:
Army - AT

(Project 5945-A793)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE *(YYMMDD)*
	MIL-PRF-11767G(AT)	971212

3. DOCUMENT TITLE

RELAY ASSEMBLY: GUN-FIRING, WATERPROOF, 24 VOLT DC

4. NATURE OF CHANGE ***(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)***

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE *(Include Area Code)*
	(1) Commercial (810) 574-8745 (2) AUTOVON 786-8745
c. ADDRESS *(Include Zip Code)* Commander U.S. Army Tank-automotive and Armaments Command ATTN: AMSTA-TR-E/BLUE Warren, MI 48397-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403 Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:58Z
Check the source to verify that this is the current version before use.