MIL-R-11804E
1 February 1965
SUPERSEDING
MIL-R-11804D
27 September 1961

MILITARY SPECIFICATION

RESISTORS, FIXED, FILM (POWER TYPE),

GENERAL SPECIFICATION FOR


This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the general requirements for power-type, film, fixed resistors capable of withstanding high relative humidity, continuous operation at rated wattage, and high hotspot temperatures. These resistors have resistance tolerances of ±2.0 and ±5.0 percent and a resistance range of 10.0 ohms to 4.22 megohms inclusive (see 3.1).

1.2 Classification.

1.2.1 Type designation. The type designation shall be in the following form, and as specified (see 3.1 and 6.1):

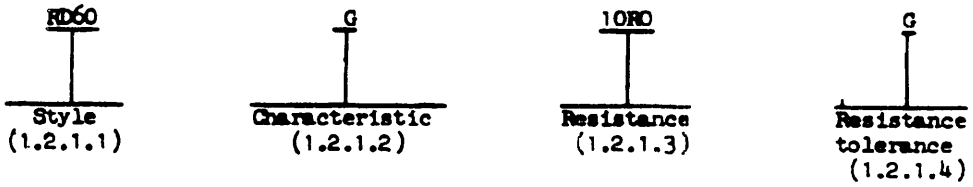

1.2.1.1 Style. The style is identified by the two-letter symbol "RD" followed by a two-digit number; the letters identify power-type, film, fixed resistors and the number identifies the size and power rating of the resistor.

1.2.1.2 Characteristic. The characteristic designation is a one-letter symbol which identifies the maximum continuous operating temperature in accordance with table I.

FSC 5905

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

Table I. Characteristic.

Symbol	Maximum continuous operating temperature
	°C
P.....	235
G[1].....	275

[1] Available in axial-wire lead styles only

1.2.1.3 Resistance. The nominal resistance expressed in ohms is identified by a four-digit number; the first three digits represent significant figures and the last digit specifies the number of zeros to follow. When the value of resistance is less than 100 ohms, or when fractional values of an ohm are required, the letter "R" shall be substituted for one of the significant digits to represent the decimal point. When the letter "R" is used, succeeding digits of the group represent significant figures. The resistance-value designations are shown in table II. Minimum and maximum resistance values shall be as specified (see 3.1). The standard values for every decade shall follow the sequence shown for the 10 to 100 decade in table III.

Table II. Designation of resistance values.

Designation	Resistance		
	Ohms		
10R0 to 95R3, incl.....	10 to	95.3	incl
1000 to 9530, incl.....	100 to	953.	incl
1001 to 9531, incl.....	1,000 to	9,530.	incl
1002 to 9532, incl.....	10,000 to	95,300.	incl
1003 to 9533, incl.....	0.10 to	.953	megohms incl
1004 to 4224, incl.....	1.00 to	4.22	megohms incl

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

Table III. Standard resistance values for the 10 to 100 decade.

G (±2%)	J (±5%)	G (±2%)	J (±5%)	G (±2%)	J (±5%)
10.0	10.0	21.5	21.5	46.4	46.4
10.5	---	22.6	---	48.7	---
11.0	11.0	23.7	23.7	51.1	51.1
11.5	---	24.9	---	53.6	---
12.1	12.1	26.1	26.1	56.2	56.2
12.7	---	27.4	---	59.0	---
13.3	13.3	28.7	28.7	61.9	61.9
14.0	---	30.1	---	64.9	---
14.7	14.7	31.6	31.6	68.1	68.1
15.4	---	33.2	---	71.5	---
16.2	16.2	34.8	34.8	75.0	75.0
16.9	---	36.5	---	78.7	---
17.8	17.8	38.3	38.3	82.5	82.5
18.7	---	40.2	---	86.6	---
19.6	19.6	42.2	42.2	90.9	90.9
20.5	---	44.2	---	95.3	---

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:59Z
Check the source to verify that this is the current version before use.

1.2.1.4 Resistance tolerance. The resistance tolerance is identified by a single letter in accordance with table IV.

Table IV. Resistance tolerance.

Symbol	Resistance tolerance
	Percent
G.....	±2.0
J.....	±5.0

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-S-571 - Solder; Tin Alloy, Lead Tin Alloy; and Lead Alloy.

PPP-B-566 - Boxes, Folding, Paperboard.

PPP-B-636 - Box, Fiberboard.

PPP-B-676 - Boxes, Set-Up, Paperboard.

PPP-T-60 - Tape, Pressure Sensitive Adhesive, Waterproof - For Packaging and Sealing.

MILITARY

MIL-P-116 - Preservation, Methods of.

MIL-B-117 - Bags, Interior Packaging.

MIL-R-11804/1 - Resistors, Fixed, Film (Power Type), Styles RD31, RD33, RD35, RD37, and RD39.

MIL-R-11804/2 - Resistors, Fixed, Film (Power Type), Styles RD60, RD65, and RD70.

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:59Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129 - Marking for Shipment and Storage.

MIL-STD-130 - Identification Marking of U. S. Military Property.

MIL-STD-202 - Test Methods for Electronic and Electrical Component Parts.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Detail specifications. The individual part requirements shall be as specified herein and in accordance with the applicable detail specifications (see 3.1 and 6.1).

3.2 Qualification. Resistors furnished under this specification shall be aproducts which have been tested, and have passed the qualification tests specified in 4.4, and have been listed on or approved for listing on the applicable qualified products list (see 6.2).

3.3 Material. The material shall be as specified herein. When a definite material is not specified, a material shall be used which will enable the resistors to meet the performance requirements of this specification. Acceptance or approval of any constituent material shall not be construed as a guaranty of the acceptance of the finished product.

3.4 Design and construction. Resistors shall be of the design, construction, and physical dimensions specified (see 3.1). Each resistor shall consist of a film-type resistance element protected against exposure to humidity by a coating or enclosure of moisture-resistance insulating material (see 3.4.3).

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:59Z
Check the source to verify that this is the currentversion before use.

3.4.1 Terminals. Terminals shall be of corrosion-resistant material and shall be securely connected, mechanically and electrically, to the resistance element. All terminals shall be suitably treated to facilitate soldering.

3.4.1.1 Tab-terminal resistors. All tabs shall be radially straight and within 10 degrees of a plane passing through one of the terminals and the longitudinal axis of the resistor.

3.4.2 Soft solder. Where soft solder is used, it shall conform to composition Sn50 of QQ-S-571.

3.4.3 Protective coating or enclosure. The resistance element of resistors shall be protected by a coating or enclosure which shall completely cover the element. The protective coating shall be such as to minimize leakage paths between the terminals, resulting from the collection of moisture film on the exterior surface of the resistor. The protective coating shall be free from holes, fissures, chips, and other faults detrimental to the performance of the resistor.

3.5 Voltage rating. Resistors shall have a rated direct-current (dc) continuous working voltage or an approximate sine-wave root-mean-square (rms) continuous working voltage at commercial-line frequency corresponding to the power rating, as determined from the following formula:

$$E = \sqrt{PR}$$

Where: E = Rated dc or rms continuous working voltage

P = Power rating (see 3.1)

R = Nominal resistance of resistor

The maximum continuous working voltage shall be as specified (see 3.1).

3.6 DC resistance. When resistors are tested as specified in 4.6.2, the dc resistance shall be within the specified tolerance of the nominal resistance (see 1.2.1.3 and 1.2.1.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

3.7 Temperature. When resistors are tested as specified in 4.6.3, the change in resistance shall not exceed ±(1.0 percent + 0.05 ohm), for characteristic P and 2.0 percent for characteristic G. There shall be no evidence of mechanical damage.

3.8 Dielectric withstanding voltage (when applicable). When resistors are tested as specified in 4.6.4, there shall be no evidence of flashover.

3.9 Insulation resistance (when applicable). When resistors are tested as specified in 4.6.5, the insulation shall be not less than 100 megohms.

3.10 Power rating. When tested as specified in 4.6.6, resistors shall dissipate not less than the rated wattage, but shall not exceed the maximum continuous working voltage (see 3.1), without exceeding the hotspot temperature at 235° C for characteristic P and 275° C for characteristic G. For the purpose of this specification, the hotspot is defined as the elemental area of maximum temperature on the external surface of a resistor.

3.11 Thermal shock. When resistors are tested as specified in 4.6.7, the change in resistance shall not exceed 2.0 percent; nor shall there be any evidence of mechanical damage or any observable change in resistor coating, enclosure, or other parts which results in degradation of performance.

3.12 Momentary overload. When resistors are tested as specified in 4.6.8, the change in resistance shall not exceed 2.0 percent; nor shall there be any evidence of arcing, burning, or charring.

3.13 Moisture resistance. When resistors are tested as specified in 4.6.9, the change in resistance shall not exceed 3.0 percent, nor shall there be any evidence of breaking, cracking, spalling, or loosening of terminals. The insulation resistance of tab-terminal resistors shall be not less than 5.0 megohms.

3.14 Mechanical strength (when applicable). When resistors are tested as specified in 4.6.10, there shall be no evidence of mechanical damage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

3.15 Terminal strength.

3.15.1 Tab terminals. When resistors are tested as specified in 4.6.11, the change in resistance shall not exceed ±(1.0 percent + 0.05 ohm); nor shall the terminals break or pull loose.

3.15.2 Axial wire-lead terminals. When resistors are tested as specified in 4.6.11, the change in resistance shall not exceed ±(1.0 percent + 0.05 ohm); nor shall the terminals show any evidence of damage.

3.16 Solderability (when applicable). When resistors are tested as specified in 4.6.12, the dipped surface of the lead shall be at least 95-percent covered with a new, clean, continuous surface free from pinholes. The remaining 5 percent of the lead surface shall show only small pinholes, voids or rough spots; these shall not be no concentrated in one area. No individual void in the solder coating shall exceed the diameter of the lead. Bare base metal and areas where the solder dip failed to cover the original coating are indications of poor solderability, and shall be cause for failure. In case of dispute, the percent of coverage with pinholes or rough spots shall be determined by actual measurement of these areas, as compared to the total area.

3.17 Resistance-temperature characteristic. When resistors are tested as specified in 4.6.13, the resistance-temperature characteristic shall not exceed 0.05 percent per degree centigrade for all resistance values.

3.18 Load life. When resistors are tested as specified in 4.6.14, the change in resistance shall not exceed 2.0 percent for characteristic P and 5.0 percent for characteristic G between the initial resistance measurement and any succeeding measurement.

3.19 Shock, medium impact (when applicable). When resistors are tested as specified in 4.6.15, the change in resistance shall not exceed ±(0.5 percent +0.05 ohm); there shall be no electrical discontinuity in excess of 0.1 milliseconds (ms); and resistors shall show no evidence of mechanical or electrical damage.

Source: https://assist.dla.mil -- Downloaded: 2026l0-17T21:59Z
Check the source to verify that this is the currentversion before use.

3.20 Vibration, high frequency (when applicable). When resistors are tested as specified in 4.6.16, the change in resistance shall not exceed ±(0.5 percent +0.05 ohm); there shall be no electrical discontinuity in excess of 0.1 ms; and resistors shall show no evidence of mechanical or electrical damage.

3.21 Marking. Resistors shall be marked in accordance with MIL-STD-130, with the type designation, nominal power rating, and the manufacturer's name, trademark or code symbol. The marking shall appear on the body of the resistor, parallel to the longitudinal axis. Marking shall remain legible after all tests.

3.22 Workmanship. Resistors shall be processed in such a manner as to be uniform in quality and shall meet the requirements of 3.3 to 3.4.3, inclusive, 3.21, and 3.22.1, as applicable, and be free from other defects that will affect life, serviceability, or appearance.

3.22.1 Soldering. Where soldering is employed, only substantially noncorrosive fluxes shall be used unless it can be shown that corrosive elements have been satisfactorily removed after soldering. Solder shall not be used primarily for obtaining mechanical strength. Electrical connections shall be mechanically secure before soldering and electrically continuous after soldering.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.

4.1.1 Supplier. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:59Z
Check the source to verify that this is the currentversion before use.

4.1.1.1 Test equipment and inspection facilities. Test equipment and inspection facilities shall be of sufficient accuracy, quality, and quantity to permit performance of the required inspection. The supplier shall establish calibration of inspection equipment to the satisfaction of the Government.

4.2 Classification of inspection. The examination and testing of resistors shall be classified as follows:

(a) Qualification inspection (see 4.4).

(b) Quality conformance inspection (see 4.5).

1. Inspection of product for delivery (see 4.5.1).

2. Inspection of preparation for delivery (see 4.5.2).

4.3 Inspection conditions. Unless otherwise specified herein, all inspection shall be made under the conditions specified in the general requirements of MIL-STD-202.

4.3.1 Precautions. Adequate precautions shall be taken during inspection to prevent condensation of moisture on resistors, except during the moisture-resistance test.

4.4 Qualification inspection. Qualification inspection shall be performed at a laboratory approved by the Government (see 6.2).

4.4.1 Sample. The number of sample units comprising a sample of resistors to be submitted for qualification inspection shall be as specified in the appendix to this specification.

4.4.2 Test routine. Sample units will be subjected to the qualification inspection specified in table V, in the order shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

Table V. Qualification inspection.

Examination or test	Requirement paragraph	Method paragraph	Number of defectives allowed[1]
Group I			
Visual and mechanical examination[2/3]	3.1, 3.3 to 3.4.3 incl., and 3.21 to 3.22.1 incl.	4.6.1	0
DC resistance[3]	3.6	4.6.2	
Group II			
Temperature[3]	3.7	4.6.3	1
Dielectric withstanding voltage (when applicable)[3]	3.8	4.6.4	
Insulation resistance (when applicable)[3]	3.9	4.6.5	
Power rating[3]	3.10	4.6.6	
Thermal shock	3.11	4.6.7	
Momentary overload	3.12	4.6.8	
Moisture resistance	3.13	4.6.9	
Mechanical strength (when applicable)	3.14	4.6.10	1
Terminal strength	3.15	4.6.11	
Group III			
Solderability (when applicable)[3]	3.16	4.6.12	1
Resistance-temperature characteristic	3.17	4.6.13	0 → 1
Load life	3.18	4.6.14	1
Group IV			
Shock, medium impact (when applicable)	3.19	4.6.15	1
Vibration, high frequency (when applicable)	3.20	4.6.16	

1/ Failure of a resistor in one or more of the applicable groups will be charged as a single defective.

2/ Marking will be considered defective only if the marking is illegible.

3/ Nondestructive tests.

Source: https://assist.dla.mil -- Downloaded: 202640-17T21:59Z
Check the source to verify that this is the currentversion before use.

4.4.2.1 Single-type submission. All sample units shall be subjected to the inspection of group I. The sample units shall then be divided equally into two groups of tab-terminal resistors and subjected to the tests of groups II and III, respectively, or shall be divided equally into three groups of axial wire-lead resistors and subjected to the tests of groups II, III, and IV, respectively.

4.4.2.2 Combined-type submission. All sample units shall be subjected to the inspection of group I. Sample units of the lowest resistance value shall then be divided equally into two groups and subjected to the tests of groups II and III, respectively. Sample units of the highest resistance value shall be divided equally into two groups of tab-terminal resistors and subjected to the tests of groups II and III, respectively, or shall be divided equally into three groups of axial wire-lead resistors and subjected to the tests of groups II, III, and IV, respectively. If sample units of the critical resistance value are submitted, they shall be divided equally into two groups and subjected to the tests of groups II and III, respectively.

4.4.3 Defectives. Defectives in excess of those allowed in table V shall be cause for refusal to grant qualification.

4.5 Quality conformance inspection.

4.5.1 Inspection of product for delivery. Inspection of product for delivery shall consist of groups A, B, and C.

4.5.1.1 Inspection lot. An inspection lot, as far as practicable, shall consist of all the resistors of the same style and characteristic. The resistance values contained in the sample shall be representative of the resistance values contained in the inspection lot.

4.5.1.2 Rejected lots. If an inspection lot is rejected, the supplier shall withdraw the lot and may then rework it to correct the defects, or screen out the defective units. Such lots shall be kept separate from new lots, and shall be clearly identified as lots to be reinspected. Such lots shall be reinspected using tightened inspection.

Source: https://assist.dla.mil -- Downloaded: 20260-17T21:59Z
Check the source to verify that this is the currentversion before use.

4.5.1.3 Group A inspection. Group A inspection shall consist of the examinations and tests specified in table VI, and shall be made on the same set of sample units.

4.5.1.3.1 Sampling plan. Statistical sampling and inspection shall be in accordance with MIL-STD-105 for ordinary inspection. The acceptable quality levels (AQL) shall be as specified in table VI. Major and minor defects shall be as defined in MIL-STD-105.

Table VI. Group A inspection.

Examination or test	Requirement paragraph	Method paragraph	AQL (percent defective)	
			Major	Minor
Visual and mechanical examination.....	3.1, 3.3 to 3.4.3 incl., and 3.21 to 3.22.1 incl.	4.6.1	1.0	4.0
DC resistance.....	3.6	4.6.2	1.0	---

4.5.1.4 Group B inspection. Group B inspection shall consist of the tests specified in table VII, in the order shown.

Table VII. Group B inspection.

Test	Requirement paragraph	Method paragraph
Temperature.....	3.7	4.6.3
Dielectric withstanding voltage (when applicable).....	3.8	4.6.4
Insulation resistance (when applicable).....	3.9	4.6.5
Thermal shock.....	3.11	4.6.7
Momentary overload.....	3.12	4.6.8

4.5.1.4.1 Sampling plan. The sampling plan shall be in accordance with MIL-STD-105 for small-sample inspection. Unless otherwise specified herein, S-2 inspection shall be used. The AQL shall be 6.5 (percent defective).

Source: https://assist.dla.mil -- Downloaded: 202640-17T21:59Z
Check the source to verify that this is the currentversion before use.

4.5.1.4.2 Disposition of sample units. Sample units which have passed all the group B inspection may be delivered on the contract or order, at the option of the supplier, provided that at the end of group B inspection the resistors are within the initial resistance tolerance and can pass visual examination.

4.5.1.5 Group C inspection. Group C inspection shall consist of the tests specified in table VIII, in the order shown. They shall be performed on sample units that have passed all group A inspection. In addition, the sample units subjected to the tests of subgroup 1, during the quarterly inspection, shall also have passed the group B inspection.

Table VIII. Group C inspection.

Test	Requirement paragraph	Method paragraph	Number of sample units to be inspected	Number of failures allowed 1/
Monthly				
Solderability (when applicable)	3.16	4.6.12	6	1
Resistance-temperature characteristic	3.17	4.6.13		0
Quarterly				
Subgroup 1				
Power rating	3.10	4.6.6	6	1
Moisture resistance	3.13	4.6.9		
Mechanical strength (when applicable)	3.14	4.6.10		
Terminal strength	3.15	4.6.11		
Subgroup 2				
Solderability (when applicable)	3.16	4.6.12	6	
Resistance-temperature characteristic	3.17	4.6.13		
Load life	3.18	4.6.14		
Subgroup 3				
Shock, medium impact (when applicable)	3.19	4.6.15	6	
Vibration, high frequency (when applicable)	3.20	4.6.16		

1/ A sample unit having one or more defects will be charged as a single failure.

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:59Z
Check the source to verify that this is the current version before use.

4.5.1.5.1 Sampling plan. Sample units of the style currently in production shall be selected without regard to their quality. The number of sample units to be inspected shall be in accordance with table VIII. A different sample shall be selected for each sampling period and for each subgroup listed. If the number of failures exceeds the number allowed in table VIII, the sample shall be considered to have failed.

4.5.1.5.1.1 Monthly. Every month, sample units of the lowest resistance value shall be subjected to the monthly inspection specified in table VIII.

4.5.1.5.1.2 Quarterly. Every 3 months, sample units of the highest resistance value or the value nearest the critical resistance value (see table IX) shall be subjected to the tests of subgroups 1 and 2, respectively, as specified in table VIII. In addition, sample units of axial wire-lead resistors of any resistance value shall also be subjected to the tests of subgroup 3.

4.5.1.5.1.3 Disposition of sample units. Sample units of styles RD60, RD65, and RD70, when subjected to the solderability test, shall not be delivered on the contract or order. Sample units of styles RD31, RD33, RD35, RD37, and RD39, which have passed the monthly tests, may be delivered on the contract or order, at the option of the supplier. Sample units subjected to the quarterly tests shall not be delivered on the contract or order.

4.5.1.5.1.4 Noncompliance. If a sample fails to pass group C inspection, the supplier shall take corrective action on the materials or process, or both, as warranted, and on all units of product which can be corrected and which were manufactured under essentially the same conditions, with essentially the same materials, processes, etc, and which are considered subject to the same failure. Acceptance of the product shall be discontinued until corrective action, acceptable to the Government, has been taken. After the corrective action has been taken, group C inspection shall be repeated on additional sample units (all inspection, or the inspection which the original sample failed, at the option of the Government). Groups A and B inspection may be reinstituted; however, final acceptance shall be withheld until the group C reinspection has shown that the corrective

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

action was successful. In the event of failure after reinspection, information concerning the failure and the corrective action taken shall be furnished to the contracting officer.

4.5.2 Inspection of preparation for delivery. Sample items and packs shall be selected and inspected in accordance with MIL-P-116 to verify conformance with requirements in section 5 of this specification.

4.6 Methods of examination and test.

4.6.1 Visual and mechanical examination. Resistors shall be examined to verify that the materials, design, construction, physical dimensions, marking, and workmanship are in accordance with the applicable requirements. (See 3.1, 3.3 to 3.4.3 incl., and 3.21 to 3.22.1 incl.)

4.6.2 DC resistance (see 3.6). The dc resistance shall be measured in accordance with method 303 of MIL-STD-202. The following details and exceptions shall apply:

(a) Measuring apparatus - The same measuring instrument shall be used for any one test but not necessarily for all tests. The method employed for the measurement of dc resistance shall be such that for each measurement the combined inherent errors shall not exceed 0.2 percent.

(b) Test voltage - Measurements of dc resistance shall be made by using a dc potential resulting in not more than 1.0 percent of rated wattage. The dc potential thus determined shall be the same for all subsequent measurements of dc resistance.

(c) Temperature - The dc resistance test specified in group I of table V shall be performed at 25° ± 2° C. For all other dc resistance tests, unless specified herein, the temperature at which the subsequent and final measurements are made in each test shall be within ±2° C of the temperature at which the initial resistance measurement was made.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

4.6.3 Temperature (see 3.7). Resistors shall be placed on an oven at room temperature. The temperature of the oven shall then be raised gradually to $235^{+0^\circ}_{-5^\circ}$ C for characteristic P and $275^{+0^\circ}_{-5^\circ}$ C for characteristic G. The period of the transition from room temperature to the maximum temperature shall be not more than 45 minutes. The resistors shall then be conditioned at the maximum temperature for a period of 2 hours. After conditioning, and while resistors are still in the oven, they shall be allowed to cool gradually to room temperature. The transition period shall be not less than 30 minutes. DC-resistance measurements as specified in 4.6.2 shall be made not less than 2 hours after this period. Melting or softening of the solder on the terminal, if employed solely as a tinning agent, shall be no cause for rejection.

4.6.4 Dielectric withstanding voltage (when applicable) (see 3.8).

4.6.4.1 At atmospheric pressure. Resistors shall be tested in accordance with method 301 of MIL-STD-202. The following details shall apply:

(a) Special preparations - Resistors shall be mounted without supplementary insulation, between two metal plates normal to the horizontal axis of the resistor (one plate at each end) held firmly against the ends of the resistor by through bolts. These plates shall be of sufficient size to extend beyond the extremities of the resistor terminals.

(b) Magnitude of test voltage - As specified (see 3.1).

(c) Nature of potential - An alternating current (ac) supply at commercial-line frequency and waveform.

(d) Points of application of test voltage - Between the resistor terminals connected together and the end plates.

(e) Examination after test - Resistors shall be examined for evidence of flashover.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T21:59Z
Check the source to verify that this is the current version before use.

4.6.4.2 At barometric pressure. Following the test specified in 4.6.4.1, resistors shall be tested in accordance with method 105 of MIL-STD-202. The following details shall apply:

(a) Method of mounting - As specified in 4.6.4.1(a).

(b) Test condition - B (50,000 feet).

(c) Magnitude of test voltage - As specified (see 3.1).

(d) Nature of potential - As specified in 4.6.4.1(c).

(e) Points of application of test voltage - As specified in 4.6.4.1(d).

(f) Examination after test - As specified in 4.6.4.1(e).

4.6.5 Insulation resistance (when applicable) (see 3.9). Resistors shall be tested in accordance with method 302 of MIL-STD-202. The following details shall apply:

(a) Test condition - A.

(b) Special preparations - As specified in 4.6.4.1(a).

(c) Points of measurement - Between the resistor terminals connected together and the end plates.

4.6.6 Power rating (see 3.10).

4.6.6.1 Mounting. Resistors shall be supported horizontally, without mounting hardware, by means of their terminals; no object shall be closer than ½ inches to the protective coating except the supporting base, which shall be not closer than 2 inches below the resistor.

4.6.6.2 Test conditions. Resistors shall be supported in still air at an ambient temperature of $25^{+5^\circ}_{-0^\circ}$ C. For the purpose of this specification, still air is defined as the surrounding air with no circulation other than that created by the heat of the resistor being operated. If the power rating is measured at a prevailing ambient room temperature other than 25° C, a power-rating correction factor with reference to the 25° C ambient temperature shall be applied in accordance with the derating curve shown on figure 1.

Source: https://assist.dla.mil -- Downloaded: 20260-17T21:59Z
Check the source to verify that this is the current version before use.

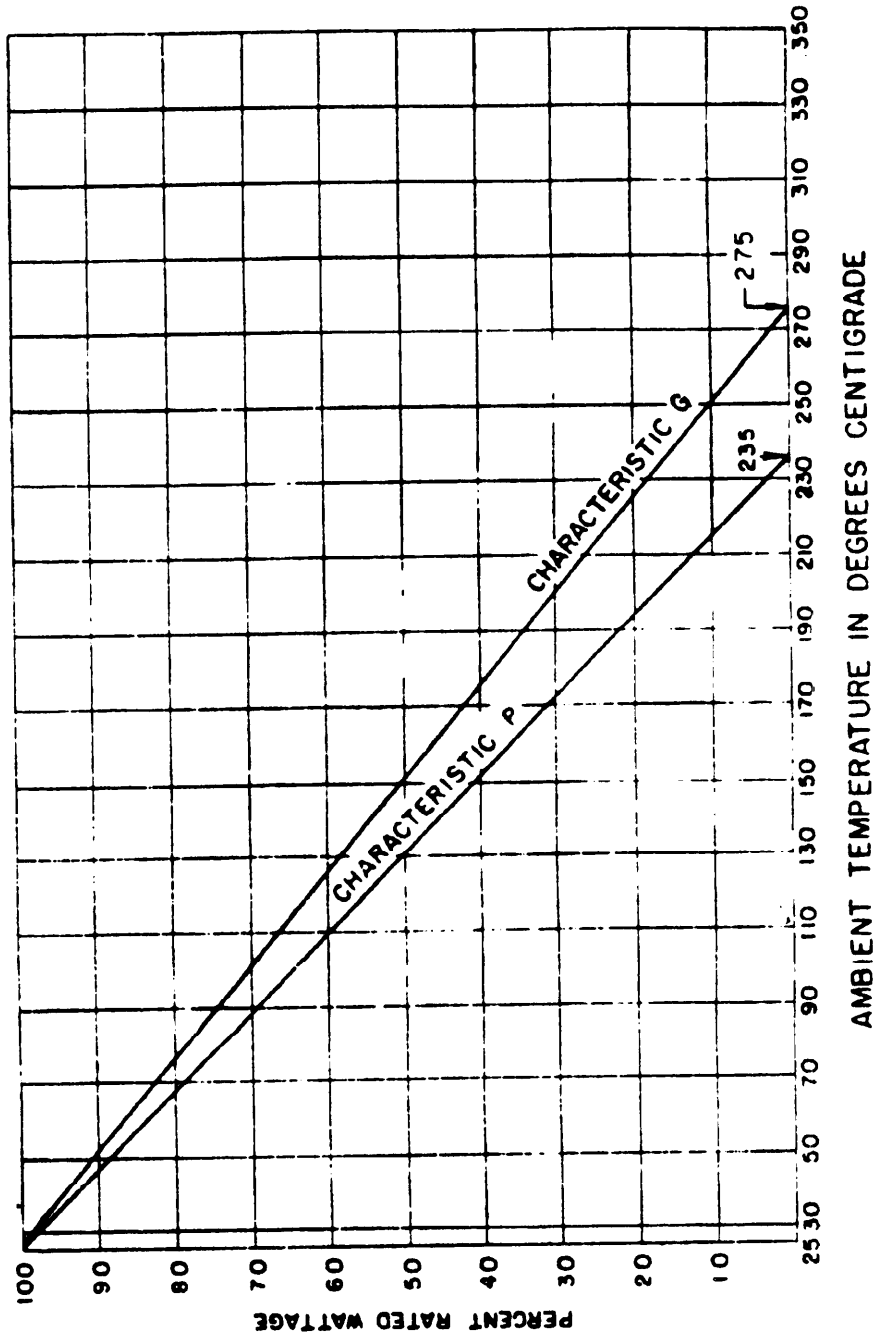


Figure 1. Derating curves for high ambient temperatures.

Source: https://assist.dla.mil -- Downloaded: 2026[illegible]-17T21:59Z
Check the source to verify that this is the current version before use.

4.6.6.3 Measurement of ambient temperature. The ambient temperature shall be measured on a level with, and at a point approximately 12 inches from, the nearest part of the nearest resistor under test.

4.6.6.4 Thermocouple. A thermocouple composed of wire 0.01 inch in diameter (No. 30 AWG), or smaller, shall have its thermojunction placed on the hotspot of the external surface of the resistor with the thermocouple wires hanging down on opposite sides of the resistor. Weights of at least 2 ounces on each lead shall provide the pressure of the thermojunction against the surface of the resistor. The thermocouple wire shall not extend more than 1/8 inch beyond the junction. If desired, a small strip of electrical insulation, no thicker than 0.002 inch, may be placed between the thermocouple junction and the exterior surface of the resistor to protect instrumentation from high-voltage hazards.

4.6.6.5 Procedure. Rated voltage not to exceed the maximum continuous working voltage (see 3.1) shall be applied to the resistor until there is no appreciable temperature change indicated on the thermocouple between two successive readings taken at 5-minute intervals. When this point of stability is reached, the reading of the thermocouple shall be taken as the hotspot temperature.

4.6.7 Thermal shock (see 3.11). Resistors shall be supported on a rack of low-heat conducting material. Following a measurement of dc resistance as specified in 4.6.2, rated voltage not to exceed the maximum continuous working voltage (see 3.1) shall be applied until thermal stability has been reached (see 4.6.6.5). The power shall then be removed and, within 8 to 12 seconds, the resistors shall be subjected to an air temperature of -55°±5° C for a period of not less than 15 minutes nor more than 30 minutes. Immediately following this period of exposure, the resistors shall be conditioned for 1 hour at room ambient temperature. Immediately thereafter, the dc resistance shall again be measured and resistors shall be examined for evidence of mechanical damage and change in resistor parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

4.6.8 Momentary overload (see 3.12). Resistors shall be mounted by their normal mountin means. A dc potential which will result in 10 times rated wattage (see 3.1) for characteristic P and 6.25 times rated wattage (see 3.1) for characteristic G or 1,500 volts per linear inch of resistance element (measured between the inner edges of the terminals), whichever is less, shall be applied to the resistors for 5 seconds. In no case shall the applied voltage exceed 15,000 volts. DC resistance shall be measured as specified in 4.6.2 within at least 30 minutes after removal of the test potential and resistors shall be examined for evidence of arcing, burning, or charring.

4.6.9 Moisture resistance (see 3.13). Resistors shall be tested in accordance with method 106 of MIL-STD-202. The following details and exceptions shall apply:

(a) Mounting:

1. Tab terminals - One half of the resistors shall be mounted by means of their associated hardware and supplementary insulation; the remaining half, as specified in 4.6.4.1(a). Resistors under load shall be mounted not less than 2-1/2 inches apart.

2. Axial wire-lead terminals - Resistors shall be soldered by their terminal leads to rigid mounts or to terminal lugs so spaced that the length of each resistor lead will be approximately 3/8 inch, when measured from the edge of the supporting terminal to the resistor body.

(b) Initial measurements - DC resistance and insulation resistance (when applicable) shall be measured as specified in 4.6.2 and 4.6.5, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

(c) Polarization and loading voltage:

1. Tab terminals - For resistors mounted with supplementary insulation, during steps 1 and 4, a dc potential, which will result in 85 percent of rated wattage shall be applied for the first 2 hours of each step. For the remaining resistors, during steps 1 to 6 inclusive a 100-volt dc potential shall be applied with positive connected to the resistor terminals tied together and negative connected to the mounting hardware.

2. Axial wire-lead terminals - During steps 1 and 4, a potential which will result in 85 percent of rated wattage shall be applied for the first 2 hours of each step. Polarization is not applicable.

(d) Final measurements - At the end of the final cycle and while the resistors are still in the humidity chamber at the high-humidity condition, the dc resistance and insulation resistance (when applicable) shall be measured as specified in 4.6.2 and 4.6.5, respectively, and resistors shall be examined for evidence of mechanical damage. The subsequent 4- to 24- hour conditioning period and measurements do not apply.

4.6.10 Mechanical strength (when applicable) (see 3.14). Resistors shall be supported 1/8 inch from each end and subjected to a transverse load of 50 pounds applied at the center of the resistor through a fulcrum having a radius of not less than 0.125 inch nor more than 0.375 inch. Resistors shall then be examined for evidence of mechanical damage.

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:59Z
Check the source to verify that this is the currentversion before use.

4.6.11 Terminal strength (see 3.15). Resistors shall be tested in accordance with method 211 of MIL-STD-202. The following details and exceptions shall apply:

(a) Test conditions - A for all resistors and D for axial wire-lead terminal resistors only.

(b) Measurement before test (A) - DC resistance as specified in 4.6.2.

(c) Method of holding (A) - Clamped by one terminal lead (axial-wire lead terminal resistors).

(d) Applied force (A) - 10 pounds for tab-terminal resistors and 5 pounds for axial wire-lead terminal resistors.

(e) Measurement after test - DC resistance as specified in 4.6.2, with test condition A for tab-terminal resistors, and test condition D for axial wire-lead terminal resistors.

(f) Examination after test - Resistors shall be examined for breakage or loosening of terminals or other evidence of mechanical damage.

4.6.12 Solderability (when applicable) (see 3.16). Resistors shall be tested in accordance with method 208 of MIL-STD-202. The following detail shall apply: Both terminals of each resistor shall be tested.

4.6.13 Resistance-temperature characteristic (see 3.17). Resistors shall be tested in accordance with method 304 of MIL-STD-202. The following details and exceptions shall apply:

(a) Initial measurement - DC resistance shall be measured as specified in 4.6.2 at 25° ±2° C.

(b) Test temperatures - -55°, 25° ±2°, 125°, and 235° C (characteristic F); or 275° C (characteristic G). The temperature of 25° ±2° C shall be considered the reference temperature for each of the succeeding extreme temperatures.

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:59Z
Check the source to verify that this is the currentversion before use.

4.6.14 Load life (see 3.18). Resistors shall be tested in accordance with method 108 of MIL-STD-202. The following details and exceptions shall apply:

(a) Method of mounting - Axial wire-lead terminal resistors shall be soldered to lightweight terminals. The effective length of each lead shall be 1 inch. Tab-terminal resistors shall be mounted by means of their associated hardware, with wire leads soldered to their terminals to make connections for applying the load. Resistors shall be so arranged that the temperature of one resistor will not appreciably influence the temperature of any other resistor.

(b) Test temperature -

1. Qualification inspection - 25° ±5° C.

2. Group C inspection: One half of the axial wire-lead terminal resistors shall be tested at 125° ±5° C, and the other half shall be tested at 25° ±5° C. Samples tested at 125° ±5° C shall be run at 60 percent of rated power for characteristic G and 50 percent of rated power for characteristic P. Tab-terminal resistors shall be tested at 25° ±5° C.

(c) Initial measurements - Measurements may be made inside or outside of the chamber.

1. Inside chamber - When measurements are to be made inside the chamber, the initial dc resistance shall be measured after mounting at the applicable test temperature after temperature stabilization and within 8 hours of exposure of the resistors to the test temperature. This initial measurement shall be used as the reference temperature for all subsequent measure-

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:59Z
Check the source to verify that this is the currentversion before use.

ments under the same conditions.

2. Outside chamber - When measurements are to be made outside the chamber, the initial dc resistance shall be measured after mounting at the room temperature. This initial measurement shall be used as the reference temperature for all subsequent measurements under the same conditions.

(d) Operating conditions - Rated dc continuous working voltage except as specified for axial wire-lead terminal resistors (see 4.6.14(b)2). shall be applied intermittently, 1-1/2 hours on and 1/2 hour off, for 1,000 ± 12 hours (test condition D), at the applicable test temperature.

(e) Test condition - D.

(f) Measurements during test - DC resistance measurements as specified in 4.6.2 shall be made at the end of the 1/2-hour "off" periods after 50±8, 100±8, 200±8, 500±12, 750±12, and 1,000±12 hours have elapsed.

4.6.15 Shock, medium impact (when applicable) (see 3.19). Resistors shall be tested in accordance with method 205 of MIL-STD-202. The following details and exceptions shall apply:

(a) Special mounting means - Resistors shall be rigidly mounted and clamped on appropriate jig fixtures and their leads supported at a distance of 1/4 inch from the resistor body. The jig fixtures shall be so constructed that the points of the resistor mounting supports will remain in the static condition with reference to the shock table. Test leads, used during this test, shall be no larger than No. 22 AWG stranded wire so that the influence of the test lead on the resistor will be held to a minimum. The

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:59Z
Check the source to verify that this is the currentversion before use.

test-lead length shall be no longer than necessary. In all cases, resistors shall be mounted in relation to the test equipment in such a manner that the stress applied is in the direction which would be considered most detrimental.

(b) Test condition - C.

(c) Measurement before shock - DC resistance shall be measured as specified in 4.6.2.

(d) Number and direction of applied shocks - The resistors shall be subjected to a total of 10 shocks in each of two mutually perpendicular planes, one perpendicular and the other parallel to the longitudinal axis of the resistor.

(e) Measurement during shock - Each resistor shall be monitored to determine electrical discontinuity by a method which shall at least be sensitive enough to monitor or register, automatically, any electrical discontinuity of 0.1 ms or greater duration.

(f) Measurement after shock - DC resistance shall be measured as specified in 4.6.2.

(g) Examination after test - Resistors shall be examined for evidence of mechanical and electrical damage.

4.6.16 Vibration, high frequency (when applicable) (see 3.20). Resistors shall be tested in accordance with method 204 of MIL-STD-202. The following details and exceptions shall apply:

(a) Special mounting means - Resistors shall be rigidly mounted and clamped on appropriate jig fixtures and their leads supported at a distance of 1/4 inch from the resistor body. The jig fixtures shall be so constructed that the points of the resistor mounting supports will have the same motion as the vibration-test table. The fixtures shall also

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:59Z
Check the source to verify that this is the currentversion before use.

be of a construction that will preclude any resonance in the fixture when subjected to vibration within the test-frequency range, and the fixture shall be monitored for these features on the vibration table. Test leads, used during this test, shall be no larger than No. 22 AWG stranded wire so that the influence of the test lead on the resistor will be held to a minimum. The test-lead length shall be no longer than necessary. A shielded cable which may be necessary because of the field surrounding the vibration table shall be clamped to the resistor mounting jig. In all cases, resistors shall be mounted in relation to the test equipment in such a manner that the stress applied is in the direction which would be considered the most detrimental.

(b) Measurement before vibration - DC resistance shall be measured as specified in 4.6.2.

(c) Test condition - C.

(d) Measurements during vibration - Each resistor shall be monitored to determine electrical discontinuity by a method which shall at least be sensitive enough to monitor or register, automatically, any electrical discontinuity of 0.1 millisecond or greater duration.

(e) Measurements after vibration - DC resistance shall be measured as specified in 4.6.2.

(f) Examination after test - Resistors shall be examined for evidence of mechanical and electrical damage.

4.6.17 Retention of qualification. In order to retain qualification, the supplier shall forward via the government inspector at 6-month intervals, to the activity responsible for qualification, a summary of the results of groups A and B tests indicating as a minimum the number of lots which passed and the number which failed, and a summary of

Source: https://assist.dla.mil -- Downloaded: 20261O-17T21:59Z
Check the source to verify that this is the current version before use.

the results of group C tests, including the number and type of any part failures. The summary shall include those tests performed during that 6-month period. If the summary of the test results indicates nonconformance with specification requirements, action will be taken to remove the failing product from the qualified products list. Failure to submit the summary will result in loss of qualification for that product. In addition to the periodic submission of inspection data, the supplier shall immediately notify the qualifying activity at any time during the 6-month period that the inspection data indicates failure of the qualified product to meet the requirements of the specification.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging (see 6.1).

5.1.1 Level A.

5.1.1.1 Cleaning. Unless otherwise specified, resistors shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. None required.

5.1.1.3 Preservative compounds. None required.

5.1.1.4 Unit packaging.

5.1.1.4.1 Resistors under 3 1/2 inches. Unless otherwise specified (see 6.1), resistors under 3 1/2 inches in body length shall be individually packaged in accordance with submethod IA-8 of MIL-P-116. Wrapping, cushioning, or dunnage materials shall be applied to meet the general requirements of the methods of preservation of MIL-P-116. The cushioned item shall be sealed within a close fitting bag fabricated in accordance with MIL-B-117, class e.

5.1.1.4.2 Resistors over 3 1/2 inches. Unless otherwise specified (see 6.1), resistors over 3 1/2 inches in body length packaged as specified in 5.1.1.4.1 shall be additionally inserted within a close fitting container conforming to PPP-B-566 or PPP-B-676.

5.1.1.5 Bracket assembly. Bracket assemblies, when supplied with the resistor, shall be enclosed in a wrap or bag and sealed within the unit package.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T21:59Z
Check the source to verify that this is the current version before use.

5.1.1.6 Intermediate packaging. Resistors under 3 1/2 inches in body length shall be further packaged in intermediate containers conforming to PPP-B-566, PPP-B-676, or PPP-B-636. Intermediate containers shall be uniform in size and shape, shall be of minimum cube and tare consistent with the protection required and shall contain multiples of five unit packages not to exceed 100 packages or ten pounds insofar as practical.

5.1.2 Level C. Resistors shall be preserved and packaged in a manner that will afford adequate protection against corrosion, deterioration, and physical damage during shipment from supply source to the first receiving activity for immediate use. The level may conform to the supplier's commercial practice for retail distribution when such meets the requirements of this level.

5.2 Packing.

5.2.1 Level A. The packaged items shall be packed in fiberboard containers conforming to PPP-B-636, weather resistant, style optional, special requirement. In lieu of the closure and waterproof requirements, closures and waterproofing shall be accomplished by sealing the center seams, ends, edges and manufacturer's joints with waterproof tape, 3 inches wide, conforming to PPP-T-60. Banding (reinforcement requirements) excluding metal shall be applied in accordance with the appendix to PPP-B-636.

5.2.2 Level B. The packaged item shall be placed in fiberboard containers conforming to PPP-B-636, class domestic, optional requirements. Box closures shall be in accordance with Method 1 of the appendix to PPP-B-636.

5.2.3 Level C. The packaged item shall be packed in a manner that will afford adequate protection against damage during direct shipment from the supply source to the first receiving activity for immediate use. This pack shall conform to the applicable carrier rules and regulations and may be the supplier's commercial practice when such conforms to the requirements of this level.

5.2.4 General. Exterior containers shall be uniform in size and shape, shall be of minimum cube and tare consistent with the protection required and shall contain equal quantities of identical items to the greatest extent practical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special marking required by the contract or order, unit packages, intermediate, and exterior containers shall be marked in accordance with MIL-STD-129.

5.4 Workmanship. The packaged item shall be prepared for delivery in such a manner that is uniform in quality and free from defects that will affect service life or appearance of the items, packages or packs.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Title, number, and date of the applicable detail specification, and the complete type designation (see 1.2.1 and 3.1).

(c) Levels of preservation and packaging and packing, and applicable marking (see sect 5).

(d) Method of preservation and packaging of MIL-P-116, if other than specified (see 5.1.1).

(e) Number of unit packages if other than that specified in 5.1.1.4.

(f) Whether bracket assembly is required (see 5.1.1.5 and 6.4).

6.1.1 Indirect shipments. The packaging, packing, and marking specified in section 5 apply only to direct purchases by or direct shipments to the Government and are not intended to apply to contracts or orders between the supplier and prime contractor.

6.2 Qualification. With respect to products requiring qualification, awards, will be made only for such products as have, prior to the time set for opening of bids, been tested and approved for inclusion in the applicable qualified products list whether or not such products have actually been so listed by that date. The attention of the suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government, tested for qualification, in order that they may be eligible to be awarded contracts or orders for the products

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

covered by this specification. The activity responsible for the Qualified Products List is the Electronics Command, however, information pertaining to qualification or products may be obtained from the Defense Electronics Supply Center (DESC-E), 1507 Wilmington Pike, Dayton, Ohio 45401.

6.3 Derating. The purpose of this specification is to cover resistors capable to continuous operation at rated wattage of any ambient temperature up to and including 25° C. However, if it is desired to operate these resistors at an ambient temperature greater than 25° C, the resistors should be derated in accordance with figure 1. It is advisable that for continuous operation, the resistors should not be operated above a temperature of 200° C.

6.4 Bracket assembly (for tab-terminal resistor only). When required (see 6.1), bracket assemblies (mounting hardware) are available for these resistors under MS75009, "Bracket Assembly, Resistor (Power type)".

6.5 Power and voltage ratings. Unless otherwise specified (see 4.6.4.2), the power and voltage ratings contained in this specification as based on tests performed at sea level.

6.6 Spacing. When resistors are mounted in rows or banks, they should be so spaced that, taking into consideration the restricted ventilation and heat dissipation by the nearby resistors, no resistor in the bank or row exceeds its maximum permissible hotspot temperature. An appropriate combination of resistor spacing and resistor power rating must be chosen if this is to be assured.

6.7 Deletion of acceleration test. Test data and experience have shown that no failures have been attributed to acceleration testing of fixed resistors. As a result, the acceleration test has been deleted from this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

6.8 Interchangeability. Items in this specification are mutually interchangeable with items of the same style and characteristic procured under MIL-R-11804D.

6.9 Standard resistor types. Equipment designers should refer to MIL-STD-199 "Resistors," for standard resistor types and selected values chosen from this specification. MIL-STD-199 provides a selection of standard resistors for new equipment design. It is to be noted that characteristic P shall not be used for new design, but for replacement purposes only.

Custodians:
Army - EL
Navy - SH
Air Force - 11

Review activities:
Army - MU, EL
Navy - SH
Air Force - 11, 17, 85

User activities:
Army -
Navy - MC
Air Force -

Preparing activity:
Army - EL

(Project 5905-0322)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

APPENDIX

PROCEDURE FOR QUALIFICATION INSPECTION

10. SCOPE

10.1 This appendix details the procedure for submission of samples, with related data, for qualification inspection of resistors covered by this specification. The procedure for extending qualification of the required sample to other resistors covered by this specification is also outlined herein.

20. SUBMISSION

20.1 Sample.

20.1.1 Single-type submission. A sample consisting of [1/] 18 sample units of each type for which qualification is sought shall be submitted. Tab-terminal sample units shall be furnished with their associated hardware. (See 6.4.)

20.1.2 Combined-type submission. A sample consisting of 12 sample units of the lowest resistance value and [1/] 18 sample units of the highest resistance value, in the style and characteristic and closest resistance tolerance for which qualification is sought, shall be submitted. If the critical resistance value (see table IX) is less than the highest resistance value, 12 sample units of the critical resistance value in the closest resistance tolerance for which qualification is sought shall also be submitted. Tab-terminal sample units shall be furnished with their associated hardware. (See 6.4.)

[1/] Only 12 sample units shall be submitted when tab-terminal resistors are submitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

Table IX. Critical resistance values

Style	Critical resistance value	
	Characteristic P	Characteristic G
	Ohms	Ohms
RD31	38,300	------
RD33	140,000	------
RD35	205,000	------
RD37	237,000	------
RD39	536,000	------
RD60	121,000	56,200
RD65	121,000	61,900
RD70	140,000	68,100

20.1.2.1 Critical resistance value. The critical resistance value is that which will dissipate full wattage when the maximum continuous working voltage is applied. (See 3.1.)

20.2 Test data. When examinations and tests are to be performed at a Government laboratory, prior to submission, all sample units shall be subjected to all of the examinations and tests indicated as nondestructive in table V. Each submission shall be accompanied by test data obtained from these examinations and tests. The performance of the destructive tests by the supplier on a duplicate set of sample units is encouraged, although not required. All test data shall be submitted in duplicate.

20.3 Description of items. The supplier shall submit a detailed description of the resistors being submitted for test, including a description of the material used for the resistance element and the protective coating or enclosure.

30. EXTENT OF QUALIFICATION

30.1 Single-type submission. Qualification will be granted only for the type submitted.

30.2 Combined-type submission. Qualification will be granted for all values between the adjacent resistance values which pass the qualification inspection. Qualification of G-tolerance resistors will also qualify J-tolerance resistors. Also, qualification of inspection characteristic G resistors will also qualify characteristic P resistors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Electronics Command
ATTN: DRSEL-RD-TS-S
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.