MIL-T-11752B
9 JUNE 1961
SUPERSEDING
MIL-H-11752A (CE)
23 SEPTEMBER 1958

MILITARY SPECIFICATION

TENSION HANDLE, STEEL MEASURING TAPE, SURVEYOR'S

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers a spring-scale, tension handle for use with a surveyor's measuring tape.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-B-636 —Box, Fiberboard.
PPP-T-60 —Tape; Pressure Sensitive Adhesive, Waterproof for Packaging and Sealing.

MILITARY

MIL-P-116 —Preservation, Methods of.

STANDARDS

MILITARY

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.
MIL-STD-130—Identification Marking of U.S. Military Property.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

OFFICIAL CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules.

(Application for copies should be addressed to the Official Classification Committee, 1 Park Avenue at 33rd Street, New York 16, N. Y.)

AMERICAN TRUCKING ASSOCIATION
National Motor Freight Classification Rules.

(Application for copies should be addressed to the American Trucking Association, 1424 16th Street NW, Washington, D. C.)

3. REQUIREMENTS

3.1 Description. The tension handle shall a be a spring-scale device as shown in figure 1. The body, end pieces, and pointer assembly shall be fabricated of corrosion-resistant metal. The rings, snap hook, and tape pull shall be fabricated of corrosion-resistant metal or shall be treated for corrosion resistance by coating or plating. The spring shall be a medium- or high-carbon steel. The body shall be graduated for a length of not less than 2 inches in ½-pound increments from 0 to 30 pounds. The slot in which the pointer moves shall be of sufficient length and width to permit the pointer to pass freely to a short distance beyond the 30-pound graduation. The tape pull shall be readily detachable. The snap hook shall be of the swivel type and suitable for fastening to the end loop of a surveyor's steel tape. A leather thong approximately 36 inches long, ⅜ inch wide, and 3/16 inch thick shall be furnished

FSC 6675

611041-61-(89)

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:56Z
Check the source to verify that this is the current version before use.

with each handle. The leather thong shall contain 0.20 to 0.50 percent paranitrophenol to render it fungus resistant.

3.2 **Material.** Material shall be as specified herein. Material not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3 **Accuracy.** The spring and pointer assembly shall indicate the applied load within ½ pound in the range between 10 to 30 pounds at plus 75° F. and within 1 pound at minus 25° F. and at plus 125° F.

3.4 **Identification marking.** Each handle shall be identified in accordance with Standard MIL-STD-130.

4. QUALITY ASSURANCE PROVISIONS

4.1 The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 **Classification of inspection.** Inspection shall be classified as follows:

(a) Production inspection of the tension handle.
(b) Inspection of preparation for delivery.

4.3 **Production inspection.**

4.3.1 *Sampling.* Sampling for examination and test shall be in accordance with Standard MIL-STD-105.

4.3.2 *Examination.* Samples selected in accordance with 4.3.1 shall be examined for the defects listed below. AQL shall be 2.5 percent defective.

101. Material not as specified.
102. Dimensions not as specified.
103. Tape pull not detachable.
104. Snap hook not constructed to swivel freely.
105. Graduations not clearly numbered.

4.3.3 *Test.* Samples selected in accordance with 4.3.1 shall be tested as follows.

4.3.3.1 *Accuracy.* A known weight between the range of 10 to 30 pounds shall be suspended from the tension handle conditioned for not less than 1 hour to temperatures of minus 25° F., plus 75° F., and plus 125° F. Evidence of the pointer not indicating the weight within ½ pound at plus 75° F. and within 1 pound at minus 25° F. and plus 125° F. shall constitute failure of this test.

4.4 **Inspection of preparation for delivery.** The preservation, packaging, packing, and marking shall be examined and tested to determine compliance with section 5 of this specification.

5. PREPARATION FOR DELIVERY

5.1 **Preservation and packaging.** Preservation and packaging shall be level A or C as specified (see 6.2).

5.1.1 *Level A.* Each tension handle shall be preserved in accordance with Specification MIL-P-116, method IA-8.

5.1.2 *Level C.* The tension handle shall be preserved and packaged to afford protection against deterioration and damage.

5.2 **Packing.** Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 *Level A.* The preserved and packaged tension handles shall be packed in boxes conforming to Specification PPP-B-636, V3s or V3c, class 2, style optional, in quantities not to exceed the weight limitation of the box specification. After closure, all joints and seams of the boxes shall be covered with minimum 3-inch-wide tape conforming to Specification PPP-T-60, type III, class 1. The boxes shall be reinforced with bands of filament-reinforced tape in accordance with the appendix to the box specification.

5.2.3 *Level B.* The preserved and packaged tension handles shall be packed in boxes conforming to Specification PPP-B-636, type I or II, class 1, style optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:56Z
Check the source to verify that this is the current version before use.

5.2.3 *Level C.* The preserved and packaged tension handles shall be packed to insure carrier acceptance and safe arrival at destination at lowest rates in containers complying with Uniform Freight Classification Rules, National Motor Freight Classification Rules, or other carrier rules applicable to the mode of transportation.

5.3 **Marking.** Packages and shipping containers shall be marked in accordance with Standard MIL-STD-129.

6. NOTES

6.1 **Intended use.** The tension handle is intended to be used to measure tension on surveyor's tapes.

6.2 **Ordering data.** Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Administrative provisions for inspection records (see 4.1).

(c) Level of preservation and packaging and level of packing required (see 5.1 and 5.2).

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded, by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:
Army—CE
Navy—Docks
Air Force—MAA

Preparing activity:
Army—CE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:56Z
Check the source to verify that this is the current version before use.

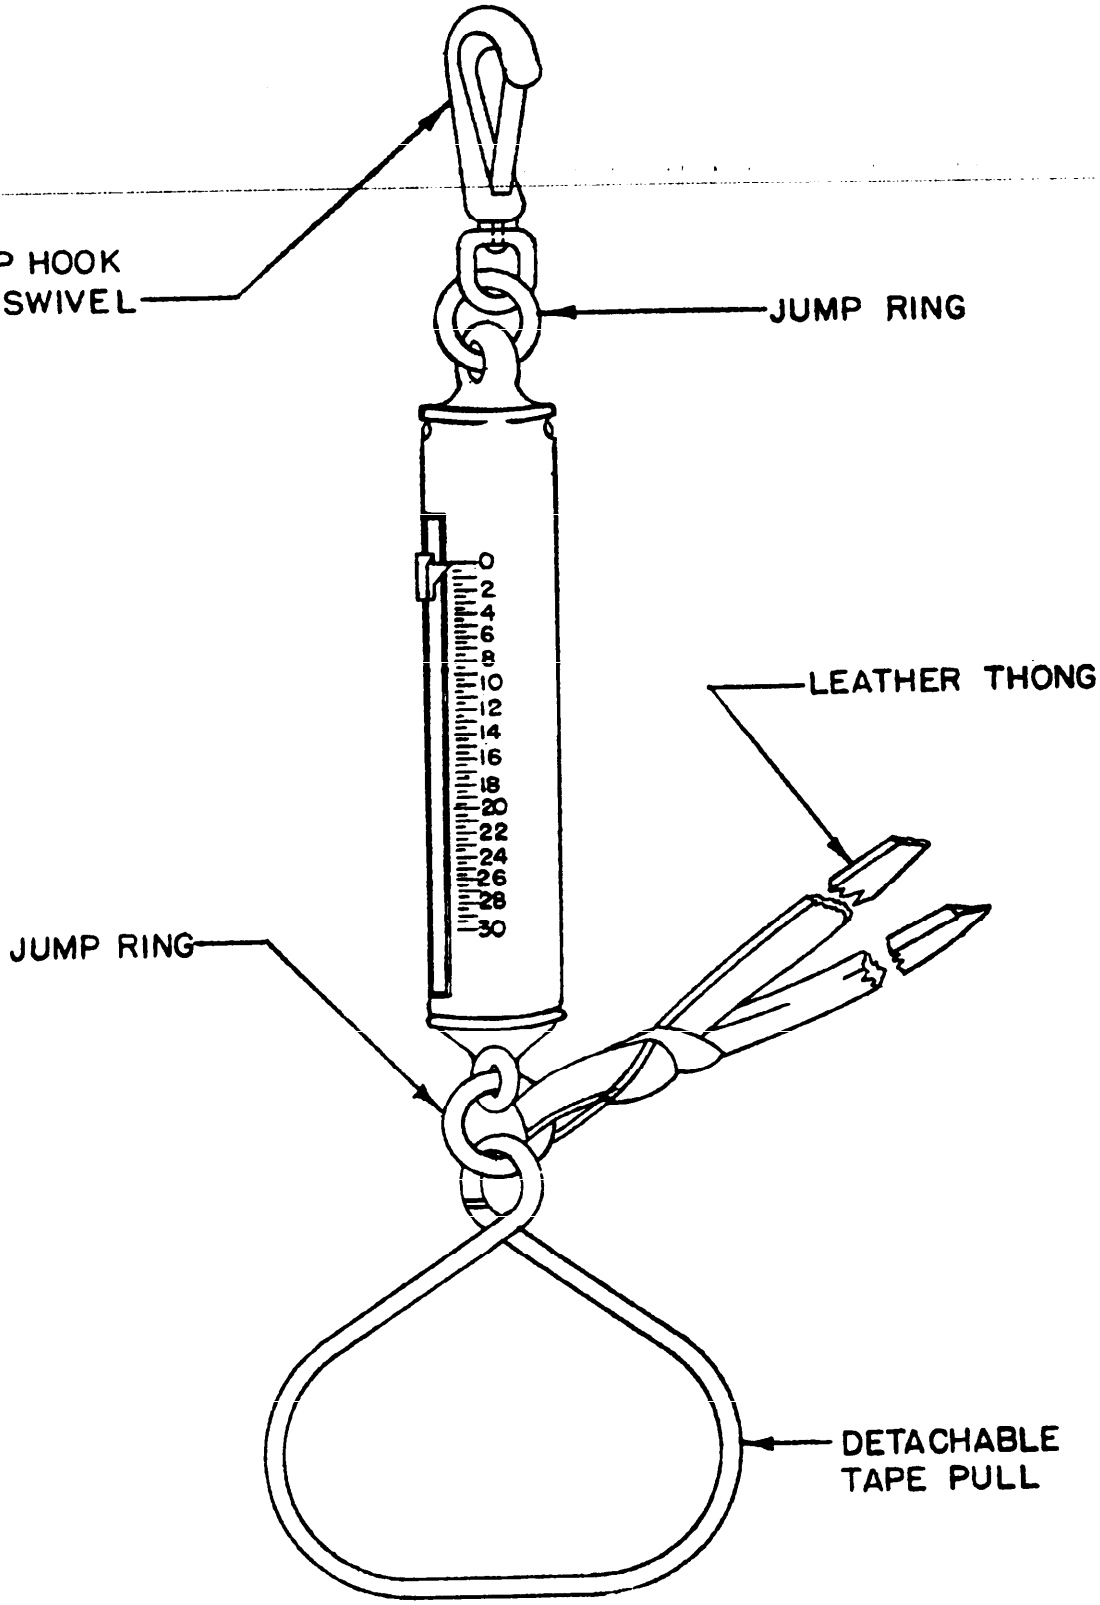


FIGURE 1. *Tension handle, steel measuring tape, surveyor's.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:56Z
Check the source to verify that this is the current version before use.