AA-W-001791a(GSA-FSS)
December 7, 1973
SUPERSEDING
AA-W-001791(GSA-FSS)
February 1, 1972

INTERIM FEDERAL SPECIFICATION

WARDROBES AND JANITOR'S CLOSET, WOOD, STEEL FRAME

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers various wardrobes and a janitor's closet of knockdown (KD) design.

1.2 Classification.

1.2.1 Types. Wardrobes, janitor's closet and accessory pieces shall be of the following types, classes and sizes as specified herein and as shown in applicable figures (see 6.1).

Type I - Wardrobes, center post frame type.

- Class 1 - Provincial traditional wardrobe, Knob on each door, decorative routing, (non-locking), 42 inches wide by 24 inches deep by 72 inches high.
- Class 2 - Wardrobe with two handles, (non-locking), 42 inches wide by 24 inches deep by 72 inches high.
- Class 3 - Wardrobe with one handle, (accommodates padlock), 42 inches wide by 24 inches deep by 72 inches high.

Type II - Janitor's closet with one handle, (accommodates padlock), 36 inches wide by 22 inches deep by 72 inches high.

Type III - Wardrobe, extruded aluminum trim (accommodates padlock).

- Size 1 - 30 inches wide by 24 inches deep by 72 inches high.
- Size 2 - 36 inches wide by 24 inches deep by 72 inches high.
- Size 3 - 42 inches wide by 24 inches deep by 72 inches high.

Type IV - Wardrobe, accommodates overchest and three drawer chest, (accommodates padlock), 46 inches wide by 26 inches deep by 80 inches high.

Type V - Accessory pieces for Type IV wardrobe.

- Class 1 - Overchest - 46 inches wide by 26 inches deep by 14 inches high.
- Class 2 - 3 drawer chest, 20-1/4 inches wide by 21-1/2 inches deep by 23 inches high.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

L-P-508	-	Plastic Sheet, Laminated, Decorative and Non-decorative.
NN-P-71	-	Pallets, Material Handling, Wood, Double Faced Stringer and Block Construction.
QQ-A-200/9	-	Aluminum Extrusions.
QQ-C-320	-	Chromium Plating (Electrodeposited).
QQ-S-781	-	Strapping, Steel, Flat and Seals.
LLL-B-810	-	Building Board, (Hardboard) Hard Pressed, Vegetable Fiber.
PPP-B-576	-	Boxes, Wood, Cleated, Veneer, Paper Overlaid.
PPP-B-585	-	Boxes, Wood, Wirebound.
PPP-B-591	-	Boxes, Fiberboard, Wood-cleated.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-640	-	Boxes, Fiberboard, Corrugated, Triple-Wall.
PPP-S-760	-	Strapping, Nonmetalic, (and Connectors).
PPP-T-42	-	Tape, Pressure-Sensitive Adhesive (General Packaging Application).

Federal Standards:

Fed. Test Method Std. No. 101	-	Preservation, Packaging, and Packing Materials: Test Procedures.
Fed. Test Method Std. No. 175	-	Adhesives: Methods of Testing.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, MO., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-1363	-	Measurement of Wood Moisture Content.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Department of Commerce Publications:

CS-236 - Mat-Formed Wood Particleboard.
PS-51 - Hardwood and Decorative Plywood.

(Copies of the Commercial Standards and Product Standards referenced above, which are Department of Commerce publications, may be obtained upon application, accompanied by money order, coupon, or cash, to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402. Prices may be obtained from the Superintendent of Documents.)

National Motor Freight Traffic Association, Incorporated, Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

American Iron and Steel Institute:

Steel Products Manual.

(Copies may be obtained from American Iron and Steel Institute, 150 East 42nd Street, New York, NY 10017.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished commodity and each component part shall be submitted or made ready for the contracting officer or his authorized representative to examine and test to determine compliance with this specification. Approval of the preproduction sample authorizes commencement of production, but does not relieve the contractor of responsibility from compliance with all other applicable provisions of this specification. Production units shall not vary from the approved preproduction sample in design or construction without written approval of the contracting officer.

3.2 Materials. Materials shall conform to the specified requirements of referenced specifications and standards, to the requirements specified herein, and on the applicable figures. Selection of materials not specifically defined shall be left to the discretion of the supplier.

3.2.1 Steel. The steel used to fabricate the frames and metal angles shall be cold rolled, cold rolled oiled, hot rolled pickled and oiled, or hot rolled annealed steel of commercial quality as defined in the Steel Products Manual. The steel shall be smooth, free from rust, scale, pits, scratches, laps, crimps, and buckles or other defects affecting strength or appearance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.2 Aluminum. The aluminum used in the fabrication of extrusions shall be alloy temper 6063-T5 of Federal Specifications QQ-A-200/9 and have a satin finish. All trim configurations are illustrated in figure 18.

3.2.3 Wood. All lumber used for drawer stock shall be uniformly dried without case hardening or honeycombing to a moisture content of 5 percent to 9 percent at time of fabrication as determined in accordance with MIL-STD-1363. The wood shall be sound and free from decay, pitch, shake wane or larvae channels, but may contain some stain or streaks, season checks or sound, tight knots of not over 1/4 inch in average diameter provided they are not in clusters.

3.2.3.1 Wood varieties and parts. Solid wood drawer parts shall be of one of the following species: Ash, Birch, Beech, Oak, Pecan, Hickory, Maple, and Hackberry.

3.2.3.2 Wood adhesive. Adhesive used in the construction of the three drawer chest shall be as follows: Any adhesive that will develop an average block shear strength of not less than 2800 pounds per square inch when tested as specified in 4.5.7.

3.2.4 Hardwood plywood. All hardwood plywood shall be constructed according to the requirements of Product Standard PS-51-71 and as specified herein. Bondage shall be not less than Type II. Face veneers and crossbanding shall be at least grade 2 and not less than 1/24 inch thick.

3.2.5 Hardboard. Hardboard shall be Type I standard, surface 1 or 2, finish A and thickness 1/4 inch as required in LLL-B-810.

3.2.6 Particleboard. The particleboard shall be in accordance with any of the following types, grades and classes in Commercial Standard CS 236:

Type I, grade A (high density), class 1;

Type I, grade B (medium density), class 2, except that panels less than one inch thick shall have a minimum average screw holding capacity of 235 pounds on the edges and 285 pounds on the faces;

Type II, grade A (high density), class 2

The thickness of the particleboard shall be as hereafter specified. The moisture content of the particleboard shall not exceed 9 percent at time of laminating.

3.2.7 Plastic laminate. (Except top on three drawer chest). Plastic laminate for use on furniture in this specification shall conform to specification L-P-508, style D, type II, grade HP, class 2. All vertical surfaces shall have a thickness of 0.032 plus/minus .004. The grain of wood grain plastic shall run in the direction of the longest dimension. The backing sheet shall be in accordance with Specification L-P-508, style ND, type V, grade HP and a minimum of 0.030 plus/minus 0.005 inches thick. The color and finish of the plastic laminate shall be as specified in the invitation.

3.2.7.1 Plastic laminate. (Three drawer chest, top). Plastic laminate used for the top shall be as in 3.2.7 except that it shall be type I, general purpose and have a thickness of 0.062 plus/minus .005.

3.2.7.2 Standard reference panel. A standard reference panel shall be used to determine the acceptability of the grain and color or color only (as applicable) of the plastic laminate (see 6.3).

3.2.8 Vinyl "Tee" molding. The vinyl "Tee" molding shall be of extruded design with grain and color as specified in the invitation to bid. The "Tee" mould may have a face overlay of polyester.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.9 Hardware.

3.2.9.1 Door handles and latching mechanisms.

3.2.9.1.1 Level type, locking. Shall have an integral padlock eye, and a satin chrome finish on die cast zinc, steel, brass or bronze. Alternatively, satin finish annodized aluminum may be used. Tensile strength of die cast zinc shall be not less than 30,000 p.s.i. Chromium plating shall be class 1 (decorative) and type II (satin) in accordance with QQ-C-320. The handles shall have spindles and sturdy latching plates which will provide single point latching behind the center post. The associated face hardware shall include a face plate fastened to the door with escutcheon pins and a padlock keeper fastened in place by a 1 inch 1/4 -20 carriage bolt plus an escutcheon pin (see 6.5).

3.2.9.1.2 Level type, non-locking. The handle shall be made of the same materials specified in 3.2.9.1.1 excluding the integral padlock eye (see 6.5). The same latching mechanism shall be used as indicated in 3.2.9.1.1.

3.2.9.1.3 Knob type, non-locking. Shall be a disc shaped provincial style knob, 1-1/4 inch diameter, which has an English antique finish (see 6.5).

3.2.9.2 Latching mechanism. Shall be the three-point type, controlled by the door handle and shall be capable of being activated manually with a minimum of effort. The mechanism shall engage the unit at the top (except for the type IV unit where it engages at the shelf), at the bottom, and at the approximate center of the left hand door. When doors are closed and the latching mechanism is engaged, the handle shall be in its vertical position. The retaining bar shall be not less than 3/8 inch diameter full hardened steel rod and must be at least 1/4 inch thick at points of engagement. The engagement at the top and bottom shall be 5/8 inch minimum. Each retaining bar shall operate through two rod guides, one secured as close to the top of the door for the upper bar and as close to the bottom of the door for the lower rod as practicable when handle is in open position and one at the rod middle. All four guides on each door shall be provided with molded polymer inserts to prevent metal-to-metal contact between the rod and guides thereby avoiding excessive rattle.

3.2.9.3 Hinges. Door hinges shall be steel, 0.072-inch thick, 5-Knuckle, tamper-proof institutional type. The pin shall be minimum 1/8 inch in diameter and shall be secured in some way to prevent removal. Both wings of the hinge shall be offset 90 degrees to permit mounting of hinge to the face and edge of the door, the end panel and frame member. When doors are closed, only a smooth rounded joint shall be exposed.

3.2.9.4 Magnetic catches. Magnetic catches shall have a pull of 6 - 8 pounds and may have either an aluminum or plastic case (see 6.5).

3.2.9.5 Elbow catch and strike. The elbow catch (shown in figure 18) shall be steel or brass, with a dull nickel or cadmium plating. The head of the elbow catch lever shall be not less than 1/4-inch deep to provide positive, secure latching of the door. The elbow catch and steel strike shall be fabricated as shown in figure 18.

3.2.9.6 Towel bar. Towel bar shall be minimum 5/8-inch diameter chrome plated steel tubing with chrome plated brackets. The tube shall be a minimum of 16 inches long. Alternatively, the steel tubing may be another cross sectional shape provided the dimensions are approximately the same.

3.2.9.7 Mirror. Acrylic, non-breakable, 60 inches long by 14 inches wide (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.9.8 Shelf standards and supports. Shall be of cold rolled steel having a cadmium finish. Alternatively, it may be made of annodized aluminum. The standards shall be of the surface mounting type, 5/8 inch wide and a minimum of 24 inches long. They shall have 1/2 inch adjustments on the length dimension and shall be numbered every inch.

3.2.9.9 Clamps, spring, utility. Four, spring loaded, single claw clamps shall be tandem mounted on a 12 inch long metal back bar. The clamps shall slide along the back bar to allow spacing adjustment between clamps (see 6.5).

3.2.9.10 Glides. Adjustable glides mounted to tee nuts in the wood blocks attached to the toe board shall be of plastic with a 1/4-20 threaded steel stem. A nail type plastic glide, 5/8 inch minimum diameter, shall be on the lower rear of each end panel.

3.2.9.11 Clothes rod. Shall be a minimum 1-1/4 inch diameter, a minimum of 22 gauge (0.0299) tubing of the steel specified in 3.3.1 and plated in a bright or satin chrome. Two ring brackets, chrome, cadmium, or zinc plated, and six #6 by 5/8 sheet metal screws shall be furnished with each clothes rod. The finish of the clothes rod and associated hardware must be compatible within the limit of the base metal.

3.2.9.12 Metal angles. Shall be 7/8 inch by 7/8 inch formed steel angle of the steel specified in 3.2.1 with a minimum thickness of 16 gage. All metal angles shall have three evenly spaced holes along each flange.

3.2.9.13 Drawer suspensions. Drawer suspensions shall be "two way" and be capable of supporting a minimum load of 50 pounds (see 6.5).

3.2.9.14 Drawer pulls. Shall be made of aluminum as specified in 3.2.2. They shall be full width and have a configuration as illustrated in figure 18.

3.2.9.15 Coat and hat hook. Shall be of the two prong type with the upper prong being the larger and shall be made of die cast zinc, brass or bronze with a chrome plating. Alternatively, it may be made of aluminum with an annodized and lacquer finish.

3.3 Construction of wardrobes and janitor's closet.

3.3.1 Design. The appearance of the units and the arrangements of interior components shall be as shown in the applicable figures. The units shall be of the knockdown type (KD) which can be readily assembled without the use of special tools.

3.3.2 Fabrication. Suitable jigs and fixtures shall be used in fabrication to insure accurate fit and easy assembly of wardrobe components. Pre-drilled lead holes shall be provided as necessary for the ready location and assembly of all components.

3.3.3 Assembly. The front frame shall be shipped with the doors attached. The rear frame shall be shipped with the back attached. The end panels, top, bottom, toe board, shelving and most hardware shall be shipped knockdown. Great care shall be exercised to include all components and hardware needed to assemble each unit properly. Mechanical fasteners, such as nuts, bolts, washers, etc., shall be grouped and packaged by size and identified in the same way as in the instruction sheet, for ease of assembly.

3.3.3.1 Assembly instruction sheet. The manufacturer shall prepare an instruction sheet with simple illustrated assembly directions. It shall be available for use and approval at the time of the preproduction inspection. The approved assembly instruction sheet for the wardrobe or janitor's closet shall be packaged with each unit and attached to one of the major components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.4 Overall dimensions. The overall dimensions (exclusive of face hardware) of the units shall be the applicable sizes specified in 1.2.1.

3.3.5 Tolerances. Tolerances in overall dimensions shall be plus 1/8 inch and minus 1/4 inch in height, width and depth. Fabrication of the components shall be accurate, with component tolerances maintained that provide a tight fit, and a rigid unit.

3.3.6 Steel frame assemblies. All frame members shall be 1 inch by 1 inch formed or rolled steel angle of the steel specified in 3.2.1 with a minimum thickness of 12 gage (0.1046). All joints shall be continuously fusion welded (see 6.4.1). Outer dimensions of the frames shall be proportional to the units size indicated in 1.2.1. See following paragraphs for specific requirements on particular frames.

3.3.6.1 Rear frame assemblies. Shall be as specified in the following paragraphs.

3.3.6.1.1 Type I (all classes). The frame shall consist of two vertical and three horizontal members. The three horizontal members shall be welded to the front face of the flange of the two vertical members of the rear frame as shown in figure 12. The opening between the top frame member and the shelf supporting member shall be 8-1/4 inches (see figure 12). The frame members shall be punched with holes in the sizes and positions indicated in figure 12. Holes shall also be punched in the frame as needed for securing the back panel to the frame (see 3.3.9). An alternative construction shall allow the two vertical frame members to extend 3/4 inch above the top horizontal frame member.

3.3.6.1.2 Type II. The frame shall be as specified in 3.3.6.1.1 with the following exception: The middle horizontal frame member shall be eliminated (see figure 13).

3.3.6.1.3 Type III. The frame shall be as specified in 3.3.6.1.2 (see figure 13).

3.3.6.1.4 Type IV. The frame shall be as specified in 3.3.6.1.1 with the following exceptions: The spacing between the holes on the two vertical frame members shall be 23-1/2 inches rather than 21 inches, and the opening between the top frame member and the shelf supporting member shall be 11 inches rather than 8-1/4 inches.

3.3.6.2 Front frame assemblies. Front frame assemblies shall be as specified in the following paragraphs.

3.3.6.2.1 Type I (all). The frame shall be as specified in 3.3.6.1.1 except in the following areas: A rectangular steel tube, 3/8 inch deep by a minimum of 2 inches wide and 69 inches long shall be welded to the front face of the horizontal members of the front frame. The tube shall be a minimum of 16 gage. Alternatively, the tube may be formed by two intermembering channels with the rear channel snugly inset in the front channel, and tack welded on not less than 12 inch centers on both sides of the formed tube. It shall be centered on the front frame and act as a stop for the doors and a latching point for the handles (see figure 14).

3.3.6.2.2 Type II. The frame shall be as specified in 3.3.6.1.2 with the following exception: Two rubber bumpers shall be securely attached by the manufacturer to the top frame member to act as cushions for the doors when they are closed (see figure 13).

3.3.6.2.3 Type III. The frame shall be as specified in 3.3.6.2.2.

3.3.6.2.4 Type IV. The front frame shall be the same as the rear frame specified in 3.3.6.1.1 with the following exception: Two rubber bumpers shall be securely attached by the manufacturer to the shelf support frame member to act as cushions for the doors when they are closed (see figure 15).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.7 End panel. End panels shall be 3/4 inch particleboard as specified in 3.2.6. All panels shall be bored on the inside face to receive 8 metal inserts with internal and external threads (4 along front, and 4 along rear vertical edges of panels). The bored holes shall not penetrate the exterior face of the panels. Eight Machine screws (1/2 to 5/8 inch long, 1/4-20) and lock washers shall be furnished to fasten end panels to the front and rear steel frames. Inserts shall align with the punched holes in the frames (see 3.3.6.1.1). End panels, including trim or molding, shall be flush with the door fronts when the unit is assembled. Clothes rods and ring brackets (3.2.9.11) shall be supplied with all units except the type II janitor's closet. Lead holes shall be drilled to allow easy mounting of these ring brackets, 2 inches down from the shelf or top, as applicable, and centered on the end panels. "Tee" molding (3.2.8) shall be securely attached to the front edge of the end panels on all units except type III. See following applicable paragraphs for specific requirements on particular end panels.

3.3.7.1 Type I, all classes. End panels shall be constructed as specified in 3.3.7 (see figure 16).

3.3.7.1.1 Type I, class 1. End panels shall be constructed as specified in 3.3.7 with the following modification: End panels shall be routed as shown in figure 1. The routing shall be blackened using a flat paint or stain.

3.3.7.2 Type II. End panels shall be constructed as specified in 3.3.7 with the following modifications: Lead holes shall be drilled to allow easy mounting of the metal angles that will support the two permanent shelves (see 3.3.12.2). Two adjustable shelf standards (3.2.9.8), spaced 17 inches apart and centered between the two permanent shelves, shall be mounted securely by the manufacturer to the right end panel (see 3.3.12.2). Lead holes shall be drilled in the left end panel to allow easy mounting of the spring clamps (3.2.9.9) centered on the end panel, 10 inches down from the ceiling of the closet. The end panels shall be notched on the lower front corner (see figures 6, 7, 16, and 17).

3.3.7.3 Type III. End panels shall be constructed as specified in 3.3.7 with the following modifications: Aluminum trim (3.2.2) shall be securely attached with no visible fasteners, to the front and rear edge of the end panels. Lead holes shall be drilled in the right end panel to allow easy mounting of the metal angle that will support the shelf (see 3.3.12.3) (see figures 16, and 18).

3.3.7.4 Type IV. End panels shall be constructed as specified in 3.3.7 with the following modification: End panels shall be notched at the lower front corner as shown in figure 17.

3.3.8 Doors. Shall be 3/4 inch particleboard as specified in 3.2.6. The hinged edges shall be routed on 4 inch centers from the top and bottom and in the center to receive three hinges (3.2.9.3). Specific hinge lengths are specified in the following paragraphs. Doors shall be bored to receive appropriate handles and latching mechanisms as specified for each particular unit. The manufacturer shall mount the doors to the hinges a minimum 1/16 inch, maximum 1/8 inch from the end panels when the wardrobe is assembled. The gap between the doors shall be a minimum of 1/8 inch, maximum 3/16 inch (see 4.5.6). See the following applicable paragraphs for specific requirements on particular doors.

3.3.8.1 Type I (all classes). Doors shall be constructed as specified in 3.3.8 with the following modifications: "Tee" molding (3.2.8) shall be securely attached to the free vertical edge of both doors. The top edge of the doors shall be flush with the top of the wardrobe. Three hinges shall be fastened to each vertical member of the front frame. The hinges shall be a minimum of 2 inches long. One wing of each hinge shall be fastened to the door with a minimum of 4 sheet metal type #8 by 5/8 screws. The other wing of each hinge shall be continuously fusion welded (see 6.4.1) (minimum 1/2 inch on each edge) to the face of the steel frame and fastened to the end panel with a minimum of 1 sheet metal type #8 by 5/8 screw. Alternatively, in lieu of welding, each hinge shall be riveted to the face of the steel frame with a minimum of 3 solid rivets. Hinges shall be finished in same manner as frame if welded to the frame, or otherwise shall have zinc or cadmium plating to match handle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.8.2 Type I, class 1. Doors shall be constructed as specified in 3.3.8 with the following modifications: Two knobs (3.2.9.13), shall be supplied for easy mounting on the doors as shown in Figure 1. Doors shall be routed as shown in Figure 1. The routing shall be blackened using a flat paint or stain. Steel strikes shall be securely attached to the doors as shown in Figure 2 being sure that the strikes properly align with the magnetic catches when the wardrobe is assembled.

3.3.8.3 Type I, class 2. Doors shall be constructed as specified in 3.3.8 with the following modifications. Two level-type, non-locking, handles and associated latching mechanism and hardware (3.2.9.1.2) shall be supplied for easy mounting on the doors as shown in figures 3 and 5. The latching mechanism is the single point type that latches securely behind the center post. Care shall be taken to ensure that the latching mechanism will work properly when the wardrobe is assembled.

3.3.8.4 Type I, class 3. Doors shall be constructed as specified in 3.3.8 with the following modifications: A level-type handle and associated latching mechanism and hardware (3.2.9.1.1) shall be supplied for easy mounting on the doors as shown in figures 4 and 5. The latching mechanism is the single point type that latches securely behind the center post. The latching mechanism will work properly when the wardrobe is assembled. The inactive (left) door shall have a steel strip 1-1/2 inches by 68 inches (16 gage), mounted by the manufacturer, approximately 1/2 inch from the top edge and projecting 1/2 inch toward the right door. This strip shall hold the left door closed securely when the right door is latched. The steel strip shall have a 1/2 inch radius on the top and bottom exposed corners and shall be fastened to the doors by the manufacturer with a minimum of nine #8 by 5/8 inch flat head sheet metal screws. The top and bottom screws shall be a maximum of 2 inches from the end of the strip with the balance evenly spaced.

3.3.8.5 Type II, III, and IV. Doors shall be constructed as specified in 3.3.8 with the following modifications: The door shall be supplied with the same hardware as specified in 3.3.8.4 except that a 3 point latching mechanism as specified in 3.2.9.2 shall be used in place of the single point latching mechanism. The three point latching mechanism shall be mounted by the manufacturer (see figures 6, 8, and 10). Some means shall be used to keep the three point latching mechanism intact on the door before the handle is mounted, when the unit is assembled. The 3 point latching mechanism shall work properly, smoothly and quietly when the unit is assembled. A "tee" shaped, extruded aluminum strip (see figure 18) shall be securely attached by the manufacturer to the right door as shown in figures 6, 8, and 10. Three hinges shall be fastened to each vertical member of the front frame. The hinges shall be as specified in 3.2.9.3 and shall be a minimum of 2-1/2 inches long. One wing of each hinge shall be fastened to the door with a minimum of 4 sheet metal type #8 by 5/8 screws. The other wing of each hinge shall be continuously fusion welded (see 6.4.1) (minimum 1/2 inch on each edge) to the face of the steel frame and fastened to the end panel with a minimum of 2 sheet metal type #8 by 5/8 screws. Alternatively, in lieu of welding, each hinge shall be riveted to the face of the steel frame with a minimum of 3 solid rivets. Hinges shall be finished in same manner as frame if welded to the frame, or otherwise shall have zinc or cadmium plating to match handle.

3.3.8.6 Type IV. In addition to the above, the following requirements are applicable to the Type IV. A towel bar (3.2.9.6), coat and hat hook (3.2.9.15) and a mirror (3.2.9.7) shall be provided with each wardrobe. Lead holes shall be drilled to allow easy mounting of the towel rack, centered on the inside of the left door, four feet above floor level, and the coat and hat hook centered on the inside of the left door, 5 inches down from the top of the door. The mirror shall be mounted by the manufacturer on the inside of the right door with the top of the mirror 5 inches down from the top of the door (see figure 10).

3.3.9 Back. Back panels for the various units shall be as specified in the following applicable paragraphs.

3.3.9.1 Type I (all classes). The back shall be 1/4 inch hardboard as specified in 3.2.5. The manufacturer shall securely attach the back to the rear frame using rivets. No sharp fasteners shall protrude from either side of the back when mounted.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T11:41Z
Check the source to verify that this is the currentversion before use.

3.3.9.2 Type II, Type IV. The back shall be 1/2 inch particleboard (3.2.6). The manufacturer shall securely attach the back to the rear frame using 1/2 inch #10 screws. No fasteners shall be visible from the rear of the unit. Lead holes shall be drilled in the back of the Type II janitor's closet as specified in 3.3.12.2.

3.3.9.3 Type III. The back shall be 1/2 inch particleboard (3.2.6). The manufacturer shall securely attach the back to the rear frame using screws or rivets. No sharp fasteners shall protrude from either side of the back when mounted. Clearance holes shall be drilled through the back as specified in 3.3.12.3.

3.3.10 Top. Shall be 3/4 inch particleboard as specified in 3.2.6. "Tee" moulding (3.2.8) shall be securely attached to the front edge of the top panel on all units except Type III. Three lead holes shall be drilled along the front and back edges of each panel. These holes shall align with the punched holes in the frames as shown in figures 12 through 15. Six 3/4 inch, #10 sheet metal screws shall be furnished to fasten this panel to the frames. Notches shall be permitted to allow standard production of the top, shelf, and bottom panels on the applicable units. Tops for various units shall be as specified in the following applicable paragraphs.

3.3.10.1 Type I (all classes). The top shall be as specified in 3.3.10 with the following modification: The front edge of the top panel, including "Tee" molding, shall be flush with the top horizontal member of the front frame when the wardrobe is assembled (see figure 5).

3.3.10.2 Type II. The top shall be as specified in 3.3.10 with the following modifications: The front edge of the top panel, including "Tee" molding, shall be flush with the door fronts when the janitor's closet is assembled. Three lead holes shall be drilled in the top to receive the screws for the 16 inch long metal angle as specified in 3.2.9.12 (see figure 7).

3.3.10.3 Type III. The top shall be as specified in 3.3.10 with the following modifications: Aluminum trim (3.2.2) shall be securely attached to the front edge of the top panel without visible fasteners. The front edge of the top panel, including trim shall be flush with the door fronts when the wardrobe is assembled. Lead holes shall be drilled through the top to receive screws as specified in 3.3.12.3 (see figure 9).

3.3.10.4 Type IV. The top shall be as specified in 3.3.10 with the following modifications: The front edge of the top panel including "Tee" molding, shall be flush with the door fronts when the wardrobe is assembled. A mounting hole of correct shape, dimension and position (see figure 19) shall be bored to receive the latch for the overchest (3.2.9.5). Great care shall be taken to see that the mounting hole is positioned such that when a latch is mounted it will align with the strike plate mounted on the overchest door. Lead holes shall be drilled for the screws used for attaching the latch to the panel. This latch shall be provided with the overchest. A metal plate (16 gage) shall be securely attached, with screws, over the mounting hole. The plate shall be on the inside of the wardrobe when the unit is assembled. Six lead holes, to align with the holes on the two bottom flanges of the overchest frames (see figure 11) shall be drilled in the top.

3.3.11 Bottom. Shall be 3/4 inch particleboard as specified in 3.2.6. "Tee" molding (3.2.8) shall be securely attached to the front edge of the bottom panel on all units except Type III. A hole of adequate depth and width shall be bored in the bottom panel, of all units except Type I (all classes), to receive latching bar (3.2.9.2) of door-latching mechanism. The front and rear corners shall be notched to receive the vertical flanges of the front and rear frame members. Three lead holes shall be drilled along the front and back edges of each panel. These holes shall align with the punched holes in the frames as shown in figures 12 through 15. Six 3/4 inch, #10 sheet metal screws shall be furnished to fasten these panels to the frames. A 1-1/2 inch long, metal angle (3.2.9.12) shall act as a bottom stop for the left door on the Type II, III and IV units (see figures 7, 9, and 11). Exposed edges of the stop shall be rounded and one rubber bumper shall be attached to the upright flange. Two 3/4 inch #10 sheet metal screws shall be used for fastening the angle to the bottom. Two lead holes shall be drilled in the bottom to receive the door stop. See the following applicable paragraphs for specific requirements on particular bottom panels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.11.1 Type I (all classes). The bottom shall be as specified in 3.3.11 with the following modification: The front edge of the bottom panel, including "Tee" molding, shall be flush with the bottom horizontal member of the front frame when the wardrobe is assembled (see figure 5). Lead holes shall be drilled in the bottom panel of the Type I, class 1 wardrobe to allow easy mounting of the magnetic catches (3.2.9.4) as shown in figure 2. The catches shall align properly with the strike plates when the unit is assembled.

3.3.11.2 Type II. The bottom shall be as specified in 3.3.11 with the following modifications: The front edge of the bottom panel, including "Tee" molding, shall be flush with the door fronts when the janitor's closet is assembled. Three lead holes shall be drilled in the bottom to receive the screws for the metal angles as specified in 3.3.12.2 (see figure 7).

3.3.11.3 Type III. The bottom shall be as specified in 3.3.11 with the following modifications: Aluminum trim (3.2.2) shall be securely attached to the front edge of the bottom panel. The front edge of the bottom panel, including trim, shall be flush with the door fronts when the wardrobe is assembled (see figure 9).

3.3.11.4 Type IV. The bottom shall be as specified in 3.3.11 with the following modification: The front edge of the bottom panel, including "Tee" molding, shall be flush with the door fronts when the wardrobe is assembled (see figure 11).

3.3.12 Shelves and partition panel. The shelves and partition panel shall be 3/4 inch particleboard (3.2.6). Lead holes shall be drilled in the panels and shelves where needed to allow easy assembly of the unit. Number 10 sheet metal screws of appropriate length shall be furnished for all fastening requirements unless otherwise noted. Shelves for the various units shall be as specified in the following, applicable paragraphs.

3.3.12.1 Type I (all classes). The shelf shall be as specified in 3.3.12 with the following modifications: "Tee" molding shall be securely attached to the front edge of the shelf by the manufacturer. The front and rear corners shall be notched to receive the vertical flanges of the front and rear frame members (see figure 5). The lead holes, drilled along the front and back edges of the shelf shall align with the punched holes in the frames as shown in figure 10. Lead holes shall be drilled in the shelf of the Type I, class 1 wardrobe to allow easy mounting of the magnetic catches (3.2.9.4) as shown in figure 2. The catches shall align properly with the strike plates when the unit is assembled.

3.3.12.2 Type II. The shelves and partition panels shall be as specified in 3.3.12 with the following modifications: The interior of the janitor's closet shall have a central partition, two permanent and two adjustable shelves and two spring clamp units (3.2.9.9) as shown in figures 6 and 7. Eight metal angles, 16 inches long, (3.2.9.12) shall be used for securing the partition and the two permanent shelves in place. Each metal angle shall be attached by the manufacturer to either one of the two parts the angle will join together. Two adjustable shelf standards (3.2.9.8) spaced 17 inches apart and centered between the two permanent shelves, shall be securely attached by the manufacturer to the right side of the partition panel (see 3.3.7.2). The slots of all four adjustable shelf standards shall be on the same plane when the unit is assembled. The partition panel and shelves shall be notched in the corners to ensure a close fit against the top, bottom, back and side of the janitor's closet. "Tee" molding shall be securely attached to the front edge of all shelves and the partition panel by the manufacturer.

3.3.12.3 Type III. The shelf shall be as specified in 3.3.12 with the following modifications: The interior of the wardrobe shall have one shelf unit consisting of a shelf panel and an upright panel as shown in Figure 8. Three 1-1/2 inch #10 screws shall be used for each of the following attachments, upright panel to the top panel,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

upright panel to the back panel. One, 12 inch long metal angle, as specified in 3.2.9.12, shall be used for each of the following attachments, the shelf panel to the upright panel and the end panel. These two angles shall be attached to the shelf by the manufacturer. The front edges of the shelf and upright panel shall be filled and painted the same color as the frame.

3.3.12.4 Type IV. The shelf shall be the same as specified in 3.3.12.1 and as shown in figure 11.

3.3.13 Toeboard. The toeboard shall be 3/4 inch particleboard as specified in 3.2.6. It shall be 3-7/8 inches wide and have a length as required to extend from the inside of the left end panel to the inside of the right end panel. Wood blocks approximately 1-1/2 by 1-1/2 by 3-1/4 inches shall be screwed and glued to the back of the toeboard at each end, flush with the top edge and ends. One Tee nut shall be installed by the manufacturer in each of the wood blocks for mounting to the adjustable glides. Clearance holes shall be bored to allow the glides to be screwed in fully. Each end of the toeboard shall be attached to the end panels with two, 2-1/4 inch #10 screws. Lead holes shall be provided for easy installation of the toeboard.

3.4 Construction of the three drawer chest.

3.4.1 Design. The appearance of the chest shall be as shown in figure 10. This chest is intended to be used either as a free standing night stand or in the Type IV wardrobe.

3.4.2 Assembly. The units shall be shipped completely assembled by the manufacturer.

3.4.3 Overall dimensions. 20-1/4 inches wide by 23 inches high by 21-1/2 inches deep.

3.4.4 Tolerances. The following tolerances will be permitted, except where otherwise indicated in the detailed specification.

3.4.4.1 Overall tolerances. Tolerances in overall dimensions shall be plus or minus 1/8 inch.

3.4.4.2 Component part tolerances.

(a) Solid wood dimensions - plus 1/16 or minus 1/32 inch.
(b) Plywood and particleboard dimensions:
Thickness - plus 1/16 inch or minus 1/32 inch.
All other - plus 1/16 inch or minus 1/32 inch.
(c) Any dimension not otherwise specified - plus or minus 1/16 inch.

3.4.5 Panels. Shall be particleboard as specified in 3.2.6 and shall be finished as specified in 3.2.7 and 3.2.7.1.

3.4.6 Panel thicknesses.

Component	Thickness (minimum)
Top	3/4 inch
Toeboard	3/4 inch
Bottom	5/8 inch
End panel	5/8 inch
Back	1/2 inch

3.4.7 Drawer fronts. Shall be either 3/4 inch hardwood plywood as specified in 3.2.4 or 3/4 inch particleboard as specified in 3.2.6. Top edge of the drawer front shall be covered with a full width aluminum pull or aluminum molding as shown in Figure 18.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.4.8 Drawer sides, back and bottom. Sides shall be not less than 7/16 inch hardwood as specified in 3.2.3.1 with a 1/4 inch plywood bottom as specified in 3.2.4. Drawer sides shall be joined to the front and back with glued and driven (French) dovetails. The drawer bottom shall be reinforced with not less than six glue blocks rubbed in place. Glue used for all joints shall be as specified in 3.2.3.2. All drawers shall be equipped with drawer suspensions as specified in 3.2.9.13. Clearance of 1/8 inch (plus 0, minus 1/32 inch) shall be provided around each drawer.

3.4.9 Case. The five components listed in 3.4.5 shall be carefully assembled using metal angles as specified in 3.2.9.12. The top, both end panels, and toeboard shall be laminated as specified in 3.2.7 and 3.2.7.1. Tee molding (3.2.8) shall be securely attached to the front edge of both end panels. Drawer suspensions as specified in 3.2.9.13 shall be securely installed on the inside of the case.

3.5 Construction of the overchest.

3.5.1 Design. The appearance of the overchest shall be as shown in figures 10 and 11. This overchest is intended to be used on the top of the Type IV wardrobe as shown in figure 10. The overchest shall have the capability of being attached to the top of the Type IV wardrobe using six 3/4 inch #10 sheet metal screws fastened through the lower flange of the front and rear frame as indicated in figure 11. The overchest shall be the knockdown type (KD) which can be readily assembled without the use of special tools.

3.5.2 Fabrication. Suitable jigs and fixtures shall be used in fabrication to insure accurate fit and easy assembly of overchest components. Pre-drilled lead holes shall be provided as necessary for the location and assembly of all components. Great care shall be taken to insure accurate fit and alignment between the overchest and Type IV wardrobe when the two units are assembled. The space between the two units when they are joined shall not exceed 1/16 inch.

3.5.3 Assembly. The front frame shall be shipped with the door attached. The rear frame shall be shipped with the back attached. The end panels, top and part of the elbow latch mechanism shall be shipped knockdown. All components and hardware needed to assemble each unit properly shall be included. Mechanical fasteners such as nuts, bolts, washers, etc., shall be grouped and packaged by size and identified in the same way as in the instruction sheet, for ease of assembly.

3.5.3.1 Assembly instruction sheet. The manufacturer shall prepare an instruction sheet with simple illustrated assembly directions. It shall be available for use and approval at the time of the preproduction inspection. The approved assembly instruction sheet for the overchest shall be packaged with each unit and attached to one of the major components.

3.5.4 Overall dimensions. The overall dimensions of the overchest shall be as specified in 1.2.1 under Type V, class 1.

3.5.5 Tolerances. (See 3.3.5).

3.5.6 Steel frame assemblies. (See 3.3.6).

3.5.7 Front and rear frame assemblies. The frames shall consist of two horizontal and two vertical members as shown in figure 11. The two horizontal members shall be welded to the front face of the flange of the two vertical members. The frame members shall be punched with holes and slots in the sizes and positions indicated in figures 10 and 11. Holes shall also be punched as needed for securing the back panel to the frame and for installing the hinges. Dimensions of the frame shall be proportional to the units size indicated in 1.2.1. An alternative construction shall allow the four vertical frame members of the front and rear frames to extend 3/4 inch above the top horizontal frame member.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

3.5.8 End panels. The end panels shall be 3/4 inch particleboard as specified in 3.2.6. Three lead holes shall be drilled along the front and back edges of each panel to allow easy attachment of the end panels to the frame. Four 3/4 inch #10 sheet metal screws shall be furnished for fastening each panel to the frames. "Tee" molding (3.2.9) shall be securely attached to the front edge of the end panels. End panels, including molding, shall be flush with the door front when the unit is assembled.

3.5.9 Door. The door shall be 3/4 inch particleboard as specified in 3.2.6. The hinged edges shall be routed on 4 inch centers from the left and right end of the door to receive two hinges (3.2.9.3). A strike plate, mating with the elbow latch (3.2.9.5) shall be securely fastened to the door by the manufacturer in such a way that it will align with the elbow latch when the overchest and Type IV wardrobe are intermembered (see figure 18). The elbow latch and mounting screws shall be provided with the overchest. The manufacturer shall mount the door to the hinges a minimum 1/16 inch, maximum 1/8 inch from the end and top panels when the overchest is assembled. "Tee" molding (3.2.8) shall be securely attached to the three free edges of the door.

3.5.10 Top. The top shall be 3/4 inch particleboard as specified in 3.2.6. "Tee" molding (3.2.8) shall be securely attached to the front edge of the top panel. Three lead holes shall be drilled along the front and back edges of each panel to allow easy attachment of the top to the frame. Six 3/4 inch #10 sheet metal screws shall be furnished to fasten this panel to the frames. Notches as required on the bottom and shelf panel of the Type IV wardrobe shall be allowed on the top panel to permit standard production of these panels. The front edge of the top panel, including "Tee" molding, shall be flush with the door front when the overchest is assembled.

3.5.11 Back. The back shall be 1/2 inch particleboard (3.2.6). The manufacturer shall securely attach the back to the rear frame using 1/2 inch, #10 screws. No fasteners shall be visible from the rear of the unit.

3.6 Finish, particleboard, plywood (all units). "Tee" molding shall be used where indicated within this specification. Panels including edges not faced with a laminate or "Tee" molding shall be finished and sealed on all surfaces. The sealed surfaces shall blend with the exterior of the wardrobe. A laminate as specified in 3.2.7 and 3.2.7.1 shall be securely applied to the components as shown in Table I. Sharp edges on finished panels shall be "eased".

3.7 Finish, metal (all units). Welded frames shall be cleaned of foreign matter and weld spatter, bonderized or primed, and completely coated with an enamel and baked. The color of the enamel shall blend with the exterior of the wardrobe. Steel angles and door strip shall have the same finish and preparation as the welded frames.

3.8 Identification marking. Each item shall be permanently and legibly marked in an inconspicuous place with the specification number, Federal Stock Number, contract number, date of manufacture and the manufacturer's name or trade mark, so that the source of supply may be readily determined.

3.9 Workmanship. A high degree of craftsmanship shall be exercised while performing the various operations of manufacture to eliminate the possibility of personal injury due to burrs and sharp edges or corners. Components shall be neatly and accurately trimmed and the laminate shall not be broken. The laminate shall be factory applied, providing a tight, uniform bond without wrinkles, blisters, breaks, cuts or embedded foreign matter. Cuts or scratches (breaking of the laminate layer) will not be permitted. Surface preparation of the particleboard shall be suitable for subsequent application of the plastic laminate.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE I. Laminate style on Panel Faces*

	Component	Exterior	Interior
Type I (all classes)	Doors	D	D
	End panels	D	ND
	Toe board	D	ND
	Top	None	None
	Bottom	None	None
	Back	None	None
Type II	Doors	D	D
	End panels	D	D
	Toe board	D	ND
	Top	ND	D
	Bottom	ND	D
	Back	D	D
	Central partition	D (both faces)	
	Shelves	D (both faces)	
Type III	Doors	D	D
	End panels	D	ND
	Toe board	D	ND
	Top	None	None
	Bottom	None	None
	Back	None	None
Type IV	Doors	D	D
	End panels	D	ND
	Toe board	D	ND
	Top	None	None
	Bottom	None	None
	Back	D	ND
Type V (class 1)	Door	D	D
	End panel	D	ND
	Top	None	None
	Back	D	ND
Type V (class 2)	Drawer faces	D	ND
	Top	D self-edge	ND
	End panels	D	ND
	Toe board	D	ND
	Bottom	None	None
	Back	None	None

* D - Decorative
ND - Non-decorative

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. Examination and testing of the preproduction sample shall be made on a completely fabricated item for all provisions of this specification applicable to end product examination and tests before regular production is started.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with MIL-STD-105 except where otherwise specified herein.

4.3.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the specified requirement of referenced subsidiary specifications and standards, or if none, in accordance with this specification.

4.3.2 Inspection of end item. The lot shall be all units of the same type offered for inspection at one time. The sample shall be one completely assembled unit or one unit ready for assembly as applicable.

4.3.2.1 Visual examination, assembled wardrobes. The assembled wardrobes shall be examined for defects as specified in Tables II and VI.

TABLE II. Classification of defects

Examine	Defect	Classification Major	Minor
Material	Aluminum or steel components not of material or gage specified.		X
	Species of wood in any wood component not of material or size specified.		X
	Particleboard not of material or size specified.		X
Laminated plastic	Not material specified.		X
	Face or backing sheet missing.	X	
	Poor adhesion, i.e. blistered, peeled, wrinkled, broken, cut, scratched or marred.	X	
	Face sheet damaged, dented, cracked, marred, or discolored.		X
	Scratch or nicks in face sheet affecting appearance.		X
	Wrong color or grain.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4.3.2.2 Examination of assembly (excluding Type V, class 1). Units unassembled for knocked-down shipment shall be selected from each inspection lot, assembled and examined in accordance with the defects specified in Table III. Components comprising a single unit shall be selected and a wardrobe assembled from each lot of 100 or less wardrobes produced to insure that the individual parts will intermember, maintain accurate alignment and be easily assembled.

TABLE III. Visual defects of assembly

Examine	Defect
Assembly	Requires special tools for assembly. Not easily assembled, i.e. requires modification, excess force or enlargement of holes. Assembled units twisted, buckled, or our of square.
Assembly instructions	Missing, illegible or incorrect.

4.3.2.3 Dimensional examination. Any dimension not within tolerance specified shall be classified as a defect.

4.3.2.4 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking as required by Section 5 of this specification are complied with. Defects shall be scored as specified in Table IV. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot.

TABLE IV. Preparation for delivery defects

Examine	Defect
Marking	Incorrect; illegible; of improper size, location, sequence, or method of application.
Material	Any non-conforming components, component missing, damaged, or otherwise defective affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of shroud, inadequate security of hardware, panels and doors of contents and padding of perimeter edges.
Contents	Not as specified.

4.3.3 Inspection levels and acceptable quality levels (AQL's). Inspection and acceptable quality levels expressed in defects per hundred units shall be shown in Table V.

TABLE V. Acceptable quality levels in accordance with MIL-STD-105

For examination in	Inspection levels	AQL's	
		Major	Total
Table II	II	2.5	10.0
Table III	S-2	---	4.0
4.3.2.3	S-2	---	4.0
Table IV	S-2	---	4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of end item defects

Examine	Defect	Classification Major	Minor
Enamel finish	Poor adhesion, i.e. blistered, checked, peeling; tacky (not dry to touch); color separation, stain, not smooth and uniform, runs, sags, foreign matter in coating, area of thin coating or abrasion.		X
	Wrong color.		X
	Scratch through to base metal, bare spots, rust under coating.	X	
Workmanship and Construction (general)	Any part missing except lockwashers, screws and rivets.	X	
	Malformed or mislocated parts affecting serviceability.	X	
	Broken, punctured or cracked parts. Sharp edge or projection that may cause injury.	X	
	Malformed, mislocated, damaged, buckled or warped parts affecting appearance. Any dent on exposed surfaces affecting appearance.		X
	Incorrect formation or design of component preventing it from adequately performing its specified function.	X	
	Edges not "eased off" where required.		X
	Any loose or unsound glue joint.		X
	Spacing of screws not as specified.		X
	Screw point visibly bulging surface.	X	
Screws, lockwashers and rivets	Screws and lockwashers not metal plated; threads stripped on more than one screw; more than one screw, lockwasher or rivet missing.	X	
	Threads stripped on screws; one screw, lockwasher or rivet missing.		X
Vinyl "Tee" moulding	Wrong color.		X
	Wrong size; buckled; dented; cracked, loose, broken, or sharp edges.	X	
Door handles	Wrong type; no latching device.	X	
Hinges	Wrong type; not secured to door and frame as specified.	X	
Miscellaneous hardware	Wrong type, wrong location, not securely attached.		X
Three point latching mechanism	Does not latch door securely.	X	
	Rattles, does not operate smoothly.		X
Magnetic catches	Will not properly align with door strikes, wrong type.	X	
Elbow latch	Does not latch overchest door securely.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of end item defects (continued)

Examine	Defect	Classification Major	Minor
Identification marking	Missing, not permanent, illegible, incomplete or incorrect.		X
End panels	Not flush with top and door fronts.	X	
Doors	Excessive gap between doors, not hung evenly.	X	
Top, bottom and shelf	Wrong dimensions, not perpendicular to end panels.	X	
Back	Wrong color.		X
	Wrong type, wrong dimensions, not attached properly.	X	
Toe board	Wrong dimension, wrong position, wood blocks not secure.	X	
Welding	Missing, not sound (broken, cracked, burnt, poor adhesion).	X	
	Not ground smooth, protrudes or pits not filled.		X
Steel frame assemblies	Not steel specified, not rigid, cross members not perpendicular to vertical members.	X	
Drawers	More than one drawer glue block missing.	X	
	Drawer does not close completely.		X
Top (three drawer chest)	Top not self-edged.		X

4.4 Sampling, inspection and test procedures.

4.4.1 Test report. The test cycle specified herein is intended to determine compliance with the requirements (see 4.6) for Level A or B packing and shall be required on two units identical to the item being packed for each level of packing specified in the contract or order. No testing is required for Level C packing. Tests may be conducted by the manufacturer using his own test equipment, by the manufacturer's container supplier, or in a commercial testing laboratory. A test report, indicating no damage to the contents and no functional damage to the container and packing, will be accepted as proof of compliance for the level of packing specified in the contract or order and be made available to the inspection service. The test results shall be obtained from tests conducted on units identical to those specified in the contract or order. Test results, obtained as a result of tests conducted prior to date of contract or order, shall contain a complete description of the packaging, packing, materials, and items packed within 12 months prior to date of a new contract or order. A packed item, identical to the ones which passed the compliance test (see 4.6), shall be made available for identification by the Government representative and remain at the supplier's plant until the last shipment on the contract as a guide in determing that the packaging and packing furnished on the contract conforms to the items tested. At the option of the Government, it may be required that the tests conducted by a supplier with his own test equipment, or by the manufacturer's container supplier, shall be conducted under the supervision of the Government Inspector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4.4.2 Examination after testing. After the specified tests (see 4.6) for levels A or B have been accomplished, a visual examination shall be made of the shipping container and its contents. Any damage to the components or functional damage to the container or packing shall be cause for rejection. Structural damage to the container, which could result in spilling or exposure to the contents or failure of the contractor in subsequent handling, is cause for rejection. Substantial shifting of the contents within the container that create conditions likely to cause damage during shipment, storage, and reshipment, will also be cause for rejection. Minor container damage will not be cause for rejection. When the visual examination has been complete, the tested KD units shall be assembled. Any bent, twisted, or misaligned components that prevent proper assembly of the wardrobe or operation of its doors and door handles shall be cause for rejection.

4.5 Tests.

4.5.1 The following tests describe the procedures and equipment for preshipment testing of packed units. A test cycle in the order specified herein shall consist of all the tests required for a packed item.

4.5.2 Conditioning. Packed units conforming to the requirements for level A packing shall be conditioned at 100° ± 3°F. and 90 percent ± 3 percent relative humidity for 48 hours prior to testing. They shall then be tested within six hours after being removed from the high temperature and humidity environment. No pre-test conditioning is required for Level B packing.

4.5.3 Vibration test. Packed units shall be subjected to the Vibration (Repetitive Shock) Test, Methods 5091 of Fed. Test Method Std. No. 101. The shipping container shall lay on its largest face, as it would normally be stacked, on the vibrating platform. The length of time the container is subjected to vibration shall be 1 hour when Level B packing is required, or two hours when Level A packing is required.

4.5.4 Superimposed - Load Test. Packed units shall be subjected to a compressive load of 9300 pounds using Method 5016 of Fed. Test Method Std. No. 101. The load shall be applied for 1 hour, in a direction perpendicular to the largest container face, as it would be under normal stacking conditions. No vertical deflection measurements are required. This test applies to Level A and B packing.

4.5.5 Drop test. Packed units shall be subjected to the Cornerwise Drop (Rotational) Test, Method 5005 of Fed. Test Method Std. No. 101. The drop height shall be 27 inches when Level B packing is required and 36 inches when Level A packing is required. The container shall be dropped once on each of two diagonally opposed corners or the largest container face. Then the container shall be turned over and dropped once on each of the remaining two diagonally opposed corners of the face opposite the first one used.

4.5.6 Doors. A 200 pound test load shall be suspended from each door by a rope located not more than 3 inches back from the leading vertical edge. In a normal manner, each door shall then be pivoted on its hinges, back and forth, at least 150 degrees in each direction and not less than 50 times each way. After the test the gap between the doors shall be a minimum of 1/8 inch, maximum 3/16 inch (see 3.3.8).

4.5.7 Test for adhesives. Test for adhesives shall be as shown below.

Test for adhesives

Component	Characteristic	Requirement Reference	Test Method	Sample Unit
Adhesive	Block shear test	3.2.1	ASTM D 905 1/ 2/	1/2 pint

1/ The following modifications apply when testing animal adhesive. The moisture content of the wood shall be from 6 to 9 percent. The test joints, upon removal from pressure shall be conditioned at a relative humidity of 40 ± 4 percent.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T11:41Z
Check the source to verify that this is the currentversion before use.

2/ A test specimen that fails at less than 2,800 p.s.i. and displays 50 percent or more wood failure, shall be disregarded when computing the average shear strength. When the average shear strength, (a) is less than the required 2,800 p.s.i., (b) has a 10 percent or greater difference between the high and low test specimen values, and (c) one or more samples fails at 2,800 p.s.i. or more, the test shall be rerun.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be Level A, B, or C, as specified (see 6.2).

5.1.1 Level A. Each disassembled wardrobe shall be packaged as follows: The door assembly shall have the doors secured in a closed position utilizing tape conforming to PPP-T-42. All loose hardware, except rod, when applicable, shall be packaged in a heat sealed bag or bags. The bags shall be constructed from film a minimum of .003 inches thick conforming to L-P-378.

5.1.2 Level B. The wardrobe shall be individually packaged in accordance with 5.1.1.

5.1.3 Level C. The wardrobes shall be individually packaged in a manner that will insure against deterioration and damage during shipment and handling from the supply source to the first receiving activity.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. The wardrobes, packaged as specified in 5.1.1, shall be individually packed in close-fitting boxes conforming to the overseas requirements of PPP-B-576, PPP-B-585, PPP-B-591, PPP-B-601, or PPP-B-640. Each box shall be closed, sealed, and strapped or reinforced in accordance with the appendix to the applicable box specification. The packed boxes, closed, sealed and strapped or reinforced shall be individually tested in accordance with the level A requirements of paragraph 4.6.

5.2.2 Level B. Each wardrobe, packaged as specified in 5.1.2, shall be individually packed with the necessary cushioning, blockings and bracing, in a close-fitting box. Each box shall be closed, sealed, strapped, and/or reinforced, as necessary, to comply with the level B tests and requirements of Section 4 of this specification. The packed wardrobes shall be acceptable to the carrier of the Government's choice.

5.2.3 Level C. The wardrobes packaged as specified in 5.1.3, shall be individually packed to insure carrier acceptance and safe delivery at destination. The containers and necessary blocking and bracing shall be in accordance with the Uniform Freight Classification rules or the National Motor Freight Classification rules, or other carriers applicable to the mode of transportation.

5.3 Palletization. When specified, not less than six nor more than ten wardrobes packed as specified in 5.2.1 or 5.2.2 shall be packed on pallets conforming to the requirements of NN-P-71, type II, with the following exceptions: (a) The minimum dimensions of the pallet deck shall be not less than the length and width of the packed wardrobes, (b) The stringers shall run parallel with the short dimension of the packed wardrobe and each pallet shall have 5 stringers, (c) The spacing between the deckboards shall be no more than 3 inches. The load shall be secured to the pallet with a minimum of three straps perpendicular to the wardrobe length and two straps perpendicular to the wardrobe width. Strapping used shall conform to QQ-S-781, type I or to PPP-S-760, type II or III. The minimum strap size shall be 3/4 x .020 inches for QQ-S-781 and 1/2 x .030 inches for PPP-S-760.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

5.4 Marking. In addition to any special marking required by the contract or order, all marking shall be in accordance with 5.4.1 or 5.4.2 as specified (see 6.2).

5.4.1 Civil agencies. Marking shall be in accordance with Fed. Std. No. 123.

5.4.2 Military agencies. Marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Type I, Class 1 and 2 wardrobes are intended for household use when built-in closets are not provided or when extra storage is required. All other units are intended for use in barracks and other similar installations.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this specification.
b. Type of unit required (see 1.2.1).
c. If preproduction sample requirement is waived (see 3.1).
d. Level of packaging and packing required (see 5.1).
e. Color and or grain of decorative laminate required.
f. Color and or grain of "Tee" molding required.
g. Color of interior frame.

6.3 Standard reference panels. Sample panels of the standard grain and color are obtainable, without charge, from the General Services Administration, Federal Supply Service, Washington, D. C., 20406.

6.4 Definition of welding terms.

6.4.1 Fusion welding. Fusion welding consists of any welding process in which the weld is carried out solely by the melting of the metals to be joined, without any mechanical pressure. The joining is usually accomplished through the fusion of metal deposits from external sources.

6.5 The following manufacturers are known sources of supply for the item indicated.

3.2.9.1.1 Handle.
Corbin Cabinet Lock #W1000A, or equal
Berlin, Connecticut 06037

National Lock Hardware #68-0341 or 68-429, or equal
Rockford, Illinois 61101

3.2.9.1.2 Handle.
Bassick Sack Division #DC25598, or equal
Stewart-Warner Corporation
Winston-Salem, North Carolina 27105
919/725-1331

3.2.9.1.3 Door Knob.
Keeler Brass #3573-K11615, or equal
Grand Rapids, Michigan 49502

3.2.9.4 Magnetic catches.
Amerock Corporation T-9773-PT or T-9783-AL, or equal
Rockford, Illinois 61101

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.9.6 Towel bar.
Hall-Mack #893, or equal
Harrodsberg, Kentucky 40330


3.2.9.7 Mirror, acrylic.
Colonial Kolomite Company
Chicago, Illinois 60647

3.2.9.8 Shelf standards and supports.
Knape & Vogt Manufacturing Company #233, or equal
Grand Rapids, Michigan 49505

3.2.9.9 Clamp, spring utility.
Hold All Manufacturing Company #4, or equal
Suffern, New York 10901

3.2.9.13 Drawer suspensions.
Knape & Vogt Manufacturing Company #1300, or equal
Grand Rapids, Michigan 49505


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

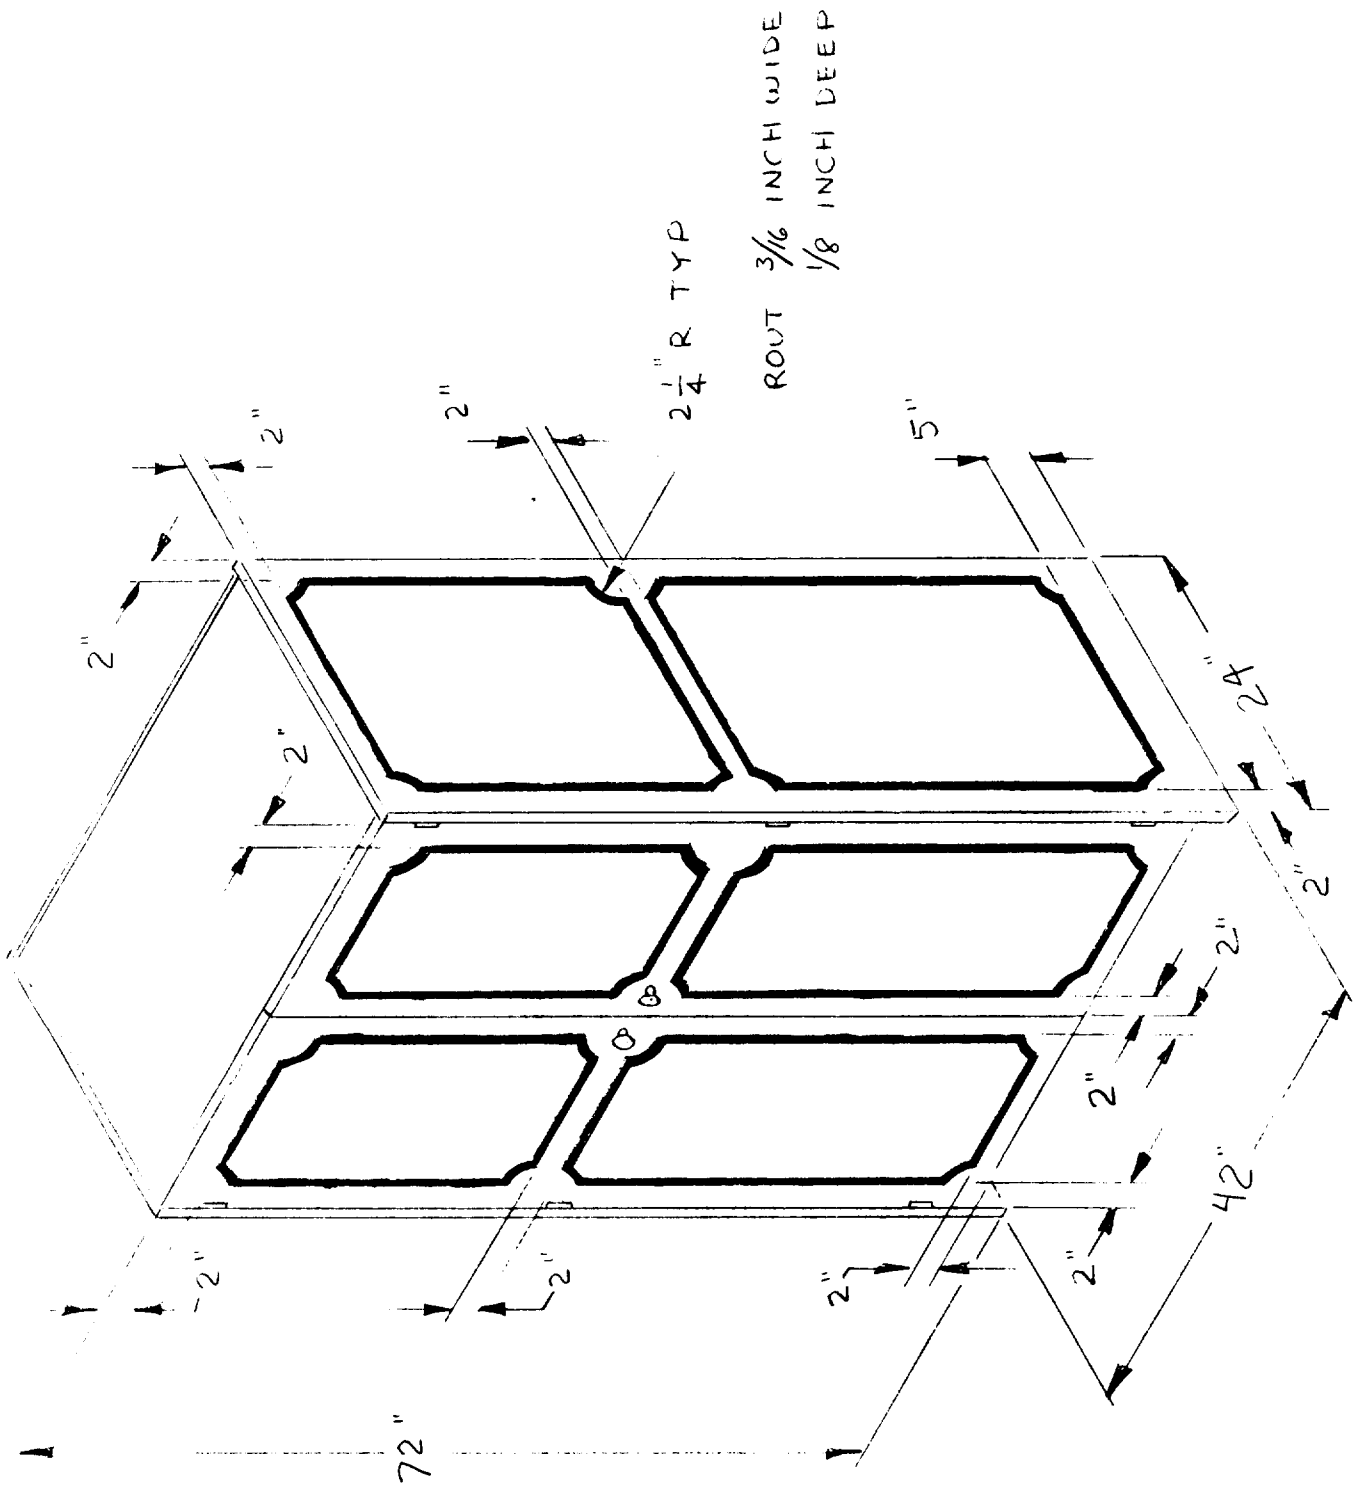

Type I, Class 1 Wardrobe - not to scale -

FIGURE 1


Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

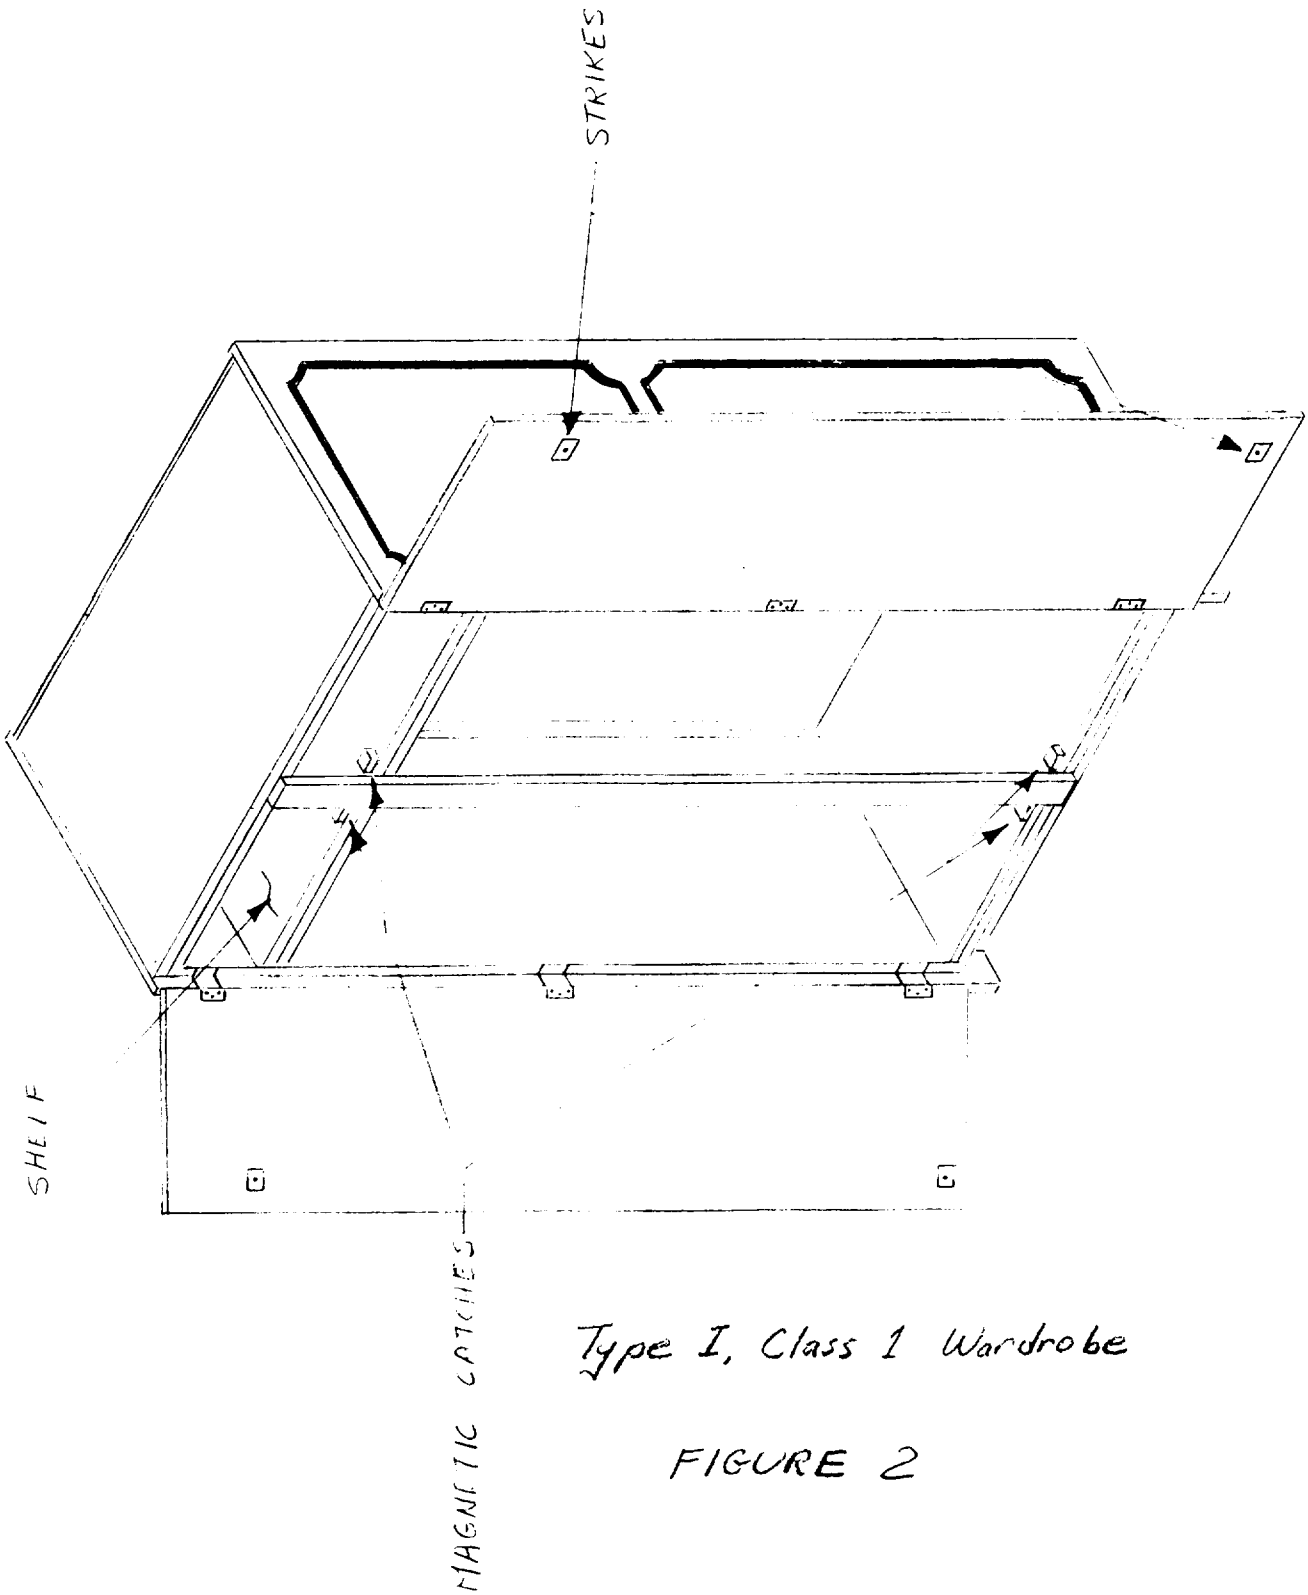

Type I, Class 1 Wardrobe

FIGURE 2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

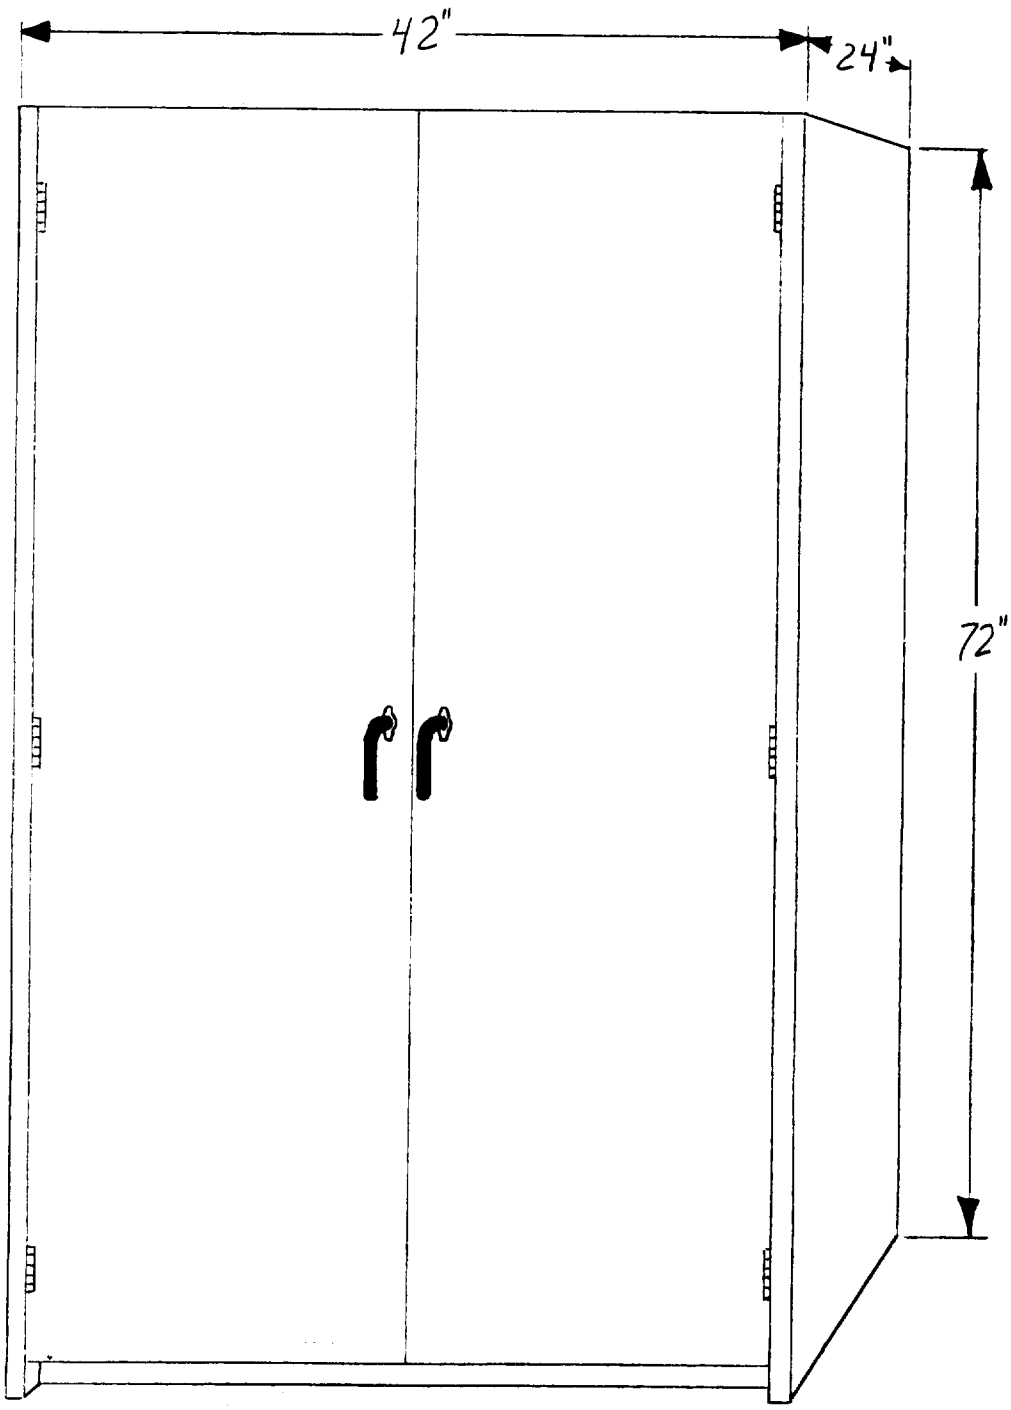

Type I, Class 2 Wardrobe
not to scale

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

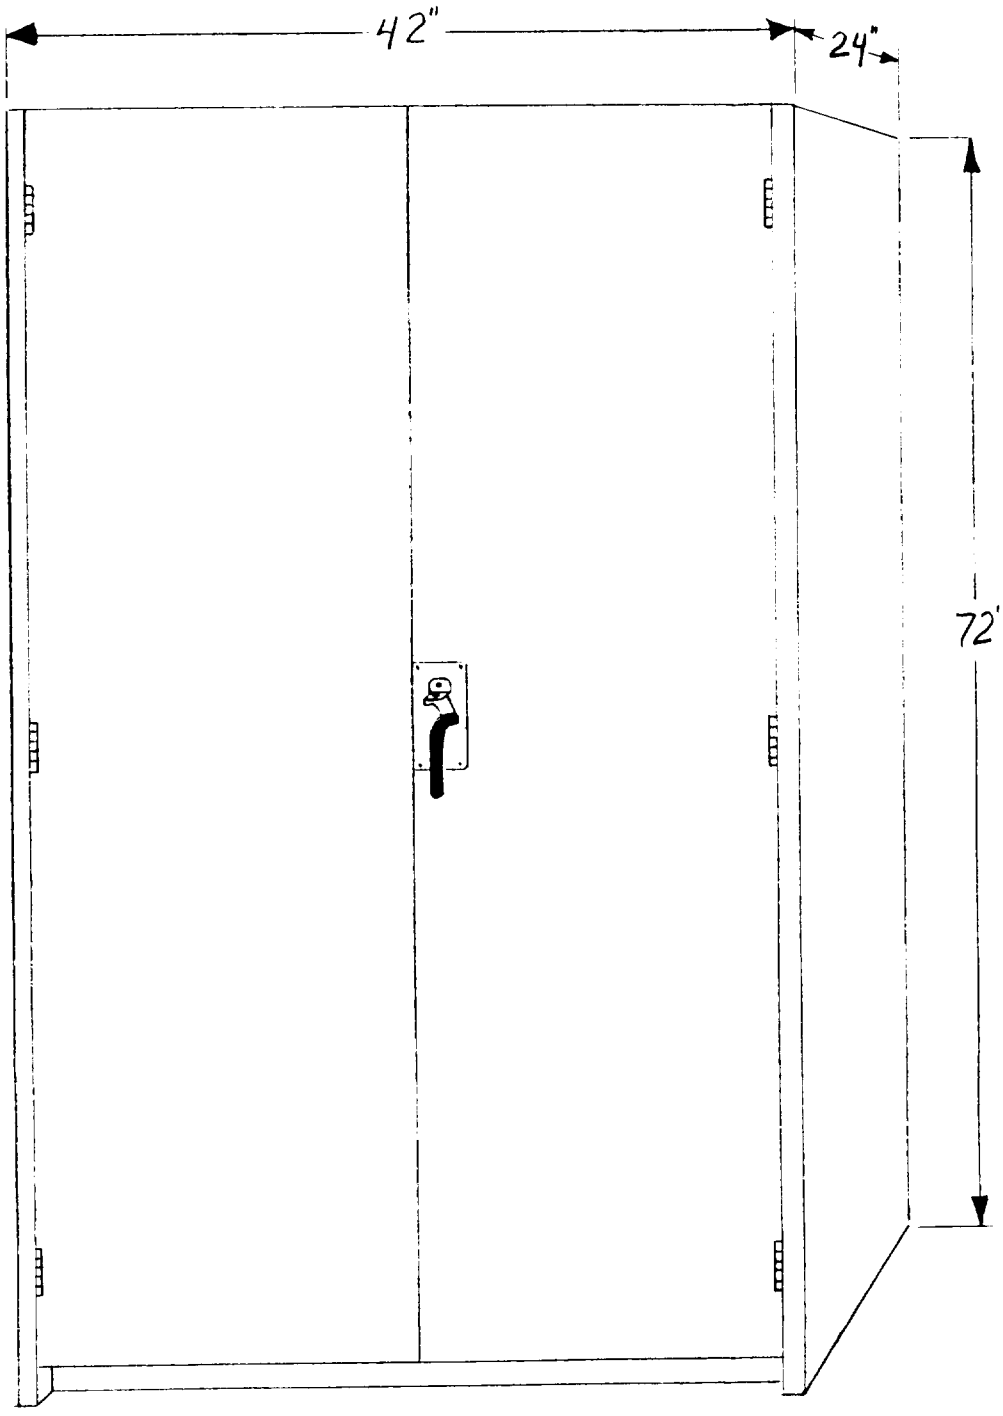


Type I, Class 3 Wardrobe
not to scale


FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

FIGURE 5

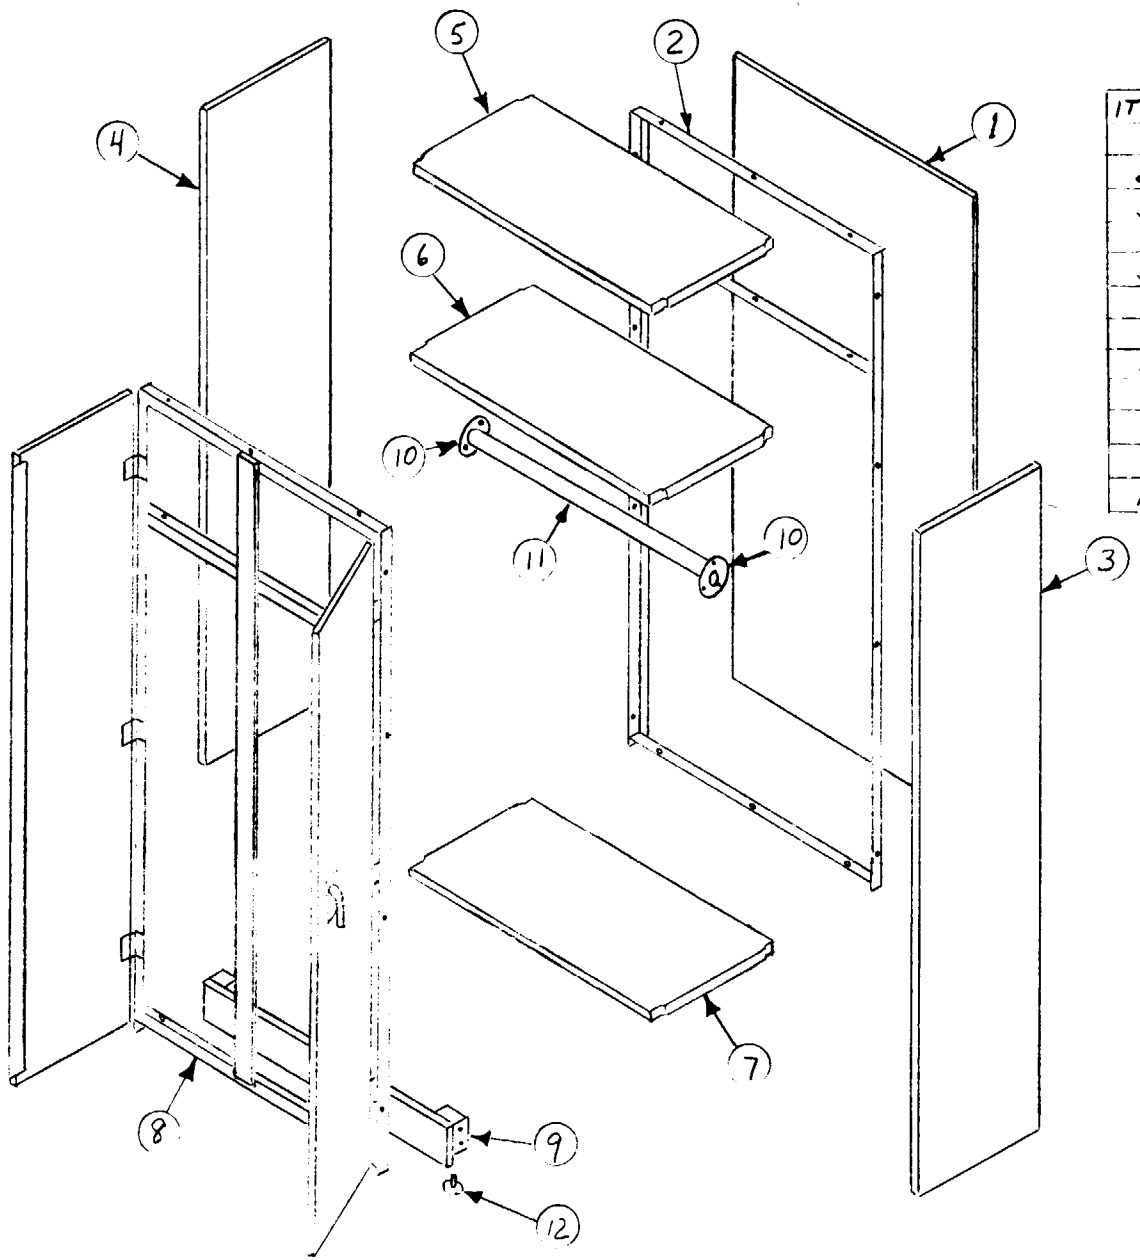


ITEM	QUANTITY	DESCRIPTION
1	1	BACK PANEL
2	1	REAR FRAME
3	1	END PANEL (SIDE) RIGHT
4	1	END PANEL (SIDE) LEFT
5	1	TOP
6	1	SHELF
7	1	BOTTOM
8	1	FRONT FRAME ASSEMBLY
9	1	TOE BOARD
10	2	CLOTHES ROD BRACKETS
11	1	CLOTHES ROD
12	2	ADJ. GLIDES

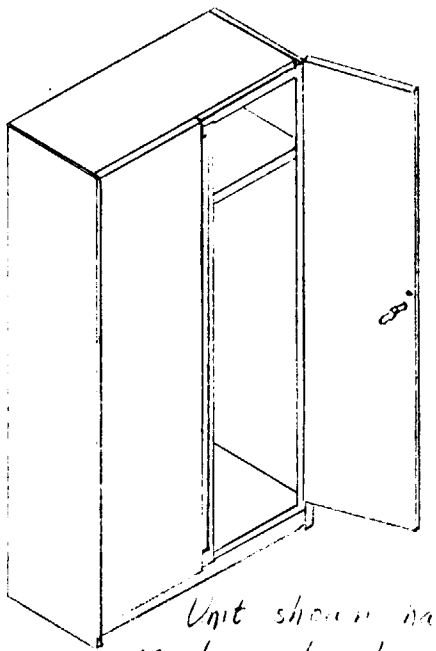

Unit shown has one door closed.

Wardrobe Type I [Class 1 unit has routing]


Source: https://assist.dla.mil -- Downloaded: 2026-02-26T11:41Z
Check the source to verify that this is the current version before use.

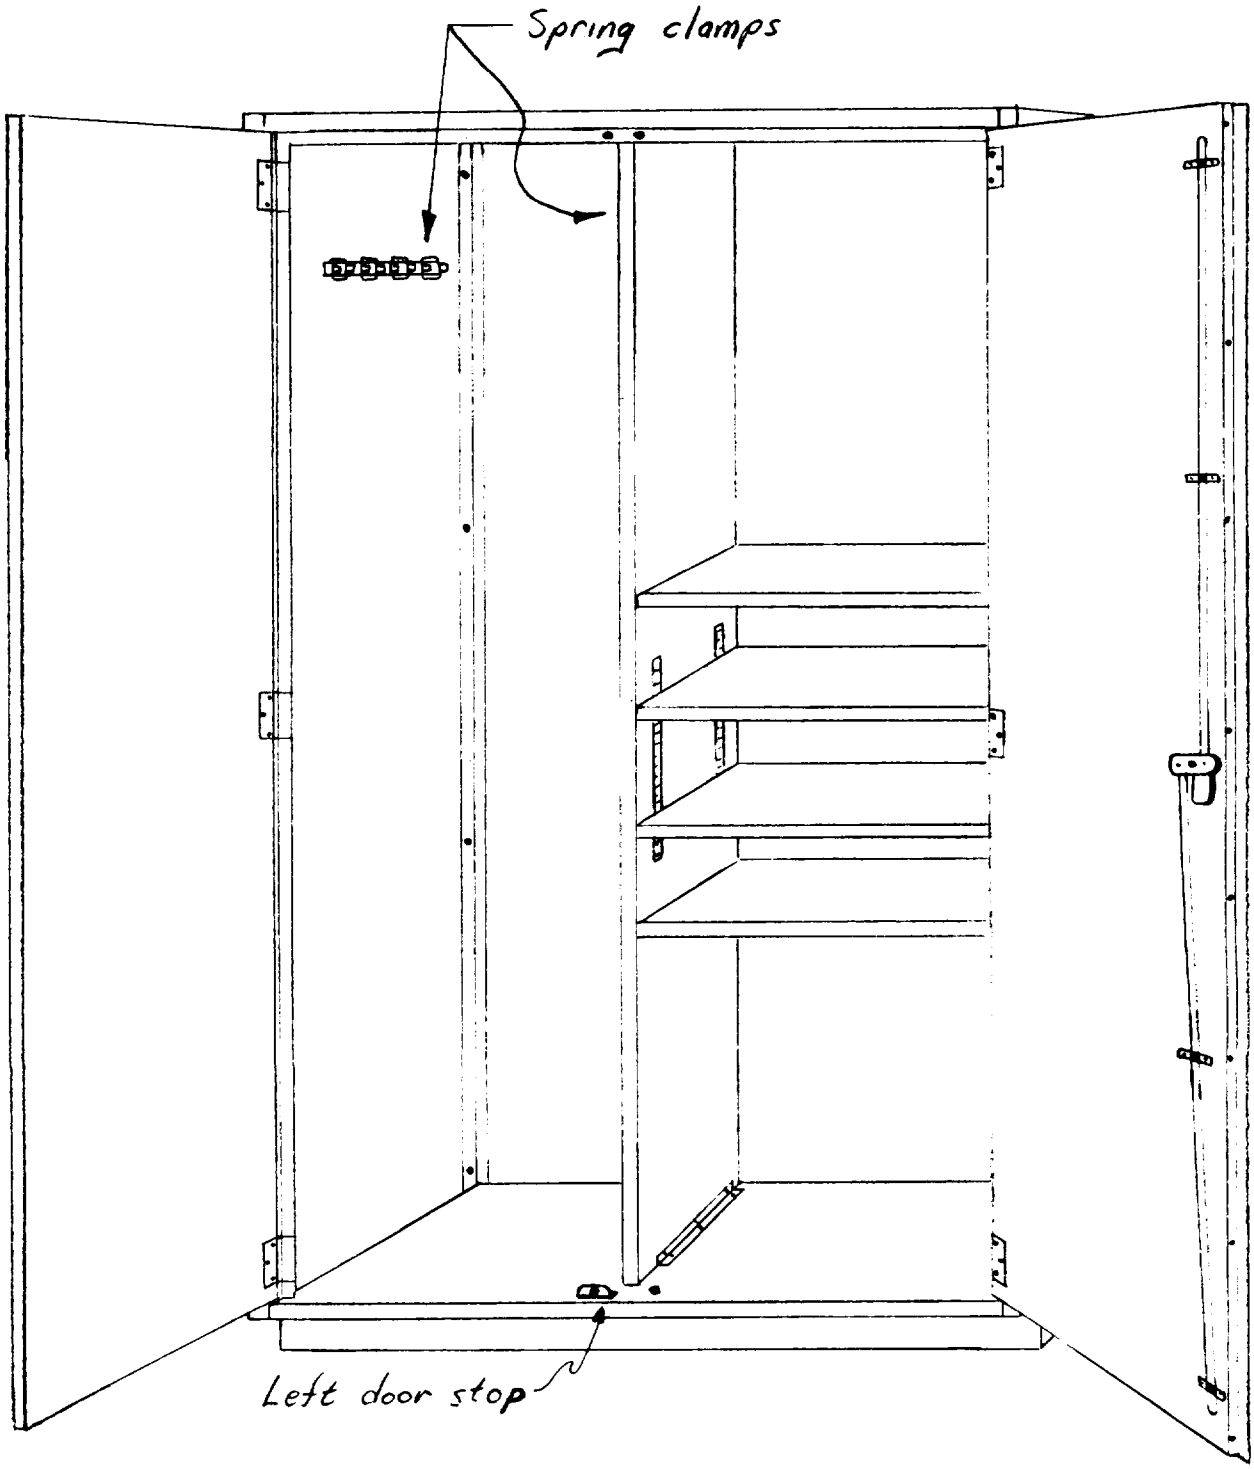

Type II, Janitor's Closet

FIGURE 6

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

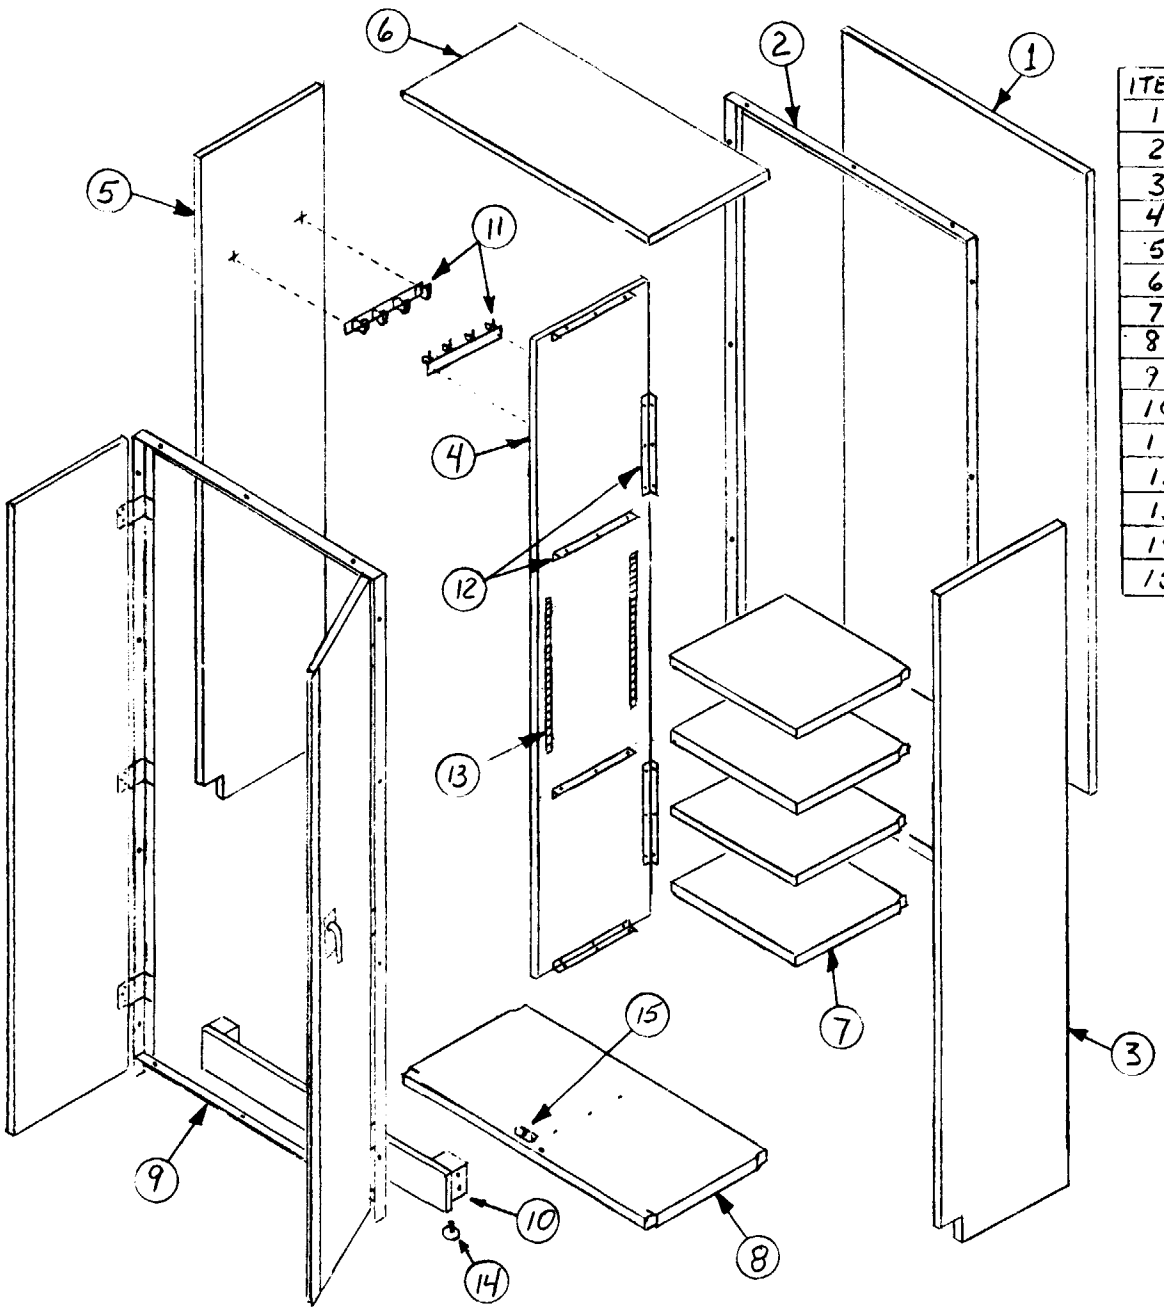


ITEM	QUANTITY	DESCRIPTION
1	1	BACK PANEL
2	1	REAR FRAME
3	1	END PANEL (SIDE) RIGHT
4	1	PARTITION PANEL
5	1	END PANEL (SIDE) LEFT
6	1	TOP
7	4	SHELVES
8	1	BOTTOM
9	1	FRONT FRAME ASSY.
10	1	TOE BOARD
11	2	SPRING CLAMP UNITS
12	8	METAL ANGLES
13	4	SHELF STANDARDS PR.
14	2	GLIDES
15	1	LEFT DOOR STOP

FIGURE 7

Janitor's Closet Type II

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

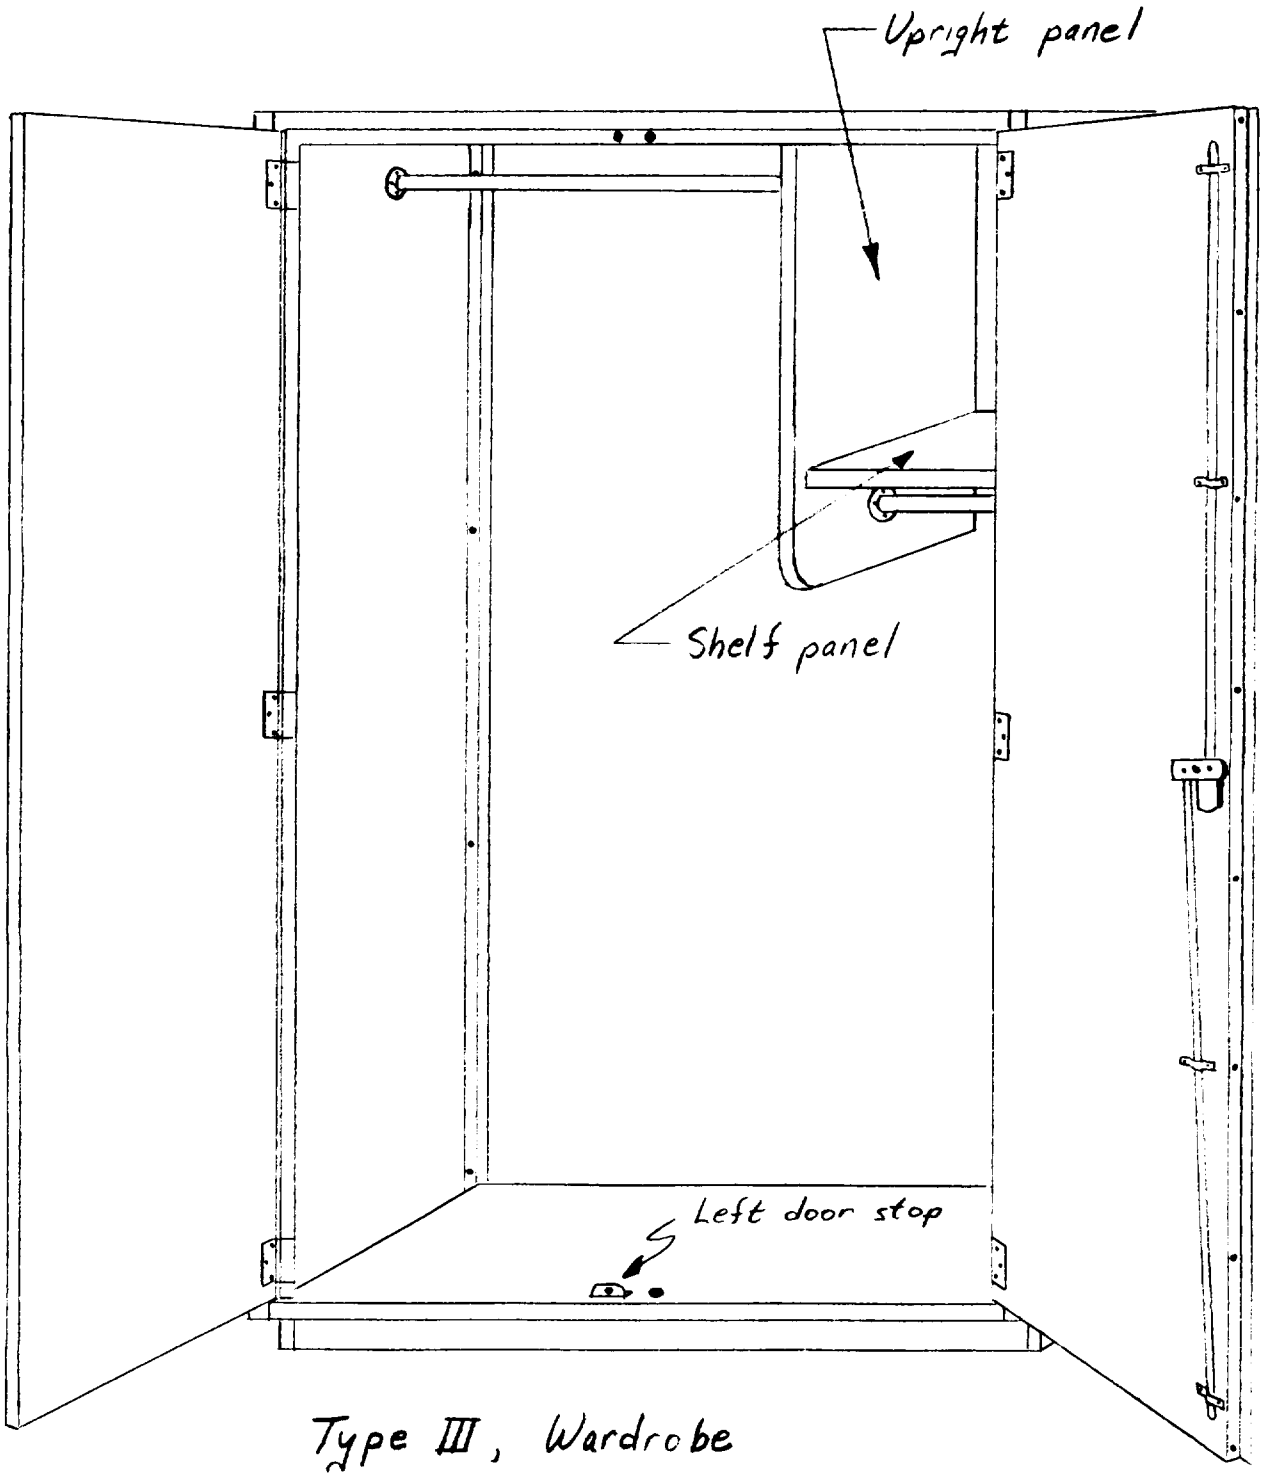


Type III, Wardrobe

FIGURE 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


ITEM	QUANTITY	DESCRIPTION
1	1	REAR FRAME ASSEMBLY
2	1	END PANEL (SIDE) RIGHT
3	1	END PANEL (SIDE) LEFT
4	1	TOP
5	1	UPRIGHT PANEL
6	1	SHELF
7	1	BOTTOM
8	1	FRONT FRAME ASSEMBLY
9	1	TOE BOARD
10	1	CLOTHES ROD 27⅜" long
11	1	CLOTHES ROD 11½" long
12	2	METAL ANGLES
13	2	GLIDE
14	1	LEFT DOOR STOP

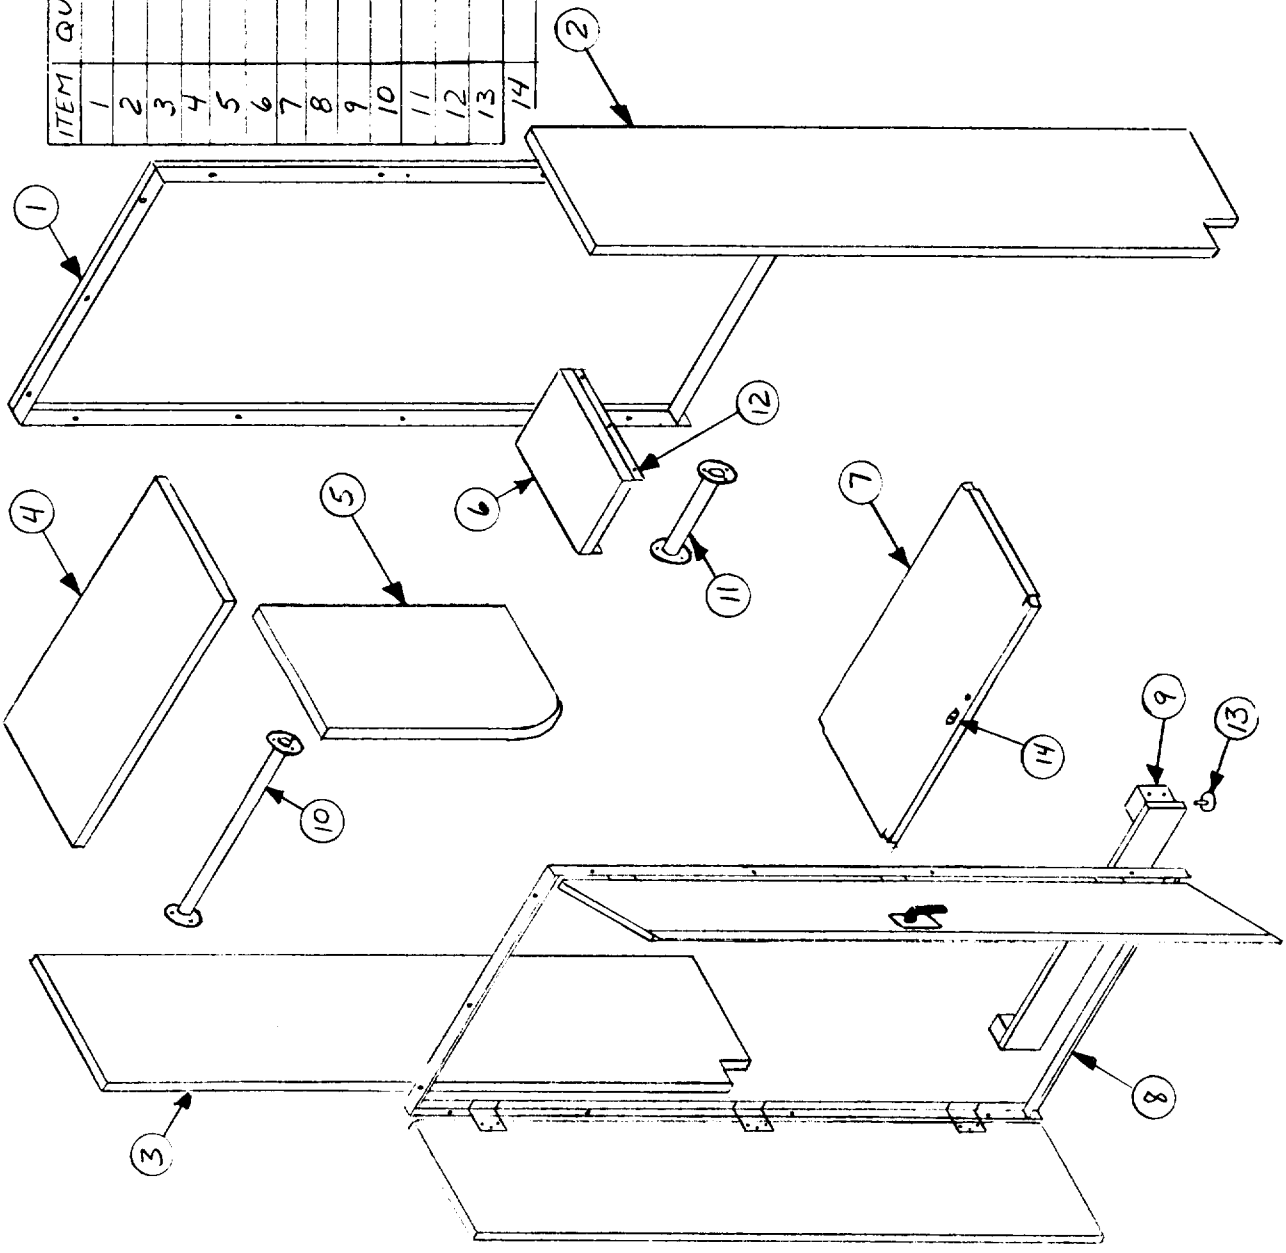

Type III Wardrobe

FIGURE 9


Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

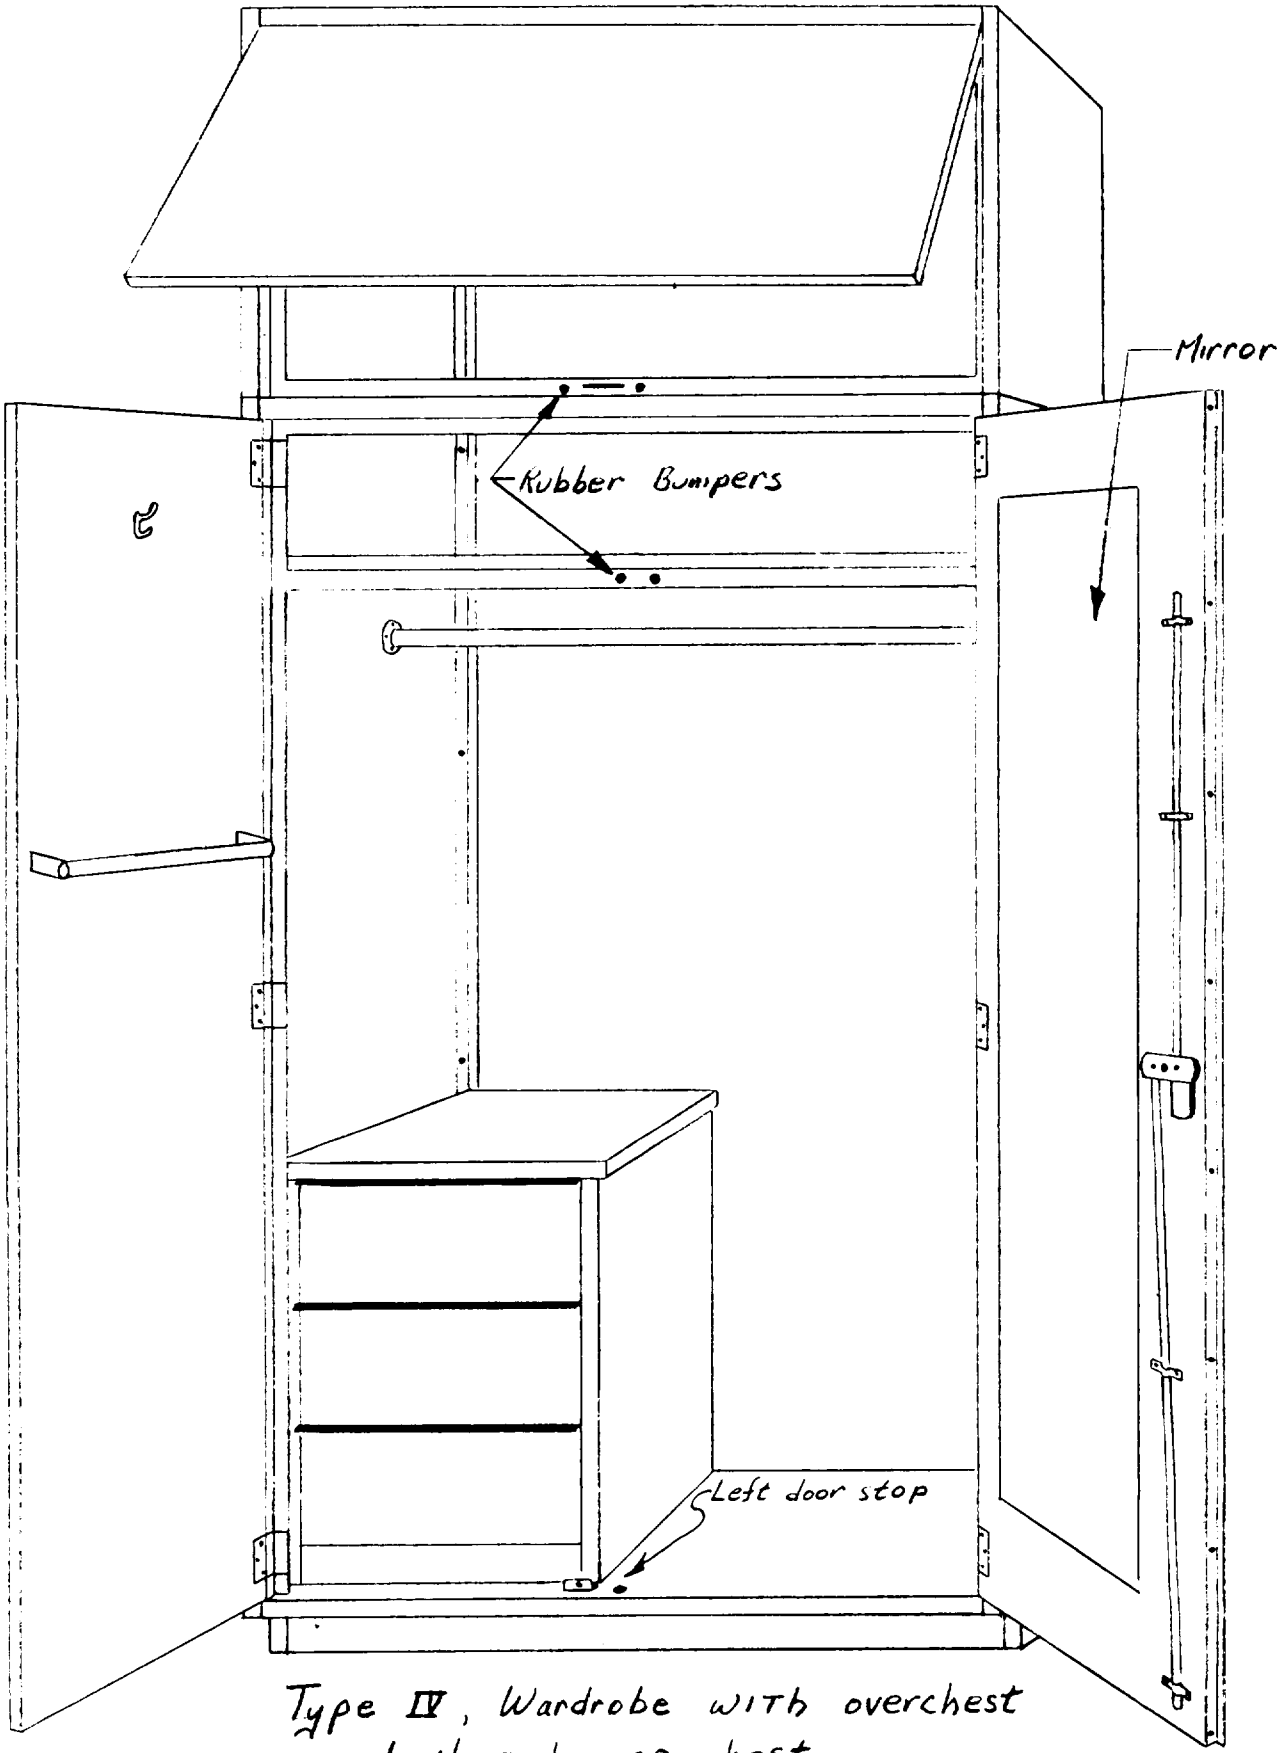

Type IV, Wardrobe with overchest and three drawer chest

FIGURE 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

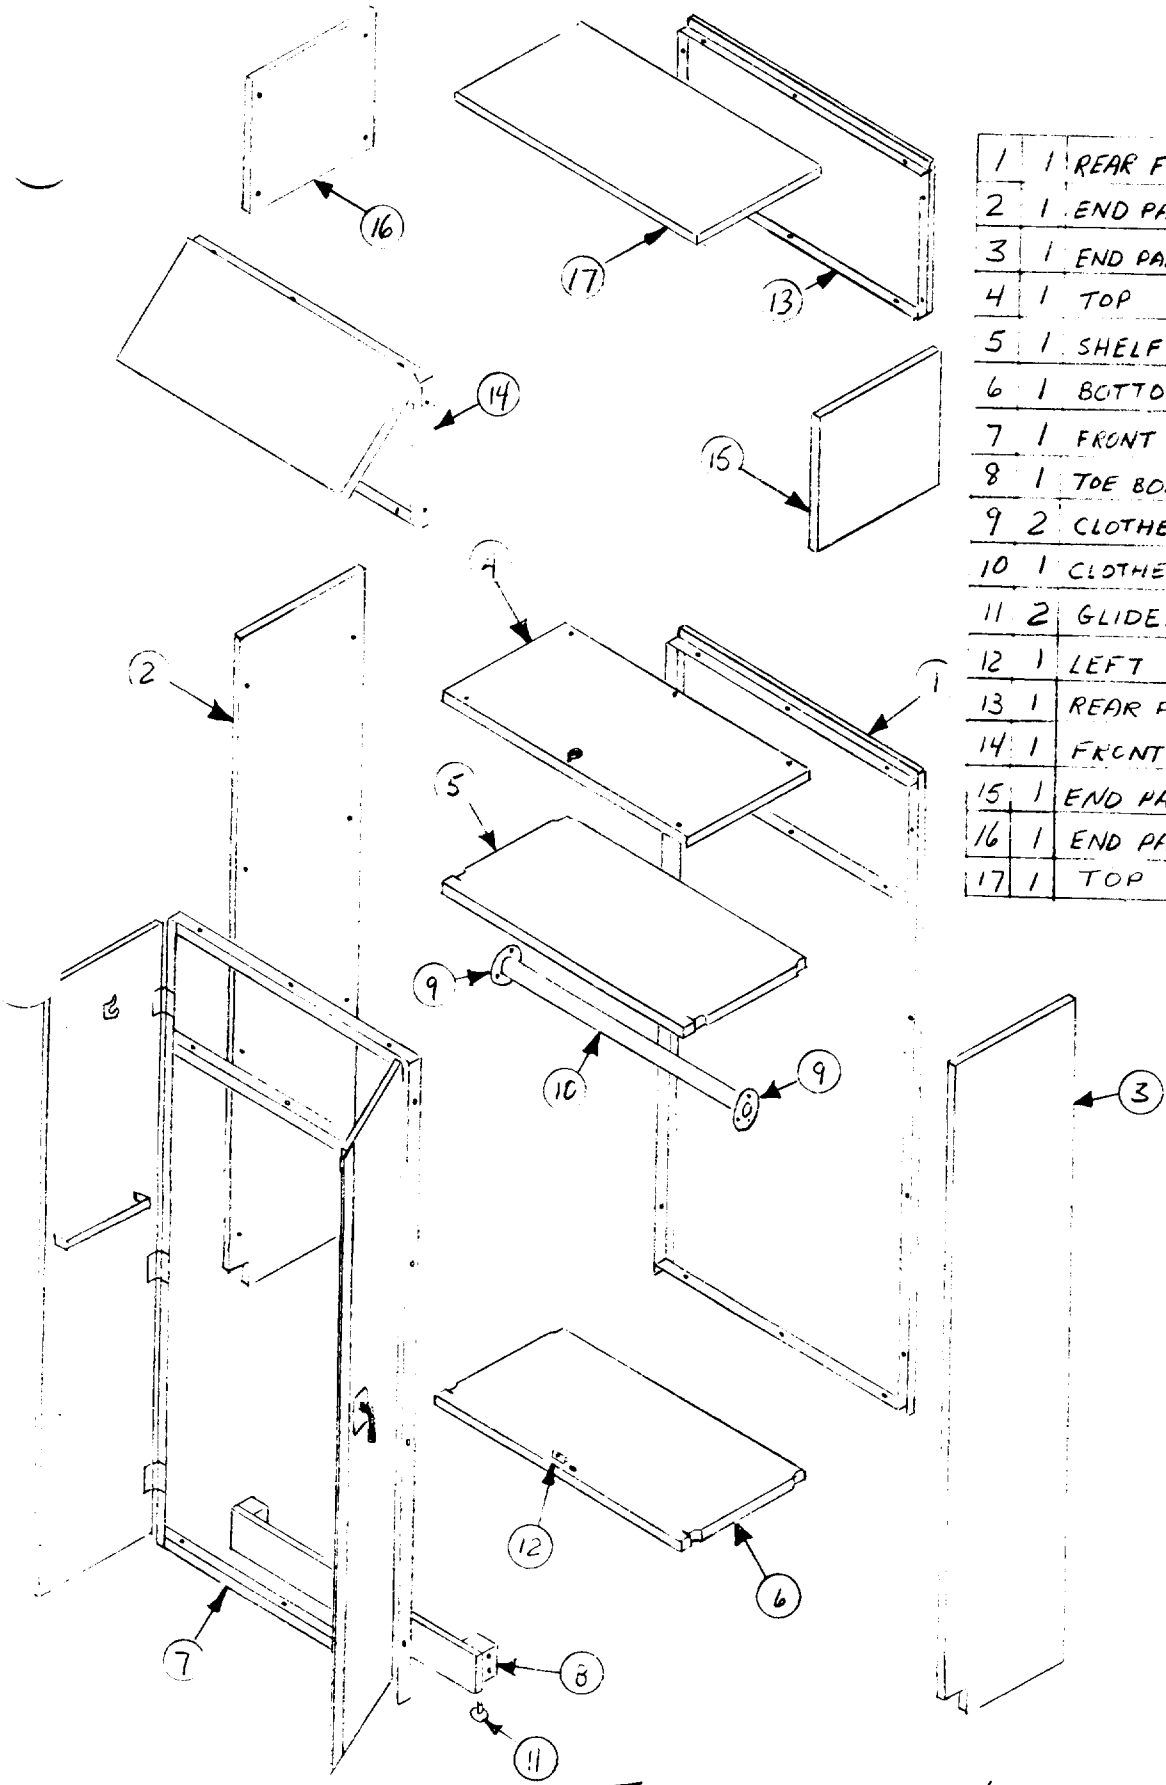


1	1	REAR FRAME ASSEMBLY
2	1	END PANEL (SIDE) LEFT
3	1	END PANEL (SIDE) RIGHT
4	1	TOP
5	1	SHELF
6	1	BOTTOM
7	1	FRONT FRAME ASSEMBLY
8	1	TOE BOARD
9	2	CLOTHES ROD BRACKETS
10	1	CLOTHES ROD
11	2	GLIDES
12	1	LEFT DOOR STOP
13	1	REAR FRAME ASSY.
14	1	FRONT FRAME ASSY
15	1	END PANEL (SIDE) RIGHT
16	1	END PANEL (SIDE) LEFT
17	1	TOP

Type IV Wardrobe

FIGURE 11


Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

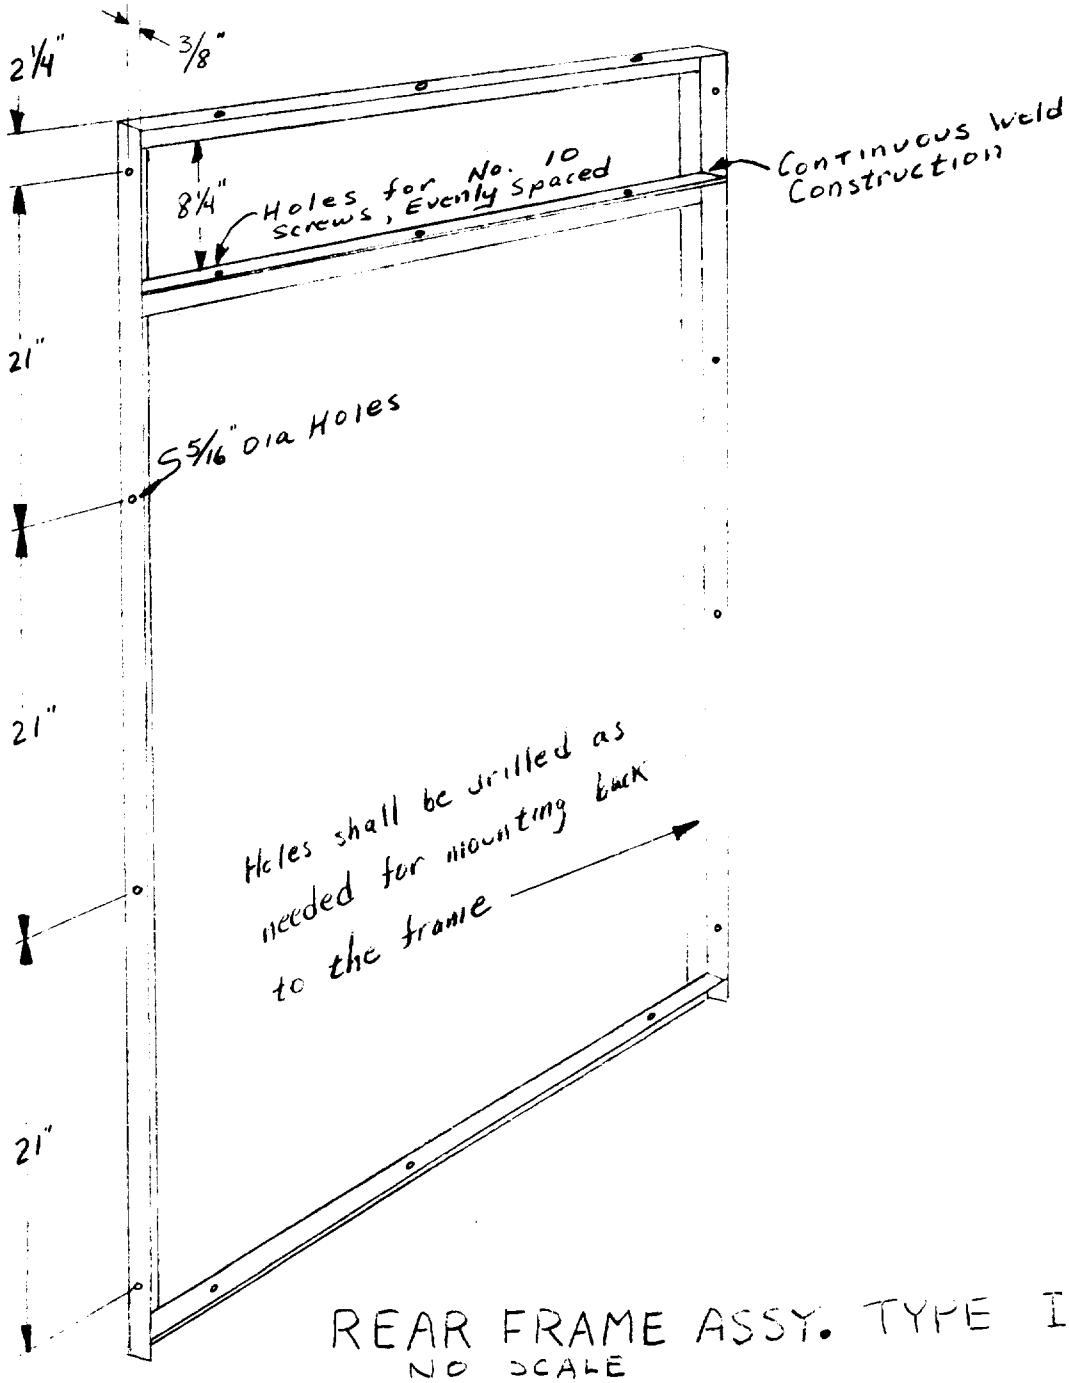

REAR FRAME ASSY. TYPE I
NO SCALE

FIGURE 12


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

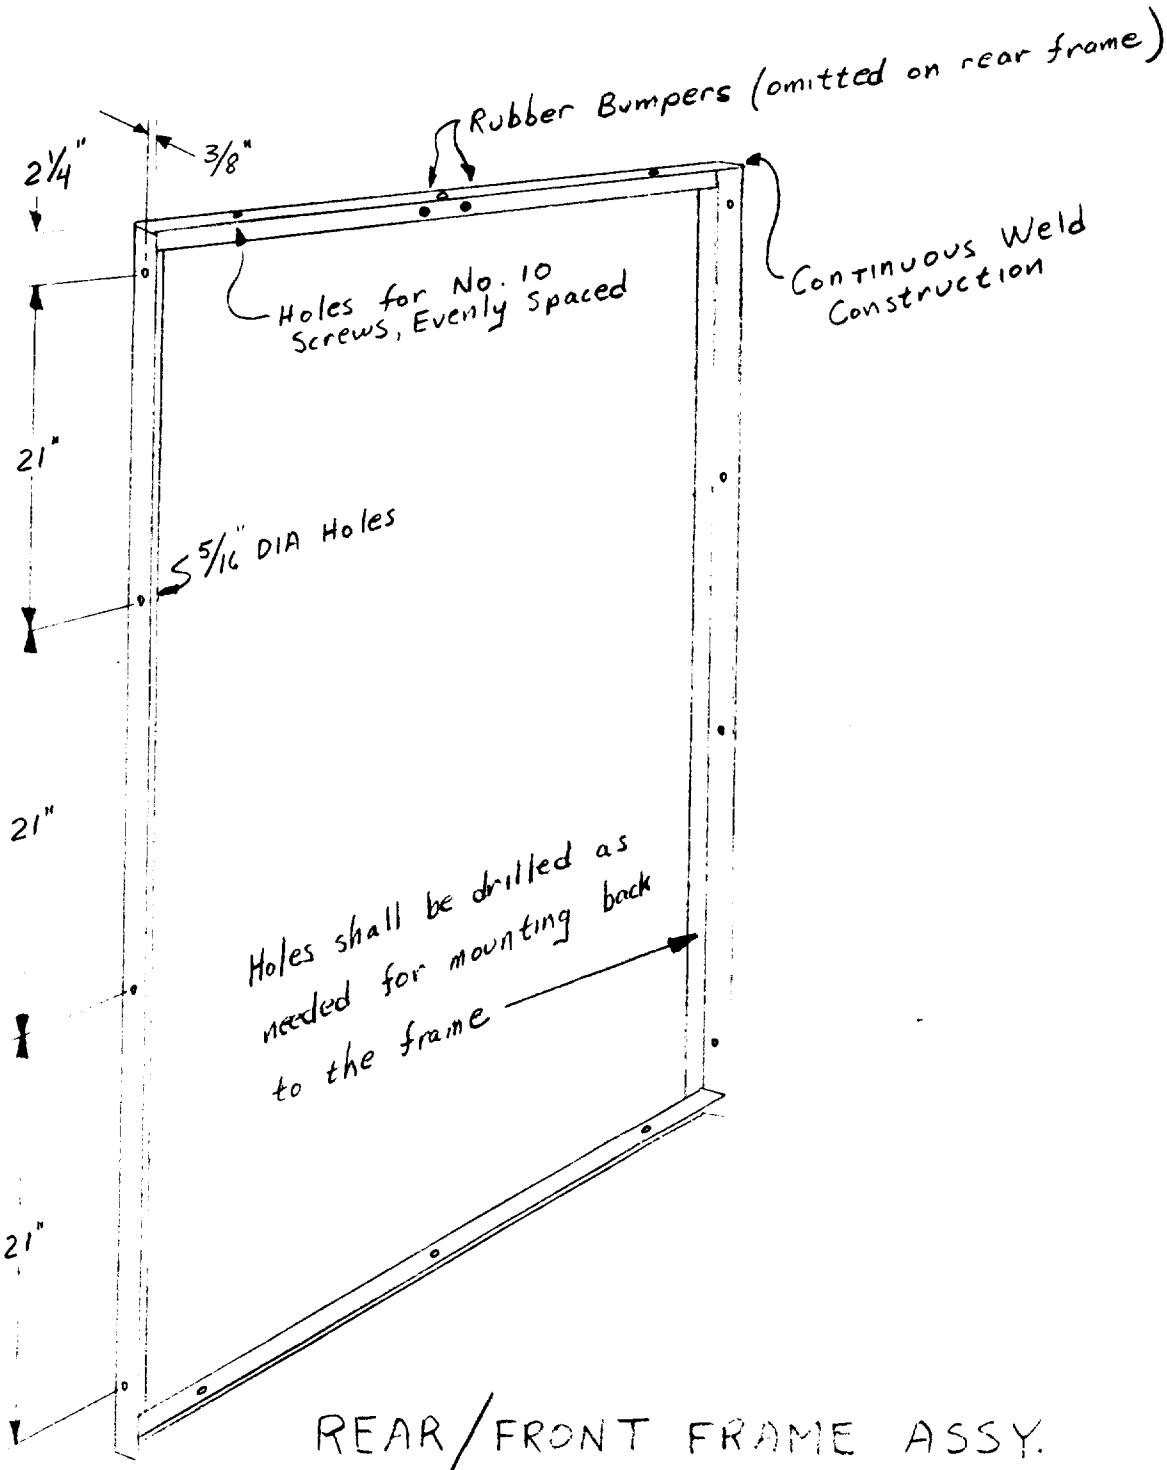

REAR/FRONT FRAME ASSY.
TYPE II & III
NO SCALE

FIGURE 12


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

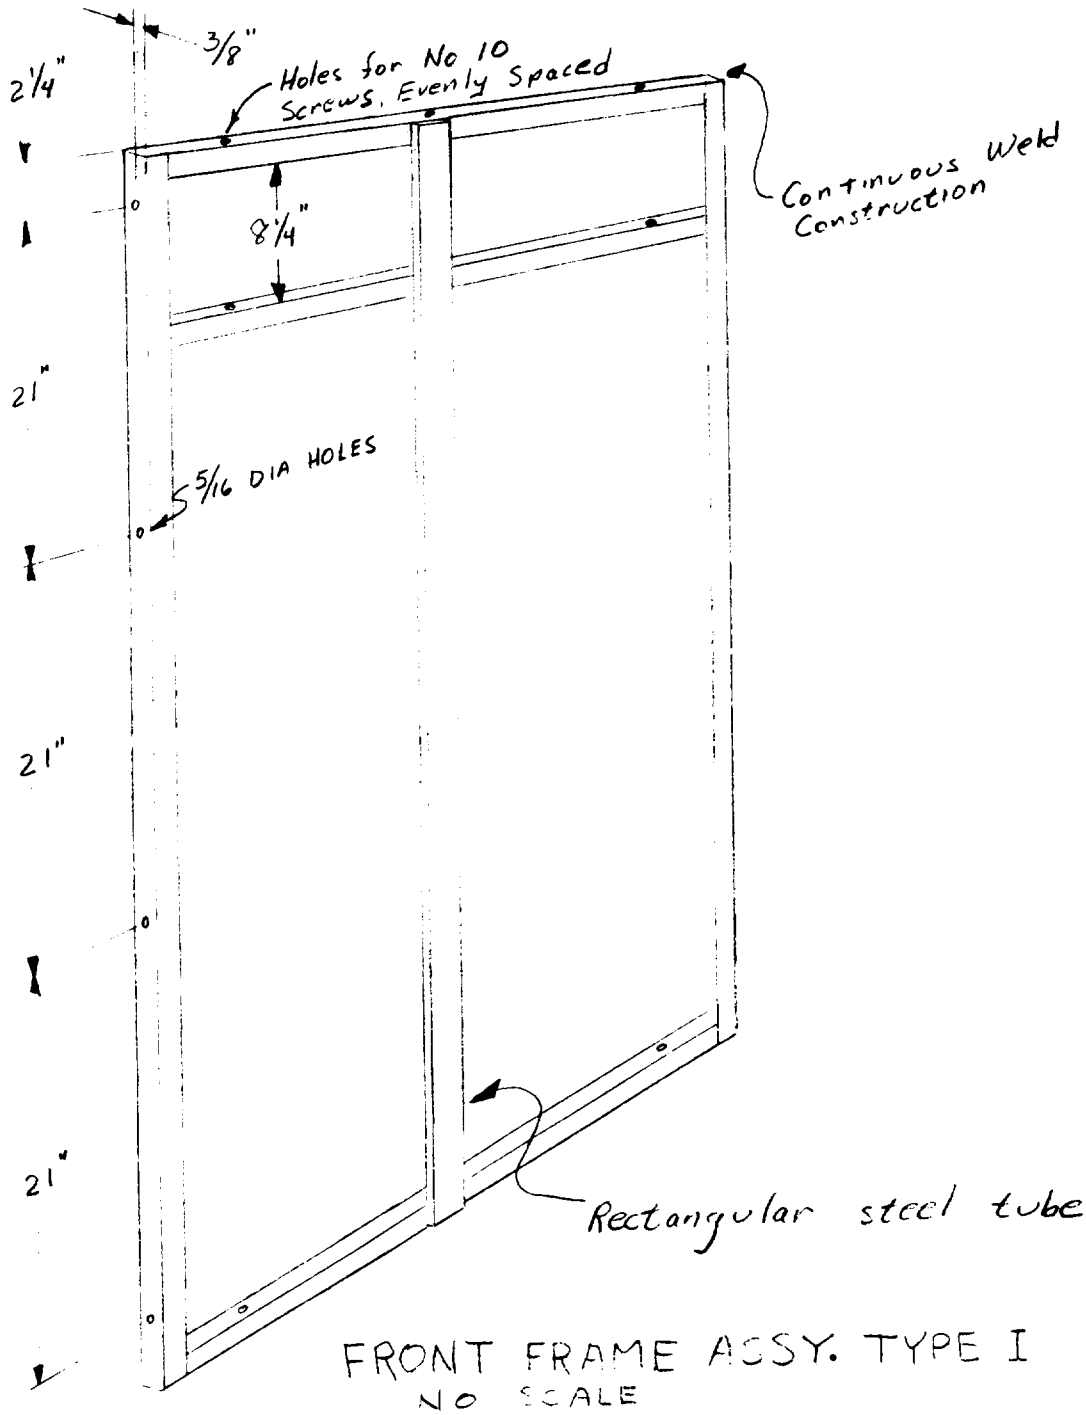

FRONT FRAME ASSY. TYPE I
NO SCALE

FIGURE 14


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

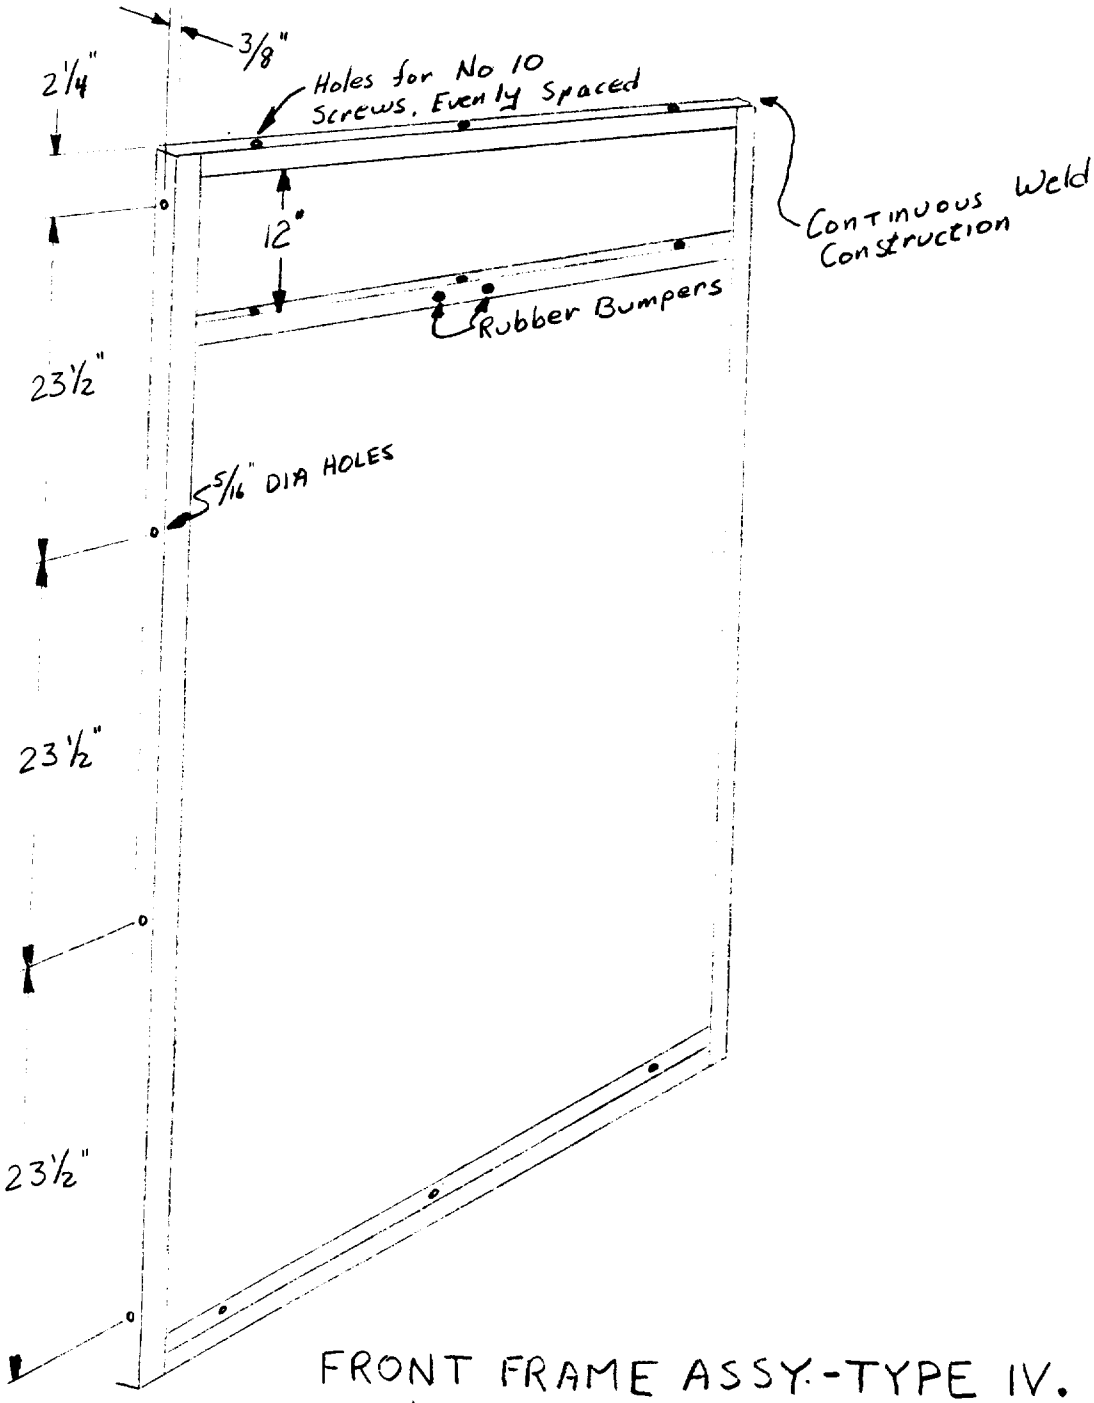

FRONT FRAME ASSY.-TYPE IV.
NO SCALE

FIGURE 15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

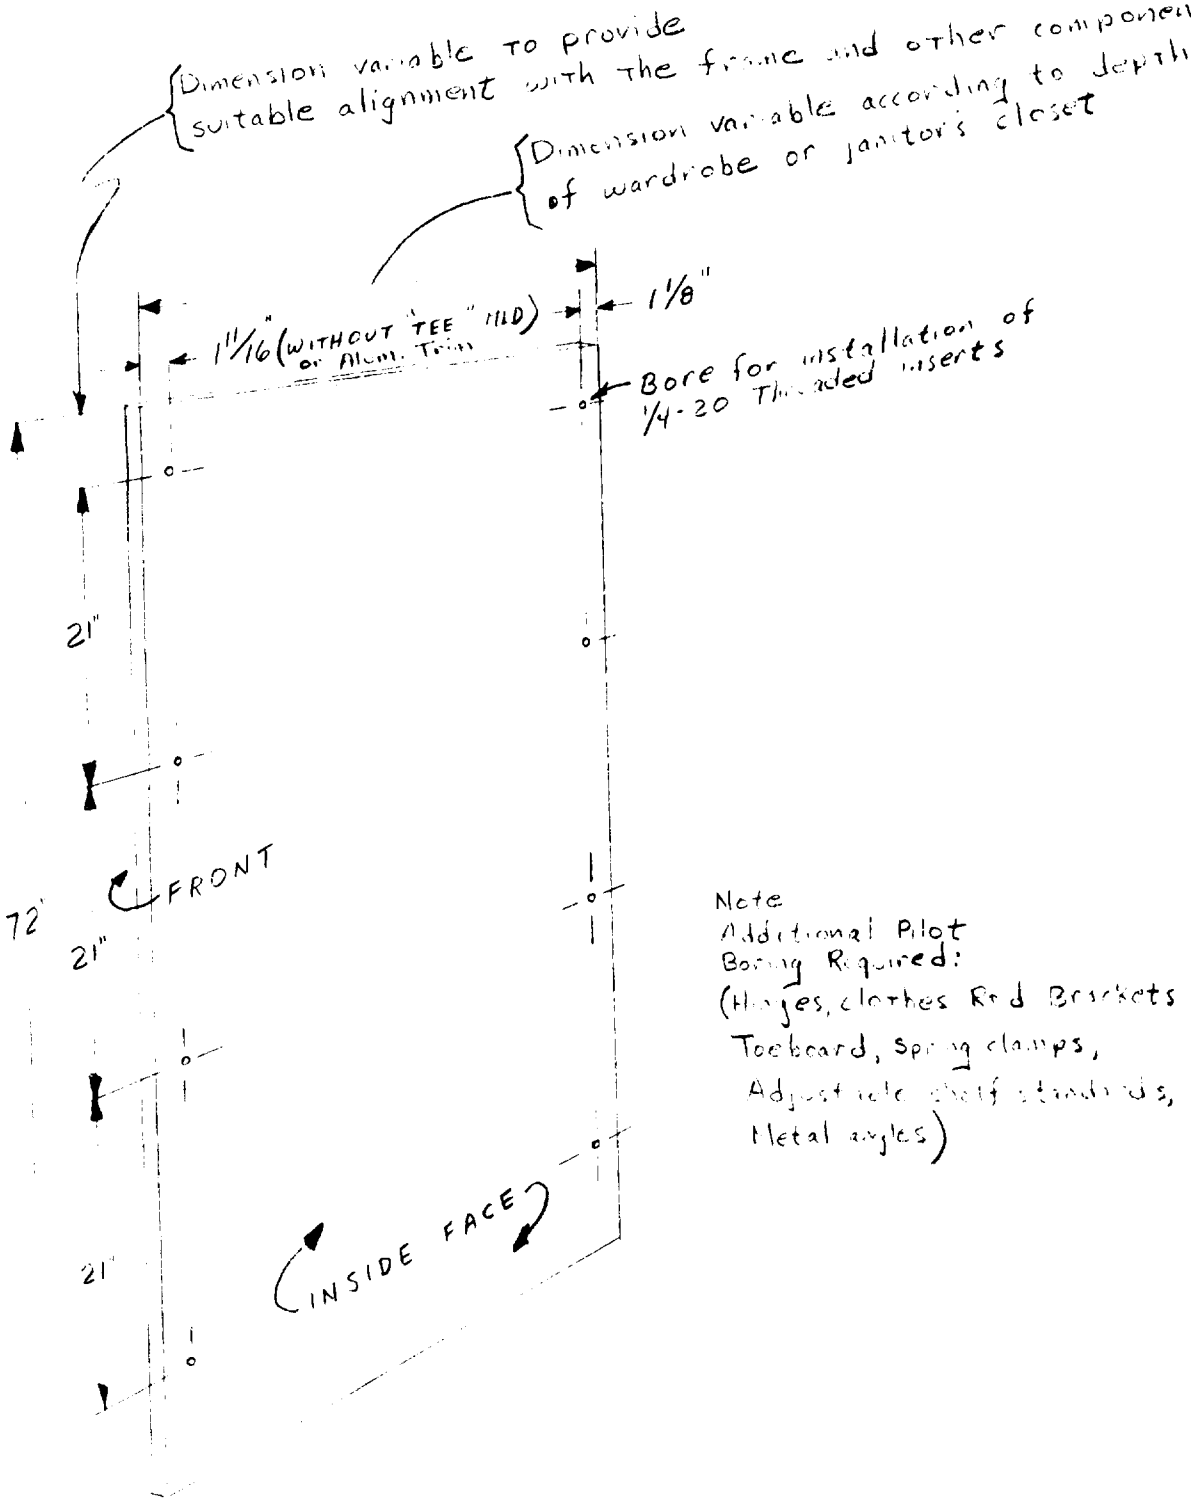


END PANEL (left) TYPE I, II* & III

NO SCALE

FIGURE 16

* Type II: Has notch in lower front corner as shown in Figure 17

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

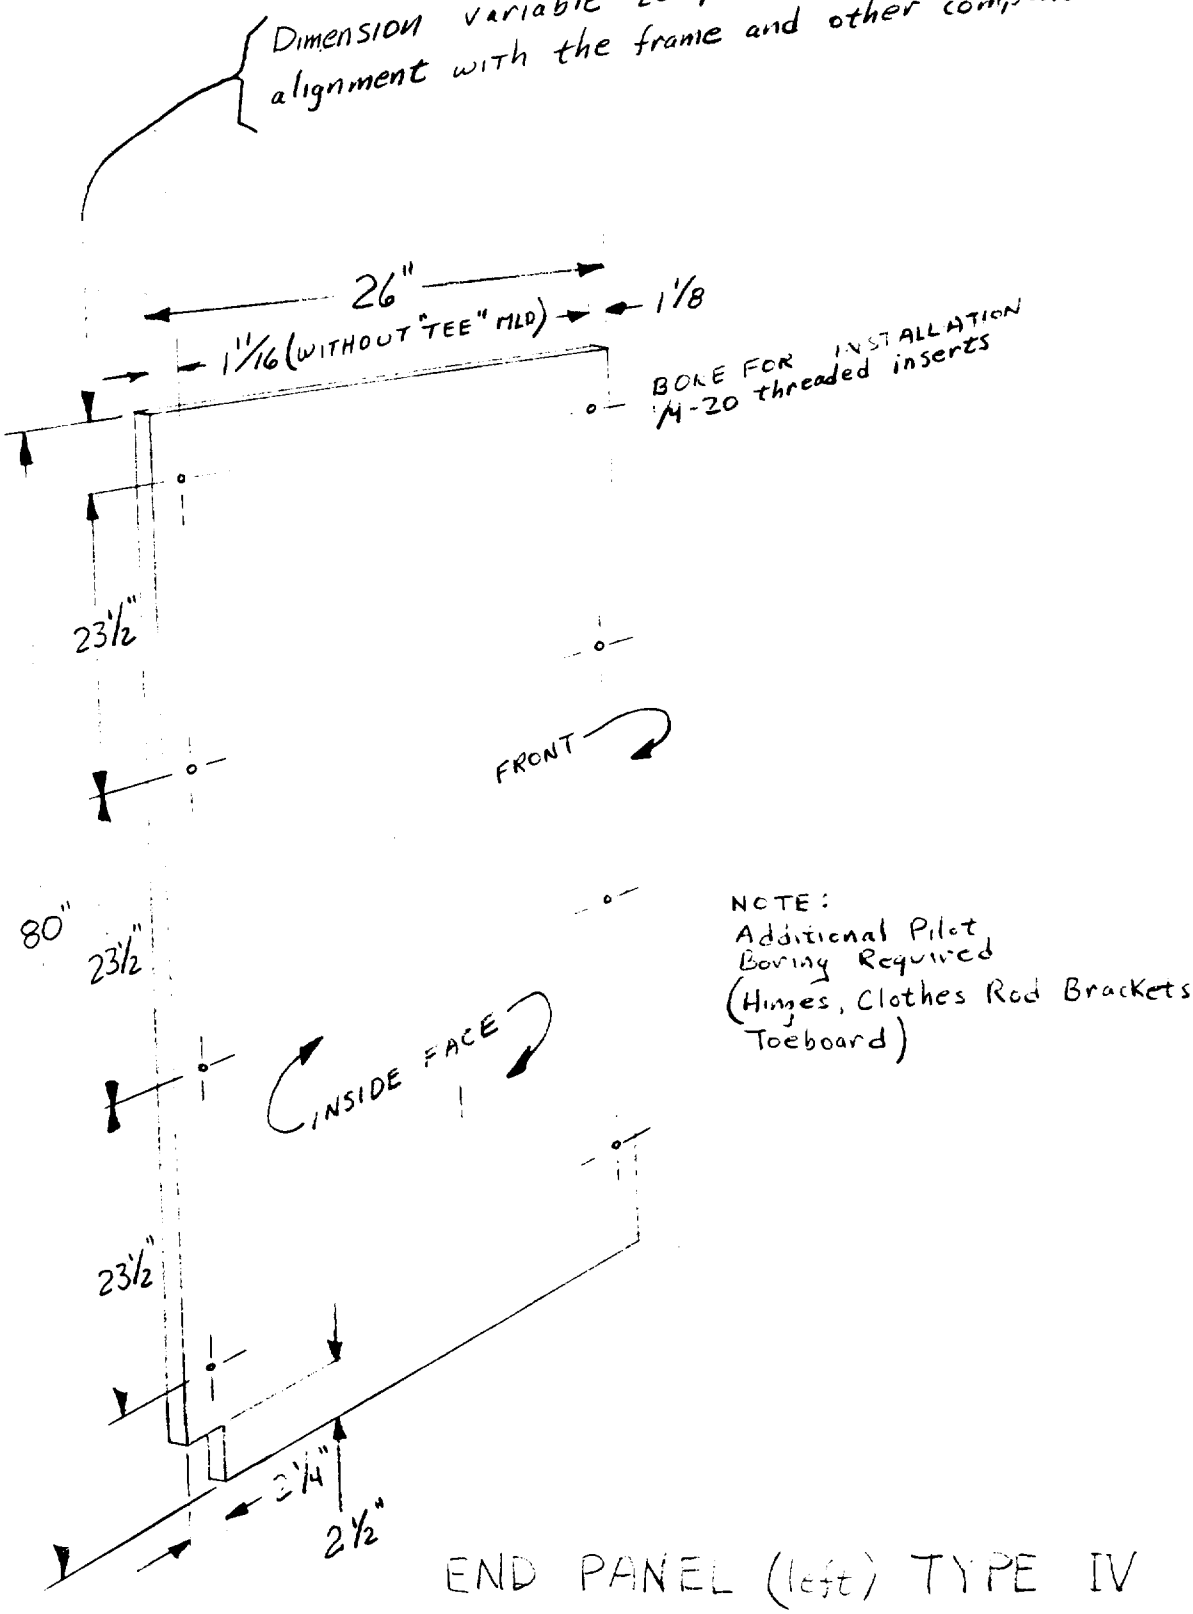

NOTE:
Additional Pilot Boring Required
(Hinges, Clothes Rod Brackets Toeboard)

END PANEL (left) TYPE IV

NO SCALE

FIGURE 17

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

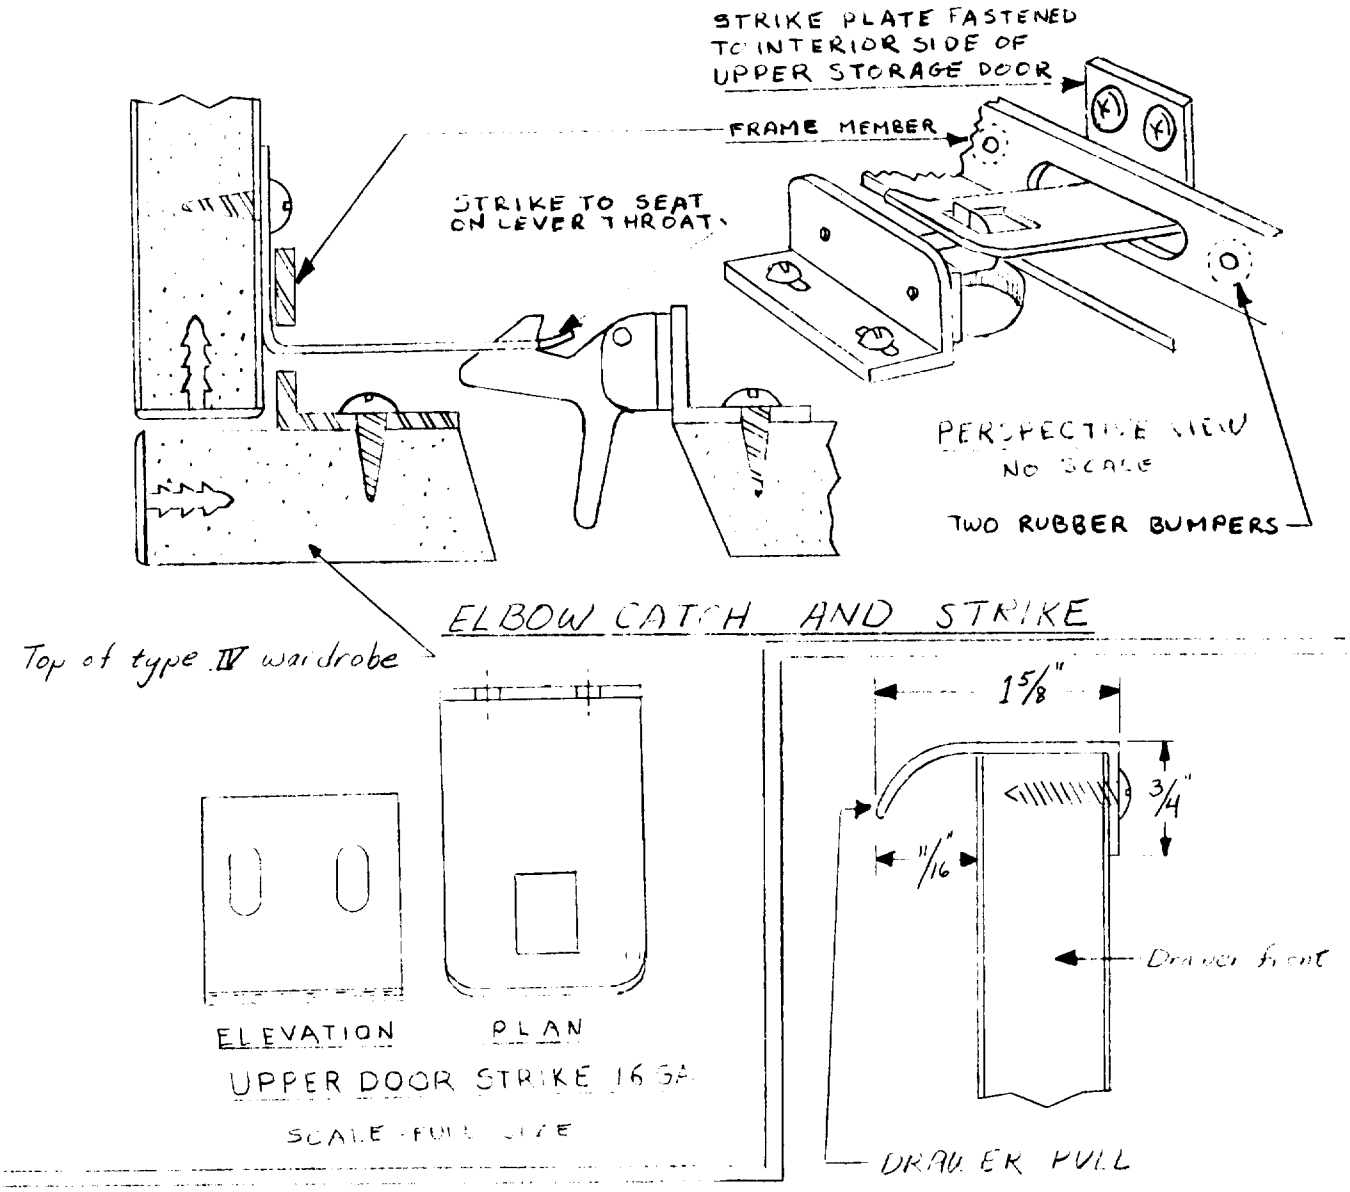


FIGURE 18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.