RR-L-112D
March 16, 1973
SUPERSEDING
Fed. Spec. RR-L-112C
December 15, 1967

FEDERAL SPECIFICATION

LANTERNS, KEROSINE, HAND, GLOBE

This specification was approved by the Commissioner, Federal Supply Services, General Services Administration, for use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers kerosine-burning, hand lanterns with globes, and also provides for the procuring of glass globes separately (see 6.2).

1.2 Classification.

1.2.1 Types and classes. The lanterns, with globes shall be of the following types and classes as specified (see 6.2).

Type I	-	Cold blast, tubular frame.
Class A	-	Large size, with medium globe (style F), 32-ounce minimum capacity, 7/8 inch wick, 45 hours minimum burning time.
Class B	-	Small size, with short globe (style B), 16-ounce minimum capacity, 5/8 inch wick, 30 hours minimum burning time.
Type IV	-	Wire-frame, with short globe (style C or D), 3/8-pint minimum capacity, 5/8-inch wick, 20 hours minimum burning time.

1.2.2 Styles. The globes, when purchased separately, shall be of the following styles, as specified (see 6.2).

Style B (see fig. 1).
Style C (see fig. 2).
Style D (see fig. 3).
Style F (see fig. 4).

FSC 6260

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

QQ-T-191	-	Terne Sheet (Long and Short Ternes).
QQ-T-425	-	Tinplate (Hot Dip and Electrolytic).
QQ-W-461	-	Wire, Steel, Carbon, (Round, Bare and Coated).
QQ-Z-325	-	Zinc Coating, Electrodeposited, Requirements For.
VV-K-211	-	Kerosene.
PPP-B-636	-	Boxes, Shipping, Fiberboard.
PPP-C-843	-	Cushioning Material, Cellulosic.
PPP-F-320	-	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, For Sealing and Securing.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies.)

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers, at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the currentversion before use.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the supplier shall furnish a sample lantern to be procured under this specification for first article inspection and approval (see 4.2, 6.2 and 6.3).

3.2 Standard product. The lanterns delivered under this specification shall be the manufacturer's commercial product, except for changes necessary to comply with the requirements specified herein. All like items furnished on any one contract, including parts and subassemblies thereof, shall be new and interchangeable.

3.3 Materials. Materials shall conform to the requirements specified herein. Materials not definitely specified shall be of the quality normally used by the manufacturer in his standard commercial lantern provided the completed item complies with all provisions of this specification.

3.3.1 Steel, carbon.

3.3.1.1 Uncoated and coated sheet or strip. Uncoated sheet or strip shall be either bright or black. Coated sheet steel shall be zinc-coated, tinplated, or short terne coated. The thickness of the sheet, before any coating or finish is applied, shall be not less than 0.0121-inch to a maximum of 0.0149-inch. The coating shall be tightly adherent and shall thoroughly and evenly cover the base sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.3.1.1.1 Zinc-coating. Zinc-coating of each surface shall conform to the requirements of type II, class 2 of QQ-Z-325.

3.3.1.1.2 Terne sheets, short. Short terne sheets shall conform to class 2, type I, 8 pounds (nominal 8 pounds per double base box), grade A of QQ-T-191.

3.3.1.1.3 Tinplate sheets. The tinplate sheets shall conform to type I, grade 4, electrolytic class 25, dull-matte finish of QQ-T-425.

3.3.1.2 Wire, steel. The round steel wire shall conform to steel numbers 1010 or 1015, finish 5, any temper, class 2 coating of QQ-W-461.

3.3.2 Globes, glass. The globes shall be glass of the borosilicate type, or commercial lime quality glass in accordance with the manufacturer's current commercial practice. The globe colors shall be blue, green, ruby, amber, or clear as specified (see 3.4.3 and 6.2).

3.3.3 Wick. The wick shall be commercial grade cotton woven material of the sizes specified herein.

3.4 Design and construction (general). Design and construction shall be as specified herein for the applicable types, classes, styles and materials required, and the dimensions shown in tables I and II, and on the applicable figures (see 1.2 and figures 1 thru 7).

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the currentversion before use.




Figure 1 - Style B globe for type I, class B lantern.




Figure 2 - Style C globe for type IV lantern.




Figure 3 - Style D globe for type IV lantern.




Figure 4 - Style F globe for type I, class A lantern.

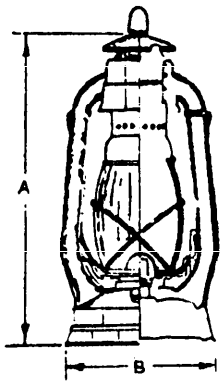


Figure 5 - Type I, class A, large size, medium globe. (See table II for dimensions A and B.)




Figure 6 - Type I, class B, small size, short globe lantern. (See table II for dimensions A and B.)




Figure 7 - Type IV lantern. (See table II for dimensions A and B.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the currentversion before use.

TABLE I. Globes: Dimensions

	Outside rim diameter at bottom B			Outside rim diameter at top T			Over-all height H			Rim height at top M		
	Nominal	Minimum	Maximum	Nominal	Minimum	Maximum	Nominal	Minimum	Maximum	Nominal	Minimum	Maximum
	Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch
Style B (see figure 1)	2-13/16	2-3/4	2-7/8	3-1/4	3-1/16	3-3/8	3-13/16	3-3/4	4	1/4	3/32	9/32
Style C (see figure 2)	3-1/4	3-3/16	3-5/16	2-1/2	2-7/16	2-9/16	4-29/32	4-1/2	5-7/16	--	--	--
Style D (see figure 3)	3-1/4	3-3/16	3-5/16	3-1/4	3-3/16	3-5/16	3-1/4	3-3/16	3-5/16	--	--	--
Style F (see figure 4)	3-7/16	3-1/4	3-1/2	3-1/4	3-3/8	3-5/8	4-5/8	4-9/16	4-11/16	1/4	3/16	5/16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE I. Globes: Dimensions (cont'd)

	Rim height at bottom N			Major diameter				
				Outside diameter D			Height above base K	
	Nominal	Minimum	Maximum	Nominal	Minimum	Maximum	Minimum	Maximum
	Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch
Style B (see figure 1)	3/16	5/32	1/4	4-1/8	3-15/16	4-1/4	1-1/2	2-1/4
Style C (see figure 2)	1/8	3/32	3/16	4-9/16	4-1/2	4-5/8	1-1/4	1-3/4
Style D (see figure 3)	--	--	--	4-15/32	4-13/32	4-17/32	1-1/2	1-3/4
Style F (see figure 4)	1/8	3/32	3/16	4-3/8	4-5/16	4-9/16	2-1/8	2-1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.4.1 Design.

3.4.1.1 Leakage. The completely assembled lantern shall be oiltight when tested as specified in 4.5.1.1. The burner and the filler hole (when furnished) shall show no leakage when tested as specified in 4.5.1.2.

3.4.1.2 Fount. When the lantern is placed on a horizontal plane surface, the bottom of the fount shall not contact the plane except around the rim, and the lantern shall not rock more than 1/16 inch nor lean more than 5°.

3.4.1.3 Burner. The burner shall be a detachable unit. The base shall snugly fit the receiving collar on the fount. The burner shall have a wick spindle having two or three securely fastened toothed wheels. The wick-raiser spindle shall be for raising and lowering the wick from the outside of the lantern. The burner shall be mechanically locked into the fount by means of a bayonet-type lock mechanism formed by the wick-raiser spindle assembly and fount, or by a wing-type locking device within the burner assembly.

3.4.1.4 Illuminant. The burner shall be designed to use kerosene conforming to VV-K-211 as the illuminant. The burner shall maintain a steady, smokeless flame and there shall not be any soot formation on the globe or build-up of soot on the interior of the super structure when tested as specified in 4.5.2.

3.4.1.5 Globe-lifting mechanism. The globe-lifting mechanism (when furnished) shall not permit the globe to fall out when the lantern is held in any position and the globe-lifting mechanism is rapidly operated between the limits of the lifting and lowering motions.

3.4.1.6 Filler hole and cap. The filler hole (when furnished) shall be coated sheet steel, threaded, and securely joined to the fount. The filler cap (when furnished) shall be coated sheet steel, or molded plastic in accordance with the manufacturer's commercial practice, threaded to engage the threads of the filler hole, and provided with a fiber washer to make the filler hole assembly oil tight (see 3.4.1.1 and 4.5.1.2).

3.4.1.7 Bail. The normal position of the bail shall be such that it will remain sufficiently cool for handling when tested as specified in 4.5.3. With the bail upright, the distance between the top of the bail and the top of the dome shall be not less than 4 inches.

3.4.1.8 Globe style and dimensions. For the style hereinafter specified, the shape of the globe shall be in similar configuration to the referenced figures, and the dimensions shall comply with those specified in table I. The globe shall be readily removable without use of tools, excessive pressures, or interference with assembled members.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

or an agent for the Superintendent of Documents. See section 2 of this specification to

3.4.2 Construction.

3.4.2.1 Type I, cold blast tubular frame. The type I, cold blast lantern shall have two hollow side tubes, which shall form air passages between the dome and the base of the burner support. Fresh air shall be drawn into the tubes at the top after having been warmed by the heated dome. The opening above the wick in the burner cap shall provide the outlet for the gases drawn into the base of the burner support through the side tubes. The lantern shall have a fount, burner, burner cap, two globe-guard wires, globe-lifting mechanism, filler hole and cap, bail, wick, dome, and globe.

3.4.2.2 Classes, type I.

3.4.2.2.1 Class A. The type I, class A lantern shall be similar in configuration to figure 5, and shall conform to the dimensions given in table II. The globe shall be style F, and the color shall be as specified (see 6.2). The capacity of the fount shall be not less than 32 fluid ounces. The fount filled to capacity shall not overflow either above the fill opening or into the burner receiving hole when tested as specified in 4.5.4. The burning time shall be not less than 45 hours when tested as specified in 4.5.5. The wick shall be 7/8 inch wide (plus or minus 1/16 inch) by 1/16 inch thick nominal, and not less than 7 inches long.

3.4.2.2.2 Class B. The type I, class B lantern shall be similar in configuration to figure 6, and shall conform to the dimensions given in table II. The globe shall be style B, and the color shall be as specified (see 6.2). The capacity of the fount shall be not less than 16 fluid ounces. The fount filled to capacity shall not overflow either above the fill opening or into the burner receiving collar when tested as specified in 4.5.4. The burning time shall be not less than 30 hours when tested as specified in 4.5.5. The wick shall be 5/8 inch wide (plus or minus 1/16 inch) by 1/16 inch thick nominal, and not less than 7 inches long.

3.4.2.3 Side tubes. The side tubes shall form rigid connecting members between the dome and the fount. Each side tube shall be formed from two pieces of either uncoated or coated sheet steel which are joined together with two inserted joints, and have two continuous flat clinched seams. Tube walls shall be either smooth or beaded. The outside diameter of the tubes shall be not less than 5/8 inch. The lower end of the tubes shall be joined to the fount or burner support with the seams completely soldered or welded. The tops of the tubes shall be inserted into the outer cylinder of the dome and shall be permanently secured.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE II. Lanterns: Dimensions

Type and class	Overall height, bail down plus or minus 10 percent A	Outside diameter of base, minimum B
	Inches	Inches
Type I:		
Class A (see fig. 5)	13-1/4	6-3/4
Class B (see fig. 6)	11-1/2	7-3/4
Type IV (see fig. 7)	9-1/4	6

3.4.2.4 Dome. The dome shall be fabricated from material specified in 3.3.1.1. The dome shall consist of an outer cylinder, inner cylinder, inner baffle, helical wire spring, top plate, and wire pull. The bottom of the inner cylinder shall completely enclose the rim of the top of the globe. The top of the inner cylinder shall have openings to permit burned gases to escape. The inner cylinder shall extend upward through the outer cylinder, and by means of the spring, shall exert sufficient pressure to firmly and securely hold the globe in position. The top plate shall protect the cylinder openings against entrance of rain drops. The wire pull, when operated, shall permit release of the pressure of the inner cylinder on the globe rim. The arrangement of inner baffle, and outer and inner cylinders, shall be such as to make the normal flame of the wick windproof, and prevent mixing of burned gases with the fresh air drawn into the side tubes (see 4.5.7).

3.4.2.5 Fount. The fount shall be coated sheet steel conforming to the requirements specified in 3.3.1.1. The fount shall be one piece drawn or shall be formed of a body and bottom. The fount bottom, if applicable, shall be joined to the body with an oiltight double-folded joint. The bottom shall be stiffened by means of concentric offsets, concaving or embossing.

3.4.2.6 Burner cap. The burner shall be provided with a coated sheet steel or brass cap having an opening above the wick.

3.4.2.7 Globe-guard wires. The globe-guard wires shall be made of wire specified in 3.3.1.2 and shall be 0.105-inch-nominal diameter. The wires shall cross each other at diametrically opposite points adjacent to the unprotected surface of the globe and approximately 2 inches above the bottom edge of the globe. The wires shall be securely fastened to a coated sheet, globe-supporting plate, and shall contact the globe at the points where they cross each other. The globe-supporting plate shall be perforated to admit air into the globe below the flame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.4.2.8 Globe-lifting mechanism. The globe-lifting mechanism shall be fabricated from wire specified in 3.3.1.2, and consist of a formed wire lift with integral lever and a lever guide which locks the lever at the top and bottom of the lift positions. The wire lift shall be steel, zinc-coated, and of a 0.140-inch nominal diameter. The wire lift shall be hinged to the globe-supporting plate and supported at both side tubes. The lever guide shall be securely welded or soldered to one side tube. The lever shall lift the assembly comprising inner cylinder, globe guards, and globe-supporting plate so the wick may be readily ignited with a match.

3.4.2.9 Bail. The bail shall be formed of wire specified in 3.3.1.2 not less than 0.134-inch nor more than 0.156-inch diameter. The bail shall not become detached when tested as specified in 4.5.6.

3.4.2.10 Finish. The lantern shall be finished as follows, according to the kind of sheet metal used:

(a) The lantern shall have the natural zinc or terne-metal finish when the side tubes, the exterior members of the dome, and top and sides of the fount are made of zinc-coated, or terne-metal sheets.

(b) The lantern shall have a durable, tightly adherent enamel, lacquer, or paint finish in accordance with the manufacturer's current commercial practice when any side tube or exterior member of the dome is uncoated or electrolytic tin coated sheet steel. The color shall be dark green, unless otherwise specified (see 6.2).

3.4.3 Type IV, wire frame, short globe (style C or D), 3/8-pint capacity, 5/8-inch wick. The type IV, wire frame lantern shall have a frame made of six or more upright supports, either straight or curved, and two or more horizontal wires. The horizontal wires and at least four of the upright wires shall be not less than 0.148 inch in diameter or 1/16-inch thick by 1/4-inch wide (min) flat steel stampings. Each of the upright wires shall be securely interlocked with each of the horizontal wires, either by means of welded joints or formed wire loops. The frame shall be securely welded to either the fount or air intake member. The lantern shall have a dome, burner, fill opening and cap (when furnished), bail, wick, and globe. The arrangement and fabrication of the dome and air intake member shall provide a normal flame unaffected by the wind or rain when tested as specified in 4.5.7. The lantern shall be similar in configuration to figure 7 and shall conform to the dimensions given in table II. The globe shall be either style C or D at the option of the supplier. Unless otherwise specified (see 6.2) a ruby colored globe shall be furnished. The capacity of the fount shall be not less than 6 fluid ounces, nor more than 16 fluid ounces. The fount filled to capacity shall not overflow either above the fill opening

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the current version before use.

(when furnished) or into the burner receiving collar when tested as specified in 4.5.4. The wick shall be 5/8 inch wide (plus or minus 1/16 inch) by 1/16 inch thick and not less than 7 inches long. The burning time shall be not less than 20 hours when tested as specified in 4.5.5.

3.4.3.1 Dome. The dome shall consist of a perforated globe cover, baffles, globe-cushioning plate with wire spring, steel hinge, and wire cover-locking clip. The cover, baffles, and cushioning plate shall be made of coated sheet steel. The dome shall be hinged to the frame and securely locked with the frame by means of the locking clip. The locking clip shall not release the cover when any opening force is applied with the fingers to the edge or any portion of the cover. The cushioning plate shall, by means of the spring, apply sufficient pressure to the top rim of the globe to firmly hold it in position.

3.4.3.2 Fount. The fount shall be coated sheet steel conforming to the requirements specified in 3.3.1.1. The fount shall be one piece drawn or formed of a body and bottom. The fount bottom, if applicable, shall be joined to the body with an oil-tight double-folded joint, and shall be stiffened by means of a reinforcing wire ring, concentric offsets, concaving, or embossing. The fount shall not leak when tested as specified in 4.5.1.2.

3.4.3.3 Air-intake member. The air-intake member (when furnished) shall be either uncoated or coated sheet steel and permanently secured to the fount with an oiltight joint. It shall have perforations through which air is supplied to maintain the burner flame. It shall have a burner-receiving collar, of either uncoated or coated sheet steel which shall be either soldered to the fount, or permanently fastened to the fount with an oiltight inserted joint. The air intake member shall not leak when tested as specified in 4.5.1.2.

3.4.3.4 Bail. The bail shall be formed of zinc-coated steel wire not less than 0.134 inch nor more than 0.156 inch in diameter. The ends of the bail shall be looped and permanently attached to the frame. The bail shall not become detached when tested as specified in 4.5.6.

3.4.3.5 Finish. Unless otherwise specified (see 6.2), the lantern shall have a durable, tightly adherent enamel finish in accordance with industry practice. The color shall be bright red.

3.5 Identification marking. Each lantern shall be permanently embossed with the manufacturer's identification and model designation. Letters, numerals, and other characters shall be of such size as to be clearly legible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

3.6 Workmanship. The finished lantern shall be clean and free from sharp edges, burrs or splinters. All finished surfaces shall be adherent and free from areas of no coating, rust, cracks, blisters, peeling, embedded foreign matter, fins, burrs, sharp edges, slivers, splinters. Welding shall be continuous, completely fused, and shall be free of burn or pinholes, cracks, fractures, slag or flux deposits. Soldering shall have complete fusion and be smooth and free of flux and flux residue.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required, it shall be examined for defects listed in table III, dimensions specified, and tested as specified in 4.5.1 through 4.5.7. The presence of any visual defect, dimensions not within specified requirements or failure to pass the tests shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Except where otherwise indicated herein, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.2 End item inspection. The lot shall consist of all lanterns with globes of the same color, type, class and style; or globes of the same style and color, as applicable. The sample unit shall be one lantern complete with globe, or one globe, as applicable.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:08Z
Check the source to verify that this is the currentversion before use.

4.4.2.1 Visual examination. The end item shall be examined for the applicable defects classified in table III. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE III. Classification of defects

Examine	Defect	Classification Major	Classification Minor
Finish			
Enameled, lacquered or painted surfaces	Not specified type and color		X
	Blistered, peeled, cracked, area of no coating, embedded foreign matter, nonadherent, area of rust	X	
Metallic coatings	Not specified type, area of no coating (on nonpainted surfaces)	X	
	Coating not adherent	X	
	Gritty surface, not smooth		X
Globe	Wrong color	X	
Design, construction and workmanship (general applicable to all components and assemblies)	Component fractured, broken, split, punctured, torn, cracked, bent, dented, creased, bowed, sprung, loose, misplaced or otherwise malformed	X	
	Wrong type, class or style	X	
	Burrs, slivers or splinters	X	
	Any functioning component that requires abnormal force to operate		X
	Globe falls out when lever mechanism is raised or lowered in any position	X	
	Not clean		X
Fount (types I and IV as applicable)	Bottom not stiffened as specified		X
	Bottom not joined to body by double fold joint (when applicable)		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Design, construction and workmanship (cont'd)			
Burner cap	Opening missing in cap above wick	X	
	Cap not coated sheet steel or brass		X
Globe-guard wires (type I)	Wires do not cross each other at diametrically opposite points, adjacent to unprotected surface of globe	X	
	Wire not securely fastened to globe-supporting plate		X
	Wires do not contact globe at crossing point		X
	Globe-supporting plate not perforated	X	
Globe-lifting mechanism	Component missing i.e., formed wire lift with integral lever, lever guide	X	
	Wire lift not hinged to globe-supporting plate	X	
Dome (type I)	Component missing i.e., outer cylinder, inner cylinder, inner baffle, helical wire spring, top plate, wire pull	X	
	Bottom of inner cylinder does not completely enclose rim of globe top		X
	Holes in top cylinder missing (type I)	X	
	Spring missing from inner cylinder	X	
	Wire pull inoperative	X	
Dome (type IV)	Wire frame (type IV) upright support missing		X
	Horizontal wire missing	X	
	Upright support not interlocked with horizontal wire as specified	X	
	Frame not welded to fount or intake member	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Design, construction and workmanship (cont'd)			
Dome (type IV) (cont'd)	Component missing, i.e., dome cover burner, filler opening and cap (when furnished), bail, wick, globe, baffles, globe-cushioning plate, steel hinge and wire locking clip	X	
	Not supported at both side tubes	X	
	Lever guide not welded or soldered to one side tube	X	
	Lever does not operate as specified	X	
Air intake (when furnished) (type IV)	Perforations missing	X	
	Burner collar missing		X
	Collar not soldered or welded to fount or fastened with inserted joint		X
Welding (when applicable)	Missing, burn or pin holes, cracked, fractured, not continuous, not adherent or not fused	X	
	Slag inclusion, not smooth and uniform, scale or flux deposits not removed		X
Soldering (when applicable)	Not adherent or fused	X	
	Not clean (flux or flux residue not removed) not smooth		X
Bail	Not as specified		X
Marking	Missing, incomplete, illegible; not as specified		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the currentversion before use.

4.4.2.2 Dimensional examination. The lantern and globes shall be examined for compliance with dimensions specified. Any dimension not within specified tolerances shall constitute a defect. The inspection level shall be S-2 with an AQL of 6.5 defects, expressed in terms of defects per hundred units.

4.4.2.3 Testing of the end item. When a first article is not required, the first produced lantern shall be tested in accordance with 4.5.2, 4.5.3, 4.5.4, 4.5.5 and 4.5.7. Production lots shall be tested for leakage and pull of bail in accordance with 4.5.1 and 4.5.6, using inspection level S-1 with and AQL of 4.0, expressed in terms of defects per hundred units.

4.4.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. Defects shall be as indicated in table IV. The sample unit shall be one container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

TABLE IV. Examination of preparation for delivery

Examine	Defect
Markings	Omitted; incorrect; illegible; of improper size, location, sequence or method of application
Materials	Component missing or damaged
Workmanship	Bulging or distortion of containers Cushioning inadequate, improper or missing
Contents	More or less than required

4.4.3.1 Examination for closure and strapping of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing and strapping shall be in accordance with the appendix of PPP-B-636.

4.5 Tests.

4.5.1 Leakage.

4.5.1.1 Assembled lantern. The assembled lantern, with the fount filled to capacity with kerosene, shall be placed on a level surface for 1 hour. Any evidence of leakage shall constitute failure to comply with 3.4.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

4.5.1.2 Burner and fill opening. The lantern fount, filled to capacity with kerosene and not ignited, shall be inclined at an angle of 45° with the vertical, preferably by securing its base to a surface inclined 45° with the horizontal. During the test, the filler cap shall be secured and fill opening shall be at the lowest elevation. Any evidence of leakage through the filler hole or burner shall constitute failure to comply with 3.4.1.1, 3.4.1.6, 3.4.3.2, and 3.4.3.3.

4.5.2 Smokeless flame. The lantern fount shall be filled to capacity and the wick ignited. The lantern shall burn with a normal flame for 3 hours. Any evidence of flame smoking, soot formation on the globe, or buildup of soot on the interior of the superstructure shall constitute failure to comply with 3.4.1.4.

4.5.3 Heat transmission. After the lantern has been burning with a normal flame for 3 hours, the lantern shall be picked up by the bail. Failure to comply with 3.4.1.7 shall be evident if the bail is too hot to handle with bare hands.

4.5.4 Capacity test. Using an adequate liquid measure, the specified amount of kerosene shall be poured into the fount. Failure of the fount to receive the specified quantity of fuel shall constitute failure to comply with 3.4.2.2.1, 3.4.2.2.2 and 3.4.3.

4.5.5 Burning time. With the lantern filled to capacity and the flame adjusted to normal size, the burning time shall be tested without any further adjustment or addition of kerosene. Failure to comply with 3.4.2.2.1 and 3.4.2.2.2 shall be evident if the lantern extinguishes in less than the specified time.

4.5.6 Pull of bail. A pull of 30 pounds shall be applied at either end of the bail, normal to the side tubes, with the bail either down or upright. Removal of the handle, under load, shall constitute failure to comply with 3.4.2.9 and 3.4.3.4.

4.5.7 Wind and rain test. An atmosphere simulating a wind and rain storm shall be produced. The wind velocity shall be not less than 10 miles per hour. The lantern shall be ignited and subjected to this atmosphere for not less than 30 minutes. Any evidence of flame failure or abnormality of the flame shall constitute failure to comply with 3.4.2.4 and 3.4.3.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5.1.1 Level A.

5.1.1.1 Lantern, complete with globe. The globe of each lantern shall be wrapped in cellulosic cushioning material conforming to type II, class B of PPP-C-843. Sufficient cushioning material shall be used over the top and bottom edges of the globe as necessary to prevent movement or vibration while in place within the lantern frame.

5.1.1.2 Globes only (when procured as a separate item). Each globe shall be completely wrapped with cushioning material specified in 5.1.1.1. The wrap shall be secured with 1-inch width gummed paper tape conforming to type III, grade B of PPP-T-45.

5.1.2 Level C. Lanterns with globes, and globes only shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Twelve lanterns, complete with globes of the same type, class, and color; or twelve globes of one style and color only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. Each shipping container shall be provided with a full height corrugated fiberboard liner, top and bottom pads, and full height interlocking partitions to provide an individual cell for each item being packed. The top and bottom pads and partitions shall conform to type CF, class domestic, variety SW, B-flute, grade 275 of PPP-F-320. Closure, waterproofing by means of tape, and reinforcing with flat strapping or tape banding shall be in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Twelve lanterns complete with globes, of the same type, class, and color, or twelve globes of one style and color only, packaged as specified in 5.1, shall be packed as specified in 5.2.1, except that shipping container shall conform to style RSC-L, type CF, variety SW, or type SF, class domestic of PPP-B-636; waterproofing shall not be required; and closure shall be in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be a V3c, V3s or V4s, fabricated and closed in accordance with PPP-B-636.

5.2.3 Level C. Lanterns with globes, and globes only, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

5.3 Marking. Marking shall be in accordance with 5.3.1 or 5.3.2 as specified (see 6.2).

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military requirement. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2.1 Additional marking. Each shipping container containing lanterns complete, or globes only shall be marked in accordance with the special handling marking requirements applicable to fragile items and the word "glass" in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The lanterns covered by this specification are intended for illumination and signal purpose.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification
(b) Type and class required or style of globe required (see 1.2.1 and 1.2.2).
(c) When first article is required (see 3.1, 4.3 and 6.3).
(d) Color of glass globes required (see 3.3.2, 3.4.2.2.1, 3.4.2.2.2, and 3.4.3).
(e) Color and finish of lantern required if other than specified (see 3.4.2.10 and 3.4.3.5).
(f) When ruby colored glass globe for type IV is not required (see 3.4.3).
(g) Selection of applicable level of packaging and packing (see 5.1 and 5.2).
(h) When weather-resistant grade fiberboard is required for level B pack (see 5.2.2.1).
(i) Whether civil or military marking is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of Armed Services Procurement Regulations ASPR 7-104.55. The first article should be a preproduction sample, initial production item, or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

CUSTODIANS:

Army - GL
Navy - YD
Air Force - 82

Review activity:

Army - MD

User activities:

Army - ME
Navy - MC

Preparing activity:

Army - GL

CIVIL AGENCY COORDINATING ACTIVITIES:

COMMERCE-NBS
DC GOVT-DCG
GSA-FSS
USAF-AFS

Project No. 6260-0039

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 20 cents each.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:08Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Lanterns, Kerosine, Hand, Globe RR-L-112D

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:08Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. ARMY NATICK LABORATORIES
NATICK, MASS. 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AMXRET-EQS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314

Commander
US Army Natick Laboratories
ATTN: AMXRET-EQS
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:08Z
Check the source to verify that this is the current version before use.