INCH-POUND
A-A-55571/3H
13 November 2023
SUPERSEDING
A-A-55571/3G
17 September 2018

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

CIRCUIT BREAKER, 28 VOLTS (V) DC, MANUAL RESET, WATERPROOF, 105 AMPERES (A) TO 200 A

The General Services Administration has authorized the use of this commercial item description CID for all federal agencies.

The complete requirements for procuring the circuit breakers described herein shall consist of this document and the issue in effect of CID A-A-55571.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES).

AA55571	/03	-	001
CID number	Applicable CID specification sheet (two digits)		Dash number (see table I)

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Circuit breakers supplied to this CID specification sheet shall be as specified herein (see figure 1).

Ampere rating. The ampere rating shall be as specified in table I.

Voltage rating. The voltage rating shall be 28 V dc maximum.

Endurance. The minimum expected cycling life shall be 500 cycles at 200 percent of rated current.

TABLE I. Characteristics.

CID dash number AA55571/03-	Ampere rating
001	175
002	200

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5925

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

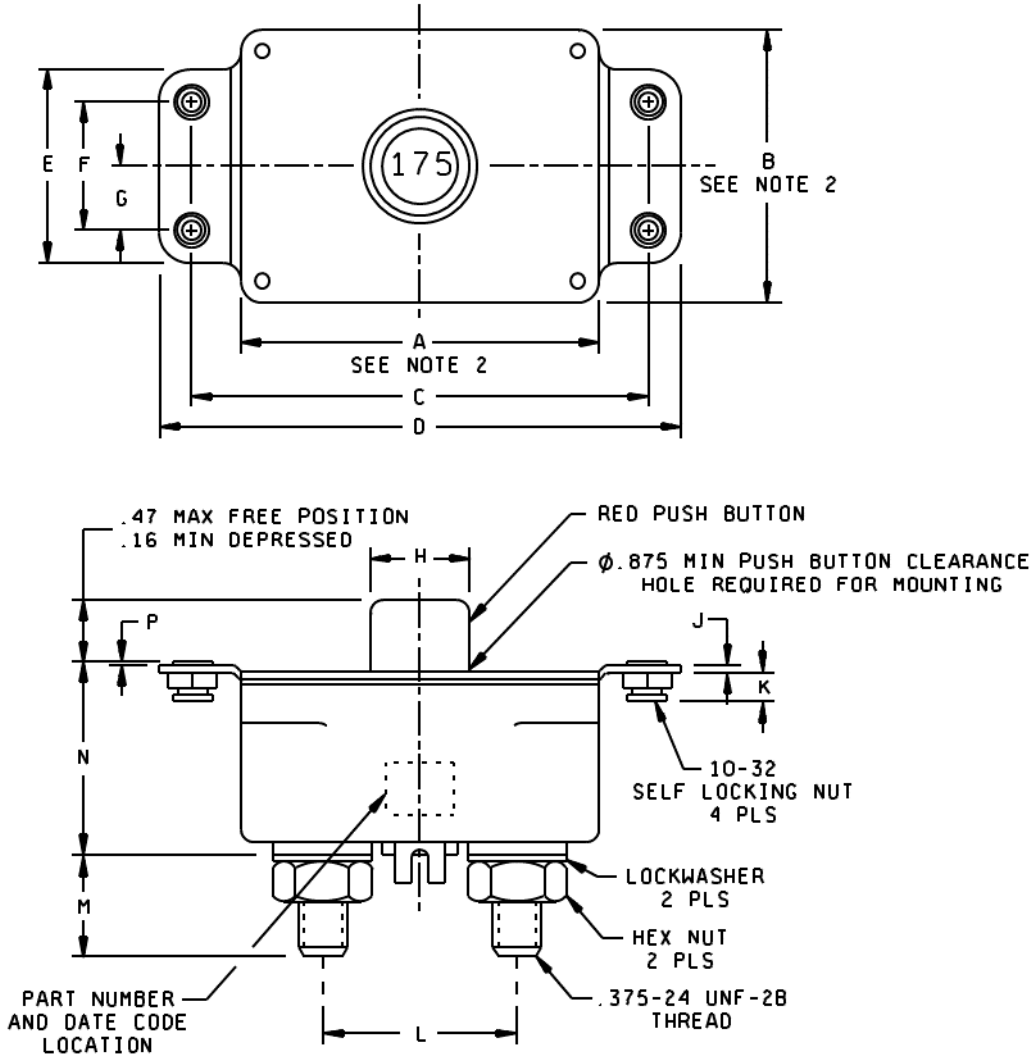


FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

Ltr	Inches		mm	
	Min	Max	Min	Max
A	2.719	2.781	69.06	70.64
B	2.094	2.156	53.19	54.76
C	3.469	3.531	88.11	89.69
D	N/A	4.010	N/A	101.85
E	1.469	1.531	37.31	38.89
F	0.969	1.031	24.61	26.19
G	0.469	0.531	11.91	13.49
H	N/A	0.780	N/A	19.81
J	0.031	0.093	0.78	2.36
K	0.229	0.239	5.82	6.07
L	1.485	1.515	37.72	38.48
M	N/A	0.765	N/A	19.43
N	N/A	1.500	N/A	38.10
P	0.010	0.020	0.25	0.51

NOTES:

1. Dimensions are in inches.
2. Dimensions exclude flexible gasket material.
3. Tolerance is ±.031 inch (0.79 mm), unless otherwise specified.

FIGURE 1. Configuration and dimensions - Continued.

Speed of operation at 25°C (77°F) at 200 percent rated current. Circuit breakers supplied to this CID specification sheet shall meet the minimum and maximum opening time requirements as specified in table II.

TABLE II. Speed of operation at 77°F (25°C).

200 percent of rated current	Opening time in seconds	
	Minimum	Maximum
	8	100

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See classification information for PIN format example.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

MFR's CAGE	MFR's name and address
82647	Sensata Technologies, Incorporated 529 Pleasant Street Attleboro, MA 02703-2421 Phone number (508) 236-3800 Facsimile number (508) 236-1598 E-mail: klixon@sensata.com Uniform Resource Locator (URL): http://www.sensata.com

Part number (P/N) supersession data. These CID specification sheet PINs supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. P/N supersession data.

Dash number (see table I) AA55571/03-	MFR's CAGE	MFR's P/N 1/
001	82647	7855-6-175
002	82647	7855-6-200

1/ The manufacturer's P/N shall not be used for acquisition to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the commercial products in table III were reviewed and could be replaced by the CID P/N shown. For actual part marking requirements, see the marking paragraph of A-A-55571.

National stock number (NSN). The following is a list of NSN's assigned which correspond to this CID specification sheet. The list is for information only and may not be indicative of all possible NSN's associated with the CID specification sheet. For up to date information on assigned NSN's, please contact the aforementioned DLA Land and Maritime office listed in A-A-55571.

TABLE IV. NSN's.

Dash number (see table I) AA55571/03-	NSN
001	---
002	5925-01-430-9485

Changes from previous issue. Marginal notations are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Navy - EC
Air Force - 85
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FAS

Preparing activity:

DLA-CC

Project 5925-2024-009

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:54Z
Check the source to verify that this is the current version before use.