A-A-55610A
4 APRIL 1995
SUPERSEDING
A-A-55610
30 JANUARY 1995

COMMERCIAL ITEM DESCRIPTION

WASHER, LOCK-SPRING, HELICAL, REGULAR (MEDIUM) SERIES

THE GENERAL SERVICES ADMINISTRATION HAS AUTHORIZED THIS COMMERCIAL ITEM DESCRIPTION FOR ALL FEDERAL AGENCIES. THIS CID SUPERSEDES MS35338L.

1. SCOPE: THIS COMMERCIAL ITEM DESCRIPTION (CID) DEPICTS THE REQUIREMENTS FOR A REGULAR (MEDIUM) SERIES HELICAL LOCK-SPRING WASHER.

2. SALIENT CHARACTERISTICS.

2.1. MATERIAL SHALL BE:

STEEL, CARBON, IN ACCORDANCE WITH ASME B18.21.1.

CORROSION-RESISTANT STEEL (NON-MAGNETIC) WASHERS SHALL BE TYPE 316 (UNS S31600) THRU 1/4 (.250) AND TYPE 300 SERIES (UNS S30200 TO UNS S31600) FOR ALL OTHER SIZES, AND CORROSION-RESISTANT STEEL (MAGNETIC) WASHERS SHALL BE TYPE 420 (UNS S42000).

PHOSPHOR BRONZE IN ACCORDANCE WITH ASME B18.21.1.

TIN-BRASS, COMPOSITION 425 (UNS C42500).

NICKEL-COPPER-ALUMINUM ALLOY, FORM 2 (UNS N05500).

2.2. FINISHES SHALL BE:

CARBON STEEL WASHERS - PHOSPHATE COATING; MECHANICALLY DEPOSITED ZINC.

CORROSION-RESISTANT STEEL WASHERS - PASSIVATED, BLACK OXIDE COATING (FOR CRES 300 SERIES ONLY).

PHOSPHOR BRONZE AND TIN-BRASS WASHERS SHALL BE CADMIUM OR ZINC PLATED. A MAGNET SHALL BE USED FOR DETECTION VERIFICATION PURPOSES TO DIFFERENTIATE BETWEEN CARBON STEEL WASHERS AND PHOSPHOR BRONZE AND TIN-BRASS WASHERS SPECIFIED HEREIN.

NICKEL-COPPER-ALUMINUM ALLOY WASHERS - UNCOATED.

BENEFICIAL COMMENTS, RECOMMENDATIONS, ADDITIONS, DELETIONS, CLARIFICATIONS, ETC., AND DATA WHICH MAY IMPROVE THIS DOCUMENT SHOULD BE SENT TO: DEFENSE INDUSTRIAL SUPPLY CENTER, ATTN: DISC-EED, 700 ROBBINS AVENUE, PHILADELPHIA, PA 19111-5096.

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.

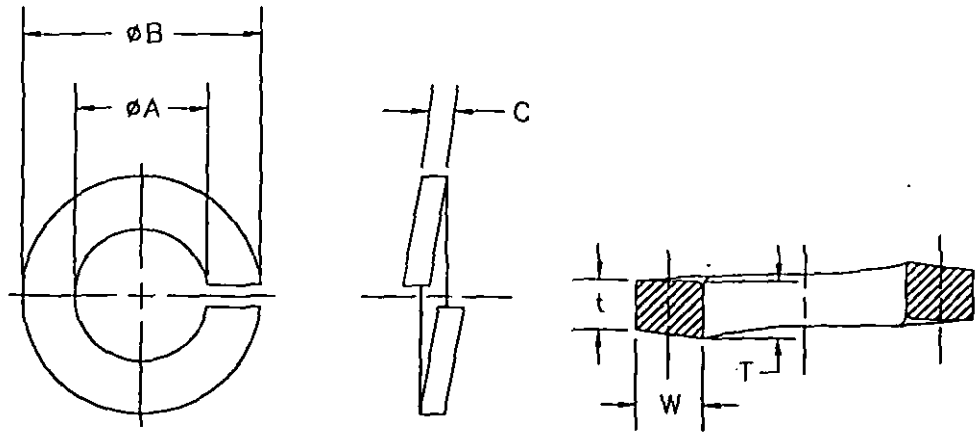


TABLE I. DASH NUMBERS AND DIMENSIONS

NOMINAL SIZE	CARBON STEEL		PH BRZ OR TIN BRS	NICKEL COPPER ALLOY	CRES 300 SERIES	CRES 420	øA (ID)		øB (OD)	WASHER SECTION	
	ZINC	PHOS								W WIDTH	C THICK $\frac{T+t}{2}$
	DASH NUMBERS						MIN	MAX	MAX	MIN 1/	MIN 1/
NO.2 (.086)	39	58	96	115	134	153	.088	.094	.172	.035	.020
NO.4 (.112)	40	59	97	116	135	154	.114	.120	.209	.040	.025
NO.6 (.138)	41	60	98	117	136	155	.141	.148	.250	.047	.031
NO.8 (.164)	42	61	99	118	137	156	.167	.174	.293	.055	.040
NO.10 (.190)	43	62	100	119	138	157	.193	.200	.334	.062	.047
1/4 (.250)	44	63	101	120	139	158	.252	.260	.487	.109	.062
5/16 (.312)	45	64	102	121	140	159	.314	.322	.583	.125	.078
3/8 (.375)	46	65	103	122	141	160	.377	.385	.680	.141	.094
7/16 (.437)	47	66	104	123	142	161	.440	.450	.776	.156	.109
1/2 (.500)	48	67	105	124	143	162	.502	.512	.869	.171	.125
9/16 (.562)	49	68	106	125	144	163	.564	.574	.965	.188	.141
5/8 (.625)	50	69	107	126	145	164	.628	.641	1.073	.203	.156
3/4 (.750)	51	70	108	127	146	165	.753	.766	1.265	.234	.188
7/8 (.875)	52	71	109	128	147	166	.878	.894	1.459	.266	.219
1 (1.000)	53	72	110	129	148	167	1.003	1.024	1.656	.297	.250
1-1/8 (1.125)	54	–	111	130	149	168	1.129	1.153	1.847	.328	.281
1-1/4 (1.250)	55	–	112	131	150	169	1.254	1.280	2.036	.359	.312
1-3/8 (1.375)	56	–	113	132	151	170	1.379	1.408	2.219	.391	.344
1-1/2 (1.500)	57	–	114	133	152	171	1.504	1.534	2.419	.422	.375

1/ SEE NOTE 4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.

3. QUALITY CONFORMANCE PROVISIONS:

3.1. THE SUPPLIERS SHALL BE RESPONSIBLE FOR THOSE IN PROCESS CONTROLS AND INSPECTIONS NECESSARY TO SUPPLY A PRODUCT CONSISTENTLY CONFORMING TO THE REQUIREMENTS OF THIS DOCUMENT.

3.2. UPON REQUEST, THE SUPPLIER WILL CERTIFY WITH DOCUMENTED TEST/INSPECTION EVIDENCE, THAT THE PART SUPPLIED MEET THE REQUIREMENTS OF THIS DOCUMENT.


4. NOTES:

4.1. DIMENSIONS ARE IN INCHES.

4.2. WASHER SECTION WIDTH AND MEAN SECTION THICKNESS SHALL BE IN ACCORDANCE WITH ASME B18.21.1.

4.3. THE PART IDENTIFYING NUMBER (PIN) SHALL CONSIST OF THE BASIC CID FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE I.

EXAMPLE: AA55610 - 40



AA55610-40 INDICATES: WASHER, LOCK-SPRING, HELICAL, REGULAR (MEDIUM) SERIES, NO.4 NOMINAL SIZE CARBON STEEL, ZINC PLATING.

4.4 CHANGES FROM PREVIOUS ISSUE. THE MARGINS OF THIS CID ARE MARKED WITH VERTICAL LINES TO INDICATE WHERE CHANGES (ADDITIONS, MODIFICATIONS, CORRECTIONS, DELETIONS) FROM THE PREVIOUS ISSUE WERE MADE. THIS WAS DONE AS A CONVENIENCE ONLY AND THE GOVERNMENT ASSUMES NO LIABILITY WHATSOEVER FOR ANY INACCURACIES IN THESE NOTATIONS. BIDDERS AND CONTRACTORS ARE CAUTIONED TO EVALUATE THE REQUIREMENTS OF THIS DOCUMENT BASED ON THE ENTIRE CONTENT IRRESPECTIVE OF THE MARGINAL NOTATIONS AND RELATIONSHIP TO THE LAST PREVIOUS ISSUE.

TABLE II. CROSS - REFERENCE TABLE.

CANCELLED MS PIN	REPLACEMENT CID PIN
MS35338- * 1/	AA55610 - * 1/

1/ * REPRESENTS THE SAME DESIGNATION CODES FOR BOTH MS AND CID PINS.

MILITARY INTERESTS

CUSTODIANS
NAVY - AS
ARMY - AR
AIR FORCE - 99

REVIEWER:
NAVY - MC
ARMY - AT, AV, ER, GL, ME, MI
AIR FORCE - 82
NATIONAL SECURITY AGENCY - NS

PREPARING ACTIVITY
DLA-IS

(PROJECT: 5310-2053)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.