A-A-55613
29 JUNE 1995
SUPERSEDING
AN508A
23 MARCH 1984

COMMERCIAL ITEM DESCRIPTION

SCREW, MACHINE, ROUND HEAD (FOR ELECTRICAL USE)

The General Services Administration has authorized this Commercial Item Description (CID) for all Federal Agencies.

1. SCOPE: This document depicts the requirements for round head machine screw (for electrical use).

2. SALIENT CHARACTERISTICS:

   2.1 Material: Brass, leaded or nonleaded (UNS C23000, C24000, C26000, C26200, C26800, C27000, C27200, C27400, C28000, C33000, C33100, C33200, C33500, C34000, C34200, C34400, C34500, C34700, C34800, C35000, C35300, C35600, C36000, C37000, C37700, C46200, C46400, C46500, C46600, C46700, C48200, C48500).


   2.2 Finish: Silver plate or tin plate.

   2.3 Screw threads shall be in accordance with ASME B1.1.

3. QUALITY CONFORMANCE PROVISIONS:

   3.1 The suppliers shall be responsible for those in-process controls and inspections necessary to supply a product consistently conforming to the requirements of this document.

   3.2 Upon request, the supplier will certify with documented test/inspection evidence that the part supplied meets the requirements of this document.

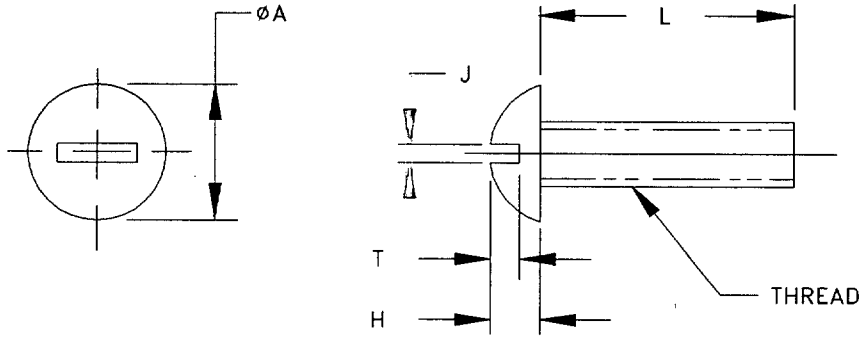

4. PACKAGING:

   4.1 Preservation, packing, labeling, and marking shall be in accordance with ASTM D3951, unless otherwise specified in the contract or order.

BENEFICIAL COMMENTS, RECOMMENDATIONS, ADDITIONS, DELETIONS, CLARIFICATIONS, ETC., AND DATA WHICH MAY IMPROVE THIS DOCUMENT SHOULD BE SENT TO: DEFENSE INDUSTRIAL SUPPLY CENTER. ATTN: DISC-ECC, 700 ROBBINS AVENUE, PHILADELPHIA, PA 19111-5096.

ASMC N/A

FSC 5305

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.

TABLE I. DIMENSIONS

THREAD	HEAD DIAMETER A	HEAD HEIGHT H ±.006	SLOT WIDTH J	SLOT DEPTH T
4-40 UNC-2A	.202 ±.009	.081	.034 ±.006	.051 ±.008
6-32 UNC-2A	.250 ±.010	.097	.039 ±.006	.059 ±.009
8-32 UNC-2A	.298 ±.011	.113	.044 ±.006	.067 ±.010
10-32 UNF-2A	.347 ±.012	.130	.048 ±.007	.075 ±.011

TABLE II. DASH NUMBERS

LENGTH L +.000 −.030	4-40	6-32	8-32	10-32
	DASH NUMBERS			
.125 (1/8)	-4-2			
.188 (3/16)	-4-3	-6-3	-8-3	-10-3
.250 (1/4)	-4-4	-6-4	-8-4	-10-4
.313 (5/16)	-4-5	-6-5	-8-5	-10-5
.375 (3/8)	-4-6	-6-6	-8-6	-10-6

TABLE III. CROSS-REFERENCE

CANCELLED PIN AN508	REPLACEMENT PIN CID AA55613	CANCELLED PIN AN508	REPLACEMENT PIN CID AA55613
-4-2	-4-2	-8-3	-8-3
-4-3	-4-3	-8-4	-8-4
-4-4	-4-4	-8-5	-8-5
-4-5	-4-5	-8-6	-8-6
-4-6	-4-6	-10-3	-10-3
-6-3	-6-3	-10-4	-10-4
-6-4	-6-4	-10-5	-10-5
-6-5	-6-5	-10-6	-10-6
-6-6	-6-6		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.

5. NOTES:

5.1 All dimensions are in inches.


5.2 Dimensions apply after plating.

5.3 Interpret drawing in accordance with ANSI Y14.5M.

5.4 Screws shall be free from all burrs, seams, laps, loose scales, and other defects that may affect serviceability.

5.5 Part Identification Number (PIN) shall consist of the basic Commercial Item Number followed by a dash number from Table II.

Example: AA55613 - 4-4

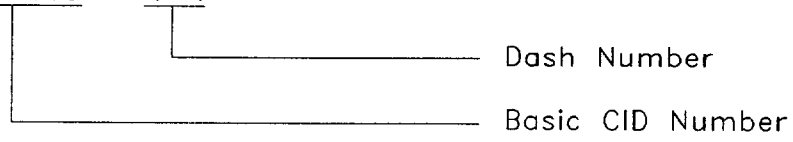

AA55613-4-4 - Indicates a screw, machine, round head (for electrical use) #4-40 UNC-2A thread, 1/4 inch long.

MILITARY INTERESTS:

CUSTODIANS:
Army - AV
Air Force - 99

REVIEW ACTIVITIES:
Army - CR, MI
Air Force - 82

PREPARING ACTIVITY:
DLA - IS
(PROJECT: 5305-2072)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.