INCH-POUND

A-A-55623
18 March 1997
SUPERSEDING
MS18211B
7 JANUARY 1995

COMMERCIAL ITEM DESCRIPTION

SCREW, MACHINE, 82° AND 100° , FLAT COUNTERSUNK HEAD, SLOTTED, PLASTIC (NYLON), UNC-2A AND UNF-2A

The General Services Administration has authorized the use of this Commercial Item Description for all Federal Agencies.

1. Scope. This Commercial Item Description (CID) depicts the requirements for UNC-2A and UNF-2A thread, plastic - nylon, slotted, 82° and 100°, flat countersunk head, machine screws.

2. Salient characteristics.

2.1 Material shall be plastic - nylon in accordance with ASTM D4066, Group 01, Class 1, Grade 1.

2.2 Threads shall be in accordance with ASME B1.1. Acceptable screw threads are those which can be threaded by hand with a nut to at least two fully formed threads closest to the screw's head. The nut shall be ferrous, hexagon type, UNC-2B or UNF-2B as applicable, conforming dimensionally to ASME B18.6.3.

2.3 Full form threads shall extend to within two threads of the bearing surface of the head or closer if practicable.

2.4 All tolerances, unless otherwise specified, shall be ±.005 for 3 place decimals.

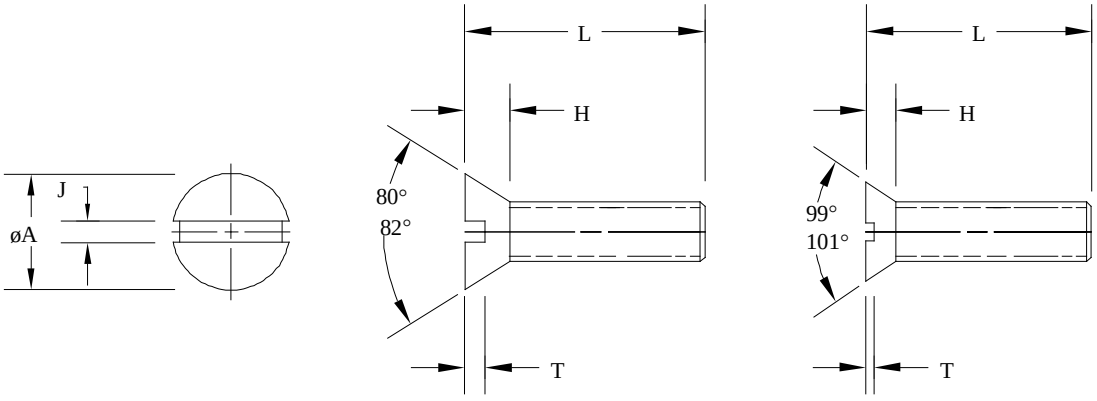

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and data which may improve this document should be sent to: Defense Industrial Supply Center. ATTN: DISC-EED, 700 Robbins Avenue, Philadelphia, PA 19111-5096.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

TABLE I. DASH NUMBERS AND DIMENSIONS.

NOMINAL SIZE		.086(NO 2)		.112(NO 4)		.138(NO 6)		.164(NO 8)		.190(NO 10)		.190(NO 10)		.250(1/4)		.250(1/4)	
THREAD CLASS		56 UNC-2A		40 UNC-2A		32 UNC-2A		32 UNC-2A		24 UNC-2A		32 UNF-2A		20 UNC-2A		28 UNF-2A	
∅A HEAD	MAX	.172		.225		.279		.332		.385		.385		.507		.507	
H HEAD HEIGHT	82°	.055		.070		.085		.100		.120		.120		.155		.155	
	100°	.037		.049		.060		.072		.083		.085		.110		.110	
J SLOT WIDTH		.028		.035		.045		.050		.055		.055		.070		.070	
T SLOT DEPTH		.020		.025		.030		.035		.045		.045		.070		.070	
L		DASH NUMBERS															
LENGTH	TOL	82°	100°	82°	100°	82°	100°	82°	100°	82°	100°	82°	100°	82°	100°	82°	100°
.125		1	20														
.188		2	21	41	61	81	101	121	141								
.250		3	22	42	62	82	102	122	142								
.312		4	23	43	63	83	103	123	143	163	183	203	223	243	263	283	303
.375		5	24	44	64	84	104	124	144	164	184	204	224	244	264	284	304
.438		6	25	45	65	85	105	125	145	165	185	205	225	245	265	285	305
.500		7	26	46	66	86	106	126	146	166	186	206	226	246	266	286	306
.625		8	27	47	67	87	107	127	147	167	187	207	227	247	267	287	307
.750	±.015			48	68	88	108	128	148	168	188	208	228	248	268	288	308
.875				49	69	89	109	129	149	169	189	209	229	249	269	289	309
1.000				50	70	90	110	130	150	170	190	210	230	250	270	290	310
1.125				51	71	91	111	131	151	171	191	211	231	251	271	291	311
1.250										172	192	212	232	252	272	292	312
1.375										173	193	213	233	253	273	293	313
1.500										174	194	214	234	254	274	294	314
1.750										175	195	215	235	255	275	295	315
2.000										176	196	216	236	256	276	296	316

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

3. Quality Conformance Provisions:

3.1 The suppliers shall be responsible for those in process controls and inspections necessary to supply a product consistently conforming to the requirements of this document.

3.2 Upon request, the supplier will certify with documented test/ inspection evidence, that the part supplied meets the requirements of this document.

4. Notes

4.1 All dimensions are in inches.

4.2 Interpret drawing in accordance with ASME Y14.5M.

4.3 The gate vestige shall be limited to .025 max and shall not be included in any tolerance.

4.4 The Part Identification Number PIN shall consist of the basic CID number followed by a dash number from Table I.

Example: AA 55623 - 42

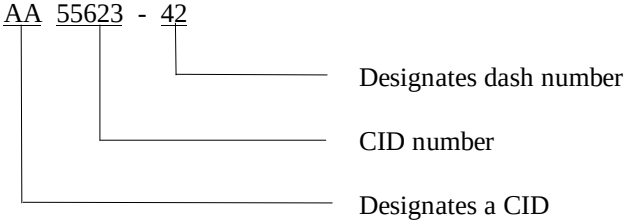

AA55623-42 = indicates plastic-nylon, slotted, 82°, flat countersunk head, machine screw, .112 inch nominal diameter, .250 inch long.

4.5 Preservation, packaging, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

TABLE II SUPERSESSION TABLE

MILITARY PIN MS18211	REPLACEMENT CID PIN AA55623	MILITARY PIN MS18211	REPLACEMENT CID PIN AA55623	MILITARY PIN MS18211	REPLACEMENT CID PIN AA55623
-1C	-1	-41C	-83	-81C	-150
-2C	-2	-42C	-84	-82C	-151
-3C	-3	-43C	-85	-83C	-163
-4C	-4	-44C	-86	-84C	-164
-5C	-5	-45C	-87	-85C	-165
-6C	-6	-46C	-88	-86C	-166
-7C	-7	-47C	-89	-87C	-167
-8C	-8	-48C	-90	-88C	-168
-9C	-20	-49C	-91	-89C	-169
-10C	-21	-50C	-101	-90C	-170
-11C	-22	-51C	-102	-91C	-171
-12C	-23	-52C	-103	-92C	-172
-13C	-24	-53C	-104	-93C	-173
-14C	-25	-54C	-105	-94C	-174
-15C	-26	-55C	-106	-95C	-175
-16C	-27	-56C	-107	-96C	-183
-17C	-41	-57C	-108	-97C	-184
-18C	-42	-58C	-109	-98C	-185
-19C	-43	-59C	-110	-99C	-186
-20C	-44	-60C	-111	-100C	-187
-21C	-45	-61C	-121	-101C	-188
-22C	-46	-62C	-122	-102C	-189
-23C	-47	-63C	-123	-103C	-190
-24C	-48	-64C	-124	-104C	-191
-25C	-49	-65C	-125	-105C	-192
-26C	-50	-66C	-126	-106C	-193
-27C	-51	-67C	-127	-107C	-194
-28C	-61	-68C	-128	-108C	-195
-29C	-62	-69C	-129	-83F	-203
-30C	-63	-70C	-130	-84F	-204
-31C	-64	-71C	-131	-85F	-205
-32C	-65	-72C	-141	-86F	-206
-33C	-66	-73C	-142	-87F	-207
-34C	-67	-74C	-143	-88F	-208
-35C	-68	-75C	-144	-89F	-209
-36C	-69	-76C	-145	-90F	-210
-37C	-70	-77C	-146	-91F	-211
-38C	-71	-78C	-147	-92F	-212
-39C	-81	-79C	-148	-93F	-213
-40C	-82	-80C	-149	-94F	-214

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

TABLE II SUPERSESSION TABLE (CONT'D)

MILITARY PIN MS18211	REPLACEMENT CID PIN AA55623	MILITARY PIN MS18211	REPLACEMENT CID PIN AA55623
-95F	-215	-128C	-269
-96F	-223	-129C	-270
-97F	-224	-130C	-271
-98F	-225	-131C	-272
-99F	-226	-132C	-273
-100F	-227	-133C	-274
-101F	-228	-134C	-275
-102F	-229	-109F	-283
-103F	-230	-110F	-284
-104F	-231	-111F	-285
-105F	-232	-112F	-286
-106F	-233	-113F	-287
-107F	-234	-114F	-288
-108F	-235	-115F	-289
-109C	-243	-116F	-290
-110C	-244	-117F	-291
-111C	-245	-118F	-292
-112C	-246	-119F	-293
-113C	-247	-120F	-294
-114C	-248	-121F	-295
-115C	-249	-122F	-303
-116C	-250	-123F	-304
-117C	-251	-124F	-305
-118C	-252	-125F	-306
-119C	-253	-126F	-307
-120C	-254	-127F	-308
-121C	-255	-128F	-309
-122C	-263	-129F	-310
-123C	-264	-130F	-311
-124C	-265	-131F	-312
-125C	-266	-132F	-313
-126C	-267	-133F	-314
-127C	-268	-134F	-315

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

Military Interests

Preparing Activity
DLA-IS

Custodians:
Army - AR
Navy - SH
Air Force - 99

Project Number (5305-2189)

Review Activity:
Army - AT, AV, ME, MI
Navy - AS, MC, OS
Air Force- 82
National Security Agency - NSA

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.