INCH-POUND

A-A-55624
11 March 1997
SUPERSEDING
MS18212D
7 January 1994

COMMERCIAL ITEM DESCRIPTION

# SCREW, MACHINE, PAN HEAD, SLOTTED, PLASTIC (NYLON), UNC-2A

The General Services Administration has authorized the use of this Commercial Item Description for all Federal Agencies.

1. Scope. This Commercial Item Description (CID) depicts the requirements for UNC-2A thread, plastic-nylon, slotted, pan head machine screws.

2. Salient characteristics.

2.1 Material shall be plastic-nylon in accordance with ASTM D4066, Group 01, Class 1, Grade 1.

2.2 Threads shall be in accordance with ASME B1.1. Acceptable screw threads are those which can be threaded by hand with a nut to at least two fully formed threads closest to the screw's head. The nut shall be fully ferrous, hexagon type, UNC-2B, conforming dimensionally to ASME B18.6.3.

2.3 Screws up to and including 2.000 inches in length shall have full form threads extending to within two threads of the bearing surface of the head or closer if practicable. Screws over 2.000 inches in length shall have a minimum full form thread length of 1.750 inch.

2.4 All tolerances, unless otherwise specified, shall be ±.005 for 3 place decimals.

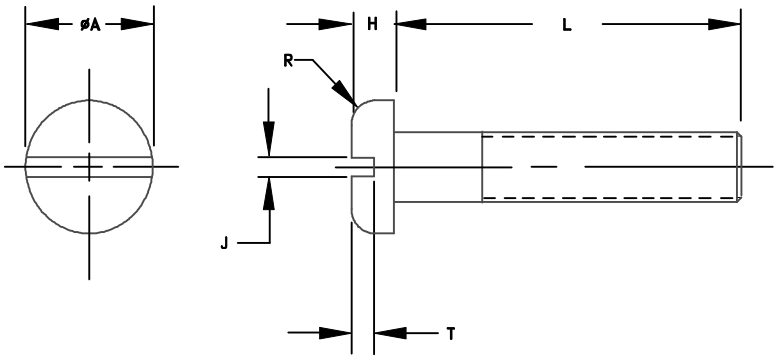


BENEFICIAL COMMENTS, (RECOMMENDATIONS, ADDITIONS, DELETIONS, CLARIFICATIONS, ETC., AND DATA WHICH MAY IMPROVE THIS DOCUMENT SHOULD BE SENT TO: DEFENSE INDUSTRIAL SUPPLY CENTER, ATTN: DISC-ECC, 700 ROBBINS AVENUE, PHILADELPHIA, PA. 19111-5096.



DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

| NOMINAL SIZE | | .086 (NO.2) | .112 (NO.4) | .138 (NO.6) | .164 (NO.8) | .190 (N0.10) | .250 (1/4) | .375 (3/8) |
|---|---|---|---|---|---|---|---|---|
| THREAD CLASS | | 56 UNC-2A | 40 UNC-2A | 32 UNC-2A | 32 UNC-2A | 24 UNC-2A | 20 UNC-2A | 16 UNC-2A |
| ∅A HEAD | | .160 | .210 | .265 | .320 | .365 | .475 | .740 |
| H HEAD HEIGHT | | .050 | .065 | .075 | .080 | .110 | .160 | .212 |
| J SLOT WIDTH | | .028 | .035 | .045 | .050 | .055 | .070 | .088 |
| T SLOT DEPTH | | .025 | .035 | .045 | .050 | .060 | .085 | .112 |
| R HEAD RADIUS MAX | | .035 | .042 | .046 | .052 | .061 | .087 | .143 |
| L LENGTH | TOL | DASH NUMBERS | | | | | | |
| .125 | | 1 | 21 | 41* | 61 | | | |
| .188 | | 2 | 22 | 42 | 62* | 82 | | |
| .250 | | 3 | 23 | 43 | 63 | 83 | | |
| .312 | | 4 | 24 | 44 | 64 | 84 | 104 | |
| .375 | | 5 | 25 | 45 | 65 | 85 | 105 | 125 |
| .438 | | 6 | 26 | 46 | 66 | 86* | 106* | |
| .500 | | 7 | 27 | 47 | 67 | 87 | 107 | 127 |
| .625 | | 8 | 28 | 48 | 68 | 88 | 108 | 128 |
| .750 | | 9 | 29 | 49 | 69 | 89 | 109 | 129 |
| | ±.015 | | | | | | | |
| .875 | | 10* | 30* | 50 | 70* | 90* | 110* | |
| 1.000 | | | 31 | 51 | 71 | 91 | 111 | 131 |
| 1.125 | | | 32 | 52 | 72 | 92 | 112 | 132 |
| 1.250 | | | 33 | 53 | 73 | 93 | 113 | 133 |
| 1.500 | | | 34 | 54 | 74 | 94 | 114 | 134 |
| 1.750 | | | | 55 | 75 | 95 | 115 | 135 |
| 2.000 | | | | 56 | 76 | 96 | 116 | 136 |
| 2.250 | | | | | 77 | 97 | 117 | |
| 2.500 | | | | | 78* | 98 | 118 | 138 |
| 2.750 | | | | | 79* | 99* | 119* | |
| 3.000 | | | | | 80* | 100* | 120 | 140 |

*- INACTIVE FOR NEW DESIGN



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

3. Quality Conformance Provisions.

3.1 The suppliers shall be responsible for those in process controls and inspections necessary to supply a product consistently conforming to the requirements of this document.

3.2 Upon request, the suppliers will certify with documented test/inspection evidence, that the part supplied meets the requirements of this document.

4. Notes:

4.1 All dimensions are in inches.

4.2 Interpret drawing in accordance with ASME Y14.5M.

4.3 The gate vestige shall be limited to .025 max and shall not be included in any tolerance.

4.4 The part identification number (pin) shall consist of the basic CID number followed by a dash number from Table I.

Example: AA 55624 - 87

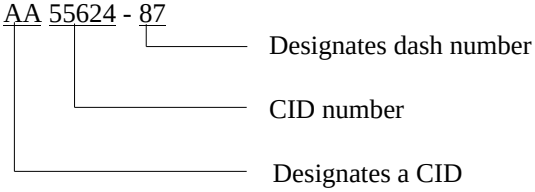


AA55624 - 87 = indicates UNC-2A thread, plastic -nylon, slotted, pan head machine screw, .190 inch nominal diameter, .500 inch long.

4.5 Preservation, packing, and marking shall be as specified in the contract or order.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

TABLE II. SUPERSESSION TABLE

| MILITARY PIN MS18212 | REPLACEMENT CID PIN AA55624 | MILITARY PIN MS18212 | REPLACEMENT CID PIN AA55624 | MILITARY PIN MS18212 | REPLACEMENT CID PIN AA55624 | MILITARY PIN MS18212 | REPLACEMENT CID PIN AA55624 |
|---|---|---|---|---|---|---|---|
| -1 | -1 | -26 | -43 | -51 | -74 | -77 | -105 |
| -2 | -2 | -27 | -44 | -52 | -75 | -78 | -106 |
| -3 | -3 | -28 | -45 | -53 | -76 | -79 | -107 |
| -4 | -4 | -29 | -46 | -54 | -77 | -80 | -108 |
| -5 | -5 | -30 | -47 | -55 | -78 | -81 | -109 |
| -6 | -6 | -31 | -48 | -56 | -79 | -82 | -110 |
| -7 | -7 | -32 | -49 | -57 | -80 | -83 | -111 |
| -8 | -8 | -33 | -50 | -58 | -82 | -84 | -113 |
| -9 | -9 | -34 | -51 | -59 | -83 | -85 | -114 |
| -10 | -10 | -35 | -53 | -60 | -84 | -86 | -115 |
| -11 | -21 | -36 | -54 | -61 | -85 | -87 | -116 |
| -12 | -22 | -37 | -55 | -62 | -86 | -88 | -117 |
| -13 | -23 | -38 | -56 | -63 | -87 | -89 | -118 |
| -14 | -24 | -39 | -61 | -64 | -88 | -90 | -119 |
| -15 | -25 | -40 | -62 | -65 | -89 | -91 | -120 |
| -16 | -26 | -41 | -63 | -66 | -90 | -92 | -125 |
| -17 | -27 | -42 | -64 | -67 | -91 | -93 | -127 |
| -18 | -28 | -43 | -65 | -68 | -93 | -94 | -128 |
| -19 | -29 | -44 | -66 | -69 | -94 | -95 | -129 |
| -20 | -30 | -45 | -67 | -70 | -95 | -96 | -131 |
| -21 | -31 | -46 | -68 | -71 | -96 | -97 | -133 |
| -22 | -33 | -47 | 69 | -72 | -97 | -98 | -134 |
| -23 | -34 | -48 | -70 | -73 | -98 | -99 | -135 |
| -24 | -41 | -49 | -71 | -74 | -99 | -100 | -136 |
| -25 | -42 | -50 | -73 | -75 | -100 | -101 | -137 |
| | | | | -76 | -104 | -102 | -138 |

Military Interests:

Custodians:
Army-AT,AV,MI
Navy-AS,MC,OS
Air Force-82

Reviewer:
Army-AR
Navy-SH
Air Force-99

Preparing Activity:
DLA-IS

(Project 5305-2187)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.