INCH-POUND

A-A-55628B
29 April 2024
SUPERSEDING
A-A-55628A
17 February 1998

COMMERCIAL ITEM DESCRIPTION

# NUT, PLAIN, CAP, HIGH CROWN
# UNC-2B AND UNF-2B

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

Beneficial comments, recommendations, additions, deletions, clarifications, and any other data that may improve this document should be sent to: DLA Aviation VEB, 6090 Strathmore Road, Richmond, VA 23237 or emailed to STDZNMGT@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 5310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

1. SCOPE. This Commercial Item Description (CID) depicts the requirements for Nut, Plain, Cap, High Crown, coarse or fine threads, Class 2.

2. SALIENT CHARACTERISTICS.

2.1. Material.

2.1.1. Steel, carbon, Types UNS (G10180) thru (G10400), (G11160) thru (G11370) or (G12120) thru (G12144).

2.1.2. Steel, corrosion resistant 300 series, Types UNS (3XXXX) series.

2.1.3. Copper alloys UNS (C23000) thru (C64600).

2.1.4. Aluminum alloys UNS (A92017), (A92117), (A96061), or (A96262).

2.1.5. Nylon in accordance with ASTM D4066, Group 1, Class 1 or 2 color natural white.

2.2. Protective finish.

2.2.1. Carbon steel cap nuts shall be cadmium plate in accordance with SAE AMS-QQ-P-416, Type II, Class 2.

Cadmium plate cap nuts should be used only on aerospace applications. No additional codes required for part number.

Zinc plate in accordance with ASTM B633 FE/ZN 5 Type II. Add letter “Z” to end of part number for zinc plate carbon steel cap nut.

Nickel plate in accordance with SAE AMS-QQ-N-290 Class 2. Add letter “N” to end of part number for nickel plate carbon steel cap nut.

2.2.2. Steel, corrosion resistant cap nuts shall be cleaned, descaled and passivated in accordance with ASTM A967/A967M. No additional codes required for part number.


2.2.3. Copper alloy cap nuts shall be black oxide coated in accordance with MIL-DTL-495. No additional codes required for part number.

Nickel plate in accordance with SAE AMS-QQ-N-290 Class 2. Add letter “N” to end of part number for nickel plate copper alloy cap nut.

Plain bright cap nut with no additional surface finish. Add letter "P" to end of part number.

2.2.4. Aluminum alloy cap nut shall be anodized in accordance with MIL-PRF-8625 Class 1. No additional codes required for part number.

2.3. Threads shall be right hand UNC or UNF Class 2B in accordance with ASME B1.1. Thread acceptability shall be in accordance with ASME B1.3M system 21.

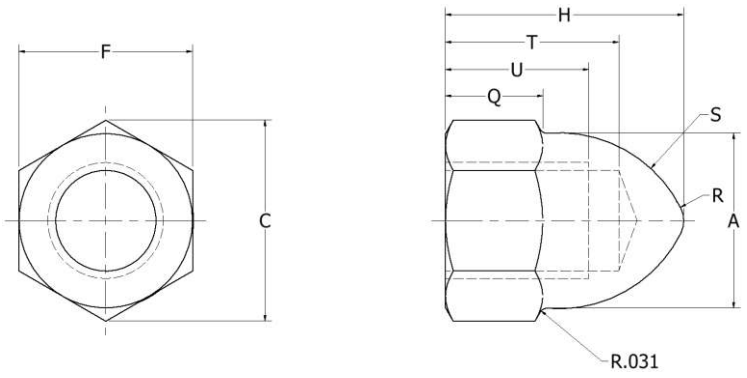




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

Table I. Dash numbers

| Dash numbers | | | | | Size | Thread -2B |
|---|---|---|---|---|---|---|
| Carbon Steel | CRES | Brass | Nylon | Aluminum | | |
| 1 | 21 | 411 | 511 | 611 | .138 | 32UNC |
| 61 | 81 | 201 | 301 | 811 | | 40UNF |
| 2 | 22 | 412 | 512 | 612 | .164 | 32UNC |
| 62 | 82 | 202 | 302 | 812 | | 36UNF |
| 3 | 23 | 413 | 513 | 613 | .190 | 24UNC |
| 63 | 83 | 203 | 303 | 813 | | 32UNF |
| 5 | 25 | 415 | 515 | 615 | .250 | 20UNC |
| 65 | 85 | 205 | 305 | 815 | | 28UNF |
| 6 | 26 | 416 | 516 | 616 | .3125 | 18UNC |
| 66 | 86 | 206 | 306 | 816 | | 24UNF |
| 7 | 27 | 417 | 517 | 617 | .375 | 16UNC |
| 67 | 87 | 207 | 307 | 817 | | 24UNF |
| 8 | 28 | 418 | 518 | 618 | .4375 | 14UNC |
| 68 | 88 | 208 | 308 | 818 | | 20UNF |
| 9 | 29 | 419 | 519 | 619 | .500 | 13UNC |
| 69 | 89 | 209 | 309 | 819 | | 20UNF |
| 10 | 30 | 420 | 520 | 620 | .5625 | 12UNC |
| 70 | 90 | 210 | 320 | 820 | | 10UNF |
| 11 | 31 | 421 | 521 | 621 | .625 | 11UNC |
| 71 | 91 | 211 | 311 | 821 | | 18UNF |
| 12 | 32 | 422 | 522 | 622 | .750 | 10UNC |
| 72 | 92 | 212 | 312 | 822 | | 16UNF |
| 13 | 33 | 423 | 523 | 623 | .875 | 9UNC |
| 73 | 93 | 213 | 323 | 823 | | 14UNF |
| 14 | 34 | 424 | 524 | 624 | 1.000 | 8UNC |
| 74 | 94 | 214 | 314 | 824 | | 12UNF |
| 15 | 35 | 425 | 525 | 625 | 1.125 | 7UNC |
| 75 | 95 | 215 | 325 | 825 | | 12UNF |
| 16 | 36 | 426 | 526 | 626 | 1.250 | 7UNC |
| 76 | 96 | 216 | 316 | 826 | | 12UNF |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

3. REGULATORY REQUIERMENTS. The offeror/contractor is encouraged to use recovered, recycled, biobased, and environmentally-preferable materials to the maximum extent practicable.

4. PRODUCT CONFORMANCE PROVISIONS.

4.1. Product Conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

4.2. The suppliers shall be responsible for those in process controls and inspections necessary to supply a product consistently conforming to the requirements of this document.

4.3. Upon request, the suppliers will certify with documented test/inspection evidence, the part supplied meets the requirements of this document.

5. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES.

6.1. All dimensions are in inches, unless otherwise specified. All dimensions and tolerances shall be in accordance with SAEJ483.


6.2. Interpret drawing in accordance with ASME YI4.5.

6.3. Preservation, packing, and marking shall be as specified in the contract or order.

6.4. Cap nuts manufactured prior to date of this Commercial Item Description (CID) are acceptable for use until exhausted.

6.5. Part or Identification number (PIN). The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

The part identification number (PIN) shall consist of the basic CID number followed by a dash number from Table I, and a surface finish code when applicable.

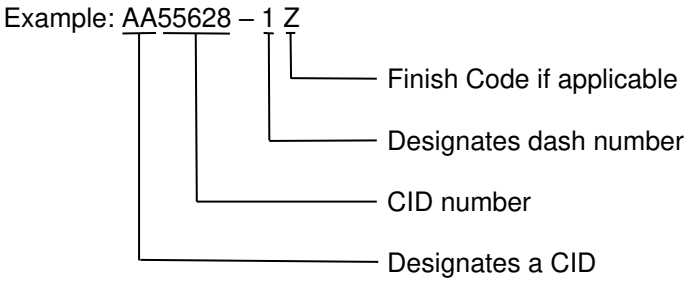


A-A-55628-1Z indicates Nut, plain, cap, high crown, .138-32 UNC-2B thread, carbon steel, Zinc plated.

Table II. Cross - Reference Table

| Cancelled MS PIN | Replaced CID PIN |
|---|---|
| MS24680 - * 1/ | AA55628 - * 1/ |

1/ * Represents the same designation codes for both MS and CID PINS.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

Concluding Material:

Custodians:
Army – AR
Navy – SH
Air Force – 99
DLA – GS

Review activities:
Army – AT, AV
Navy – AS, MC, OS

Preparing activity:
DLA – GS7

(Project 5310-2024-013)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.