INCH-POUND
A-A-55631
5 December 1997

COMMERCIAL ITEM DESCRIPTION

FILLERS, STRIP, FOR ROTARY SWEEPER BRUSH: FOR SWEEPER, FRONT MOUNTED OR TOWED TYPE

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for strip, tufted, steel and plastic fillers for high speed rotary sweepers. Fillers covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. The strip fillers shall be of the following types (see 7.2 and 7.4).

Type 001 - Tufted, wire filler
Type 002 - Tufted, plastic filler

3. SALIENT CHARACTERISTICS.

3.1 Environmental conditions. The fillers shall satisfactorily withstand storage temperatures ranging from -60°F to +160°F and operating temperatures ranging from -40°F to +125°F.

3.2 Operating conditions. The fillers shall be for use on sweepers that operate at 0-800 rpm broom core rotational speed.

3.3 Performance. When operated on concrete runways at a sweeping speed of 35 mph, a rotational speed of 500 rpm and with a brush pattern of not less than 2 inches but not greater than 4 inches, a new filler shall be capable of operating satisfactorily for a minimum of 160 hours. A lack of water/snow, as well as runway surfaces that have been milled for run off grooves may reduce filler operating time to 128 hours. For wire fillers the loss of wire 2 inches or longer throughout the life of the filler shall not exceed 2 percent of the overall initial weight of the filler. The fillers shall maintain this performance at any operational temperature in the range specified in 3.1.

3.4 Construction. Each filler shall consist of a strip formed from .035 to .049 inch thick UNS G10700 steel into a channel 27.563 ± .063 inches long by 1.625 ± .063 inch wide by .125 inch minimum thickness. The steel shall be in accordance with SAE J403. Each strip shall be filled with tufted zinc coated wire or polypropylene (poly) bristles and shall be of the type as specified in section 2.

3.4.1 Bristles.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Industrial Supply Center, Attn.: DISC-BBEE, 700 Robbins Avenue, Philadelphia, PA 19111-5096.

AMSC N/A FSC 3825

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

3.4.1.1 Wire Bristles. The wire bristles shall be made of steel conforming to SAE J403 (UNS G10700) with a regular zinc coating. The bristles shall be .018 inch diameter minimum. The bristles shall be crimped with not less than 3 crimps per inch at a crimp amplitude of .063 inch minimum. The regular zinc coating shall be applied at not less than .01 ounce per square foot and the tensile strength of the wire shall be in the range of 310,000 - 355,000 pounds per square inch (psi) after crimping.

3.4.1.2 Plastic Bristles. Plastic bristles shall be formed of virgin polypropylene strands and have an oval cross section not less than .070 x .105 inch. The strands shall be crimped and the tensile strength shall be 35,000 psi minimum after crimping.

3.4.2 Filler Types.

3.4.2.1 Type 001 - Tufted, wire. The filler shall be a strip filled with wire bristles as specified in 3.4.1.1. The wire shall be formed into tufts with an 11.50 inches minimum bristle length. Each tuft shall consist of not less than 240 sweeping ends. There shall be not less than 17 tufts per strip. All tufts shall be mounted with a cup and/or damper ring extending a minimum of 3.50 inches up the length of the tuft for support. All bristles and tufts shall be secured to the strip so as not to allow for loss of bristles during use and storage.

3.4.2.2 Type 002 - Tufted, plastic. The filler shall be a strip filled with plastic strands as specified in 3.4.1.2. The strands shall be crimped and formed into tufts with not less than 14 strands per tuft and with an 11.50 inches minimum bristle length. There shall be not less than 17 tufts per strip. All tufts shall be mounted with a cup and/or damper ring extending a minimum of 3.50 inches up the length of the tuft for support. All bristles and tufts shall be secured to the strip so as not to allow for loss of bristles during use and storage.

4. REGULATORY REQUIREMENTS.

4.1 Recovered material. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards and quality assurance practices and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Bid sample criteria. When specified in the contract or purchase order, a bid sample shall be inspected to determine compliance with the requirements specified in section 3.

5.3 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID.

5.3.1 The company producing the item must have been producing a product meeting the requirements of this CID for at least 18 months.

5.3.2 The company must have sold 2,500 units meeting the requirements of this CID in the commercial marketplace over the past 12 months.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:56Z
Check the source to verify that this is the current version before use.

6. PACKAGING. Preservation, packing and marking shall be as specified in the contract or purchase order.

7. NOTES.

7.1 Addresses for obtaining copies of referenced documents.

7.1.1 Non-Government publications. SAE J403 "Chemical Compositions of SAE Carbon Steels" is available from the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096-0001.

7.2 Ordering data. The contract or order should specify the following:

a. CID document number and revision.


b. CID PIN.

c. Quality assurance provisions.

d. Packaging requirements.

7.3 Government Procurements. Offerors of these fillers shall identify the actual manufacturer's part number reference. This reference will be used for identification of the product offered. It is the responsibility of the offeror to ensure the product offered conforms to the requirements of this CID.

7.4 Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor:

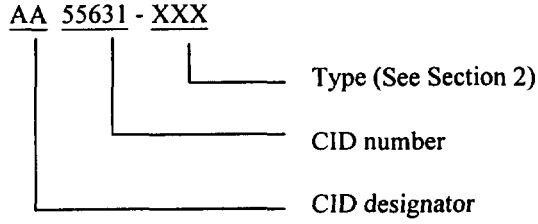

MILITARY INTERESTS:

Custodians:
Air Force - 99
Army - AT

Review Activity:
Air Force - 84

CIVIL AGENCY COORDINATING ACTIVITY

GSA - FSS

Preparing Activity:
DLA – IS

Project 3825-0242

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.