INCH-POUND
A-A-55632
5 December 1997

COMMERCIAL ITEM DESCRIPTION

SPACERS, FOR ROTARY SWEEPER BRUSH: FOR SWEEPER, FRONT MOUNTED OR TOWED TYPE

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for spacers, steel and plastic for high speed rotary sweepers. Spacers covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. The spacers shall be of the following types and classes (see 7.2 and 7.4):

Type 04 - Flat ring, continuous, steel spacer
Type 05 - Flat ring, continuous, plastic spacer
Type 09 - Flat ring, tufted, steel spacer
Type 10 - Flat ring, tufted, plastic spacer

Class A - 10.75 inch Inside Diameter
Class B - 19.50 inch Inside Diameter

3. SALIENT CHARACTERISTICS.

3.1 Environmental conditions. The spacers shall satisfactorily withstand storage temperatures ranging from -60°F to +160°F and operating temperatures ranging from -40°F to +125°F.

3.2 Operating conditions. The spacers shall be for use on sweepers that operate at 0-800 rpm broom core rotational speed.

3.3 Performance. When operated on concrete runways at a sweeping speed of 35 mph, a rotational speed of 500 rpm and with a brush pattern of not less than 2 inches but not greater than 4 inches, a new spacer shall be capable of operating satisfactorily for a minimum of 160 hours. The spacers shall maintain this performance at any operational temperature in the range specified in 3.1.

3.4 Construction. Spacers shall have an inside diameter of 10.75 -0 + .125 inches for Class A and 19.50 -0 + .125 inches for Class B and shall be of the type and class as specified in section 2.

3.4.1 Steel spacers. The spacers shall be manufacturer's standard type and shall be made from steel conforming to SAE J403 (UNS G10180) with a minimum thickness of .025 inches for Class A and .045 inches for Class B.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Industrial Supply Center, Attn.: DISC-BBEE, 700 Robbins Avenue, Philadelphia, PA 19111-5096.

AMSC N/A FSC 3825

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

3.4.2 Plastic spacers. The spacers shall be manufacturer's standard type and shall be made of polypropylene plastic.

3.4.3 Spacer Thickness.

3.4.3.1 Type 04 and 05 - Flat ring, continuous. The spacers shall have a thickness of 1.375 ± .063 inch.

3.4.3.2 Type 09 and 10 - Flat ring, tufted. The spacers shall have a thickness of .625 ± .125 inch.

4. REGULATORY REQUIREMENTS.

4.1 Recovered material. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards and quality assurance practices and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Bid sample criteria. When specified in the contract or purchase order, a bid sample shall be inspected to determine compliance with the requirements specified in section 3.

5.3 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID.

5.3.1 The company producing the item must have been producing a product meeting the requirements of this CID for at least 18 months.

5.3.2 The company must have sold 2,500 units meeting the requirements of this CID in the commercial marketplace over the past 12 months.

6. PACKAGING. Preservation, packing and marking shall be as specified in the contract or purchase order.

7. NOTES.

7.1 Addresses for obtaining copies of referenced documents.

7.1.1 Non-Government publications. SAE J403 "Chemical Compositions of SAE Carbon Steels" is available from the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096-0001

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:56Z
Check the source to verify that this is the currentversion before use.

7.2 Ordering data. The contract or order should specify the following:

a. CID document number and revision.


b. CID PIN.

c. Quality assurance provisions.

d. Packaging requirements.

7.3 Government Procurements. Offerors of these spacers shall identify the actual manufacturer's part number reference. This reference will be used for identification of the product offered. It is the responsibility of the offeror to ensure the product offered conforms to the requirements of this CID.

7.4 Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor:

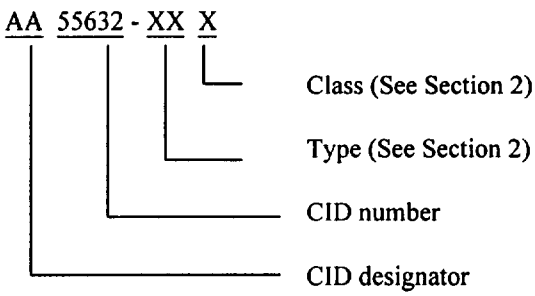

7.5 Type 04 and 05 spacers are to be used with A-A-55630 sweeper brush fillers and Type 09 and 10 spacers are to be used with A-A-55527 sweeper brush fillers.

MILITARY INTERESTS:

Custodians:
Air Force - 99
Army -AT

Review Activity:
Air Force - 84

CIVIL AGENCY COORDINATING ACTIVITY

GSA - FSS

Preparing Activity:
DLA - IS

Project 3825-0243

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.