[METRIC]
A-A-2095D
November 3, 1993
SUPERSEDING
A-A-2095C
December 10, 1993

COMMERCIAL ITEM DESCRIPTION

DESK (STEEL, CONTEMPORARY STYLE)

The General Services Administration has authorized the use of this Commercial Item Description in preference to Interim Federal Specification AA-D-001918.

Salient characteristics. These characteristics concisely describe the essential physical and functional/performance features of the commercially available item

Design The desk shall be contemporary style intended for heavy duty, office use. The Type I, Size 1 and 4 desks shall be designed to be used, with a desk attachment L-return, for creating clerical or secretarial work stations

Types, classes, styles and sizes

Type I - Desk, single-pedestal with center drawer and lock.
Style A - Right-hand pedestal, no overhang
Size 1 - 1500 mm W x 750 mm D x 750 mm H.
Size 2 - 1150 mm W x 750 mm D x 750 mm H.
One storage drawer and one file drawer.
Style B - Left-hand pedestal, no overhang
Size 1 - 1500 mm W x 750 mm D x 750 mm H.
Size 2 - 1150 mm W x 750 mm D x 750 mm H.
One storage drawer and one file drawer
Style E - Interview style, right-hand pedestal with rear overhang.
Size 4 - 1500 mm W x 900 mm D x 750 mm H with a 150 mm overhang at the back.
One storage drawer and one file drawer

Type II - Desk, double-pedestal with center drawer and lock
Style C - Non-conference style; no overhang
Size 1 - 1500 mm W x 750 mm D x 750 mm H
One storage drawer and one file drawer in right pedestal, three storage drawers in left pedestal.
Style D - Conference style with overhang.
Size 3 - 1825 mm W x 900 mm D x 750 mm H, with 150 mm

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

overhangs at the back and on two sides.
One storage drawer and one file drawer in right pedestal, three storage drawers in left pedestal.
Type III - Table desk, no pedestals with center drawer and lock Recessed knee space at rear
Style C - Non-conference style, no overhang
Size 3 - 1800 mm W x 900 mm D x 750 mm H

NOTES - 1. Height shall be measured with glides fully retracted into legs.
2. Unless otherwise specified, dimensions shall have a tolerance of ±25 mm.
3 For style C and E desks the plus tolerance on the width dimension shall be 58 mm

General construction.

Laminated top The desk shall have a particleboard top with a self-edged, high pressure laminated plastic face and a backing sheet to produce a balanced sandwich construction. Alternatively, the top may be steel with a self-edged, high pressure laminated plastic face. The simulated walnut grain of the laminated plastic tops shall match GSA Standard Sample No FSS-L-01002 Alternatively, the manufacturer may provide his equivalent, commercial, walnut grain laminated plastic, subject to contracting officer approval Overall thickness of the top shall be 25 mm, minimum

Legs. Four, 25 mm square (minimum), full height legs shall be reinforced as necessary to withstand all applicable tests All exterior surfaces of legs shall be polished finish, stainless steel or polished, chrome plated steel The legs shall be equipped with adjustable leveling glides.

Pedestal The overall size of the drawer pedestal shall be of such dimensions as to properly contain the kind, size and location of the drawers specified The pedestal walls shall be not less than 0 70 mm steel with corners constructed to eliminate rough metal edges There shall be an end filler panel placed between the desk legs to create a flush profile All storage drawer fronts and file drawer fronts shall extend from the leg to the kneespace side of the pedestal, with the kneespace side of the drawer front overlapping the side of the pedestal and positioned in the same plane as the kneespace side of the pedestal. (Necessary clearance shall be allowed between legs and drawer fronts.)

Drawers. The drawers shall have stops to prevent accidental

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

removal, but allow removal without the use of tools. The minimum inside clear dimensions shall be as specified in Table I. File and storage drawers shall be welded construction with double wall drawer fronts The storage drawer body shall be constructed to accommodate partitions Each storage drawer shall have a minimum of two (2) partitions The storage drawers shall be suspended on telescoping ball bearing slides, rollers, or nylon glides The slides, glides, or rollers shall promote smooth, quiet operation and prevent metal to metal contact between suspension members The file drawers shall be on full progressive suspensions or telescoping ball bearing slides. The file drawer shall have a spring activated follower block which operates smoothly. Bumpers shall cushion drawer stops in both closed and extended positions. The center drawer shall contain a convenience tray and a locking mechanism controlling all drawers Alternatively, the manufacturer may provide his commercial drawer locking subject to Contracting Officer approval.

TABLE I Drawer dimensions

Drawer type	Minimum inside clear dimension		
	Width	Height	Depth
Storage Drawer	300 mm	110 mm	560 mm
File Drawer	300 mm	250 mm	600 mm
Center Drawer	380 mm	40 mm	350 mm

Locks. The locks shall be of the disk or pin tumbler type, having not less than four disks or pin tumblers, and shall be operated by a grooved key. The locks shall have not less than 125 key changes. No one key shall open more than one lock on one unit, up to a minimum of 125 units, consecutively produced Duplicate keys shall be furnished for each lock

Pulls (drawers) The drawer pulls shall be recessed The finish shall be polished chrome plate on steel or die cast zinc, or polished anodized aluminum

Attachment bracket Each Type I, Size 1 and Size 4 desk shall be furnished with a bracket complying with Figure 1. Type I, Size 1 and 4 desks shall be capable of intermembering with desk attachments covered by Commercial Item Description A-A-2093, using the specified attachment bracket.

Finish. The finish shall be semi-gloss baked enamel. Colors

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

shall match Federal Standard No. 595, black (27040) and parchment within the range delimited by (26586) and (26405). Alternatively, the manufacturer may provide his commercial black or parchment baked enamel finish, subject to contracting officer approval

Identification label The label shall have the contractor's name or trademark, contract number, National Stock Number (if specified), and month, and year of manufacture legibly marked in dark ink. The label shall be located on the inside of the knee space near the top and back of the pedestal or panel end. The label shall not be removable by hand without defacement after being affixed for four hours.

Workmanship. The workmanship shall be of the quality to produce finished desks acceptable in appearance, function and serviceability and prevent potential hazard to personnel or their clothing The joining of all the components of the commodities covered by this CID shall result in compact units of sufficient strength to prevent distortion, breakage or loosening of any component during handling, shipping, daily usage and when moved within the office.

Quality assurance provisions Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements specified herein Sampling for inspection shall be performed in accordance with MIL-STD-105, unless an equal or better plan is approved by the contracting officer or his/her representative. A lot shall consist of units of one type, style, size, and color The sample shall be one each. Inspection levels and AQL's shall be as follows.

For fit, finish and all other workmanship - Level II, AQL 6 5 defects per hundred units

For packaging, packing and marking - Level S-2, AQL 4 0 percent defective.

Any failure to meet the dimensions, color, identification label or performance requirements shall cause rejection of the lot.

Performance.

ANSI/BIFMA Each desk shall comply with the requirements of BIFMA Desk Products Standard X5.5-1989, with the following exceptions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

Exceptions to BIFMA American National Standard X5.5-1989. Section 13.2.2, 13.2.3, 14, 15, 16, 17, 18, and 19 are not applicable.

Level test for top. The test unit shall be located on a flat surface. Place a steel straight-edge on edge, diagonally (corner to corner) across the top. The length of the straight-edge shall be greater than the diagonal length of the top There shall be no gap between the straight-edge and top greater than 3 mm at any point along the diagonal length of the top. This test shall be performed along both diagonals of the top before and after performing the top loading test specified in BIFMA.

Chromium plating test. Plated samples shall be tested for corrosion in accordance with the 5 percent neutral salt spray at 35°C in accordance with ASTM Test Method B-117. Test period shall be not less than 48 hours. After the specified exposure is completed, the specimen shall be visually examined to assure that the plating shows no evidence of peel, chip, uneven color, powder film, pits, or stain Widely scattered spots of corrosion are permitted, however, none of these spots shall exceed 1 6 mm along the greatest dimension

Regulatory Requirement. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Standards The issues of ANSI/BIFMA X5.5, MIL-STD-105, and Fed Std 595 in effect on the date of the solicitation shall be used to determine compliance with the stated requirements.

Notes

Purchaser should specify type, style, size and color

Plastic laminate panel A sample of the decorative plastic laminate sheet is available from the General Services Administration, Federal Supply Service, National Furniture Center, Engineering Division, Washington, DC 20406.

Color panel. A sample of the baked enamel finish referenced in

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

Fed. Std. No. 595 is available from the General Services Administration, Business Center, Federal Supply Service, Washington, DC 20407 or the Business Service Center in the nearest General Services Administration Regional Offices.

Federal Standard No. 595 is available from the General Services Administration Business Service Centers in Boston, MA, New York, NY, Philadelphia, PA, Washington, DC, Atlanta, GA; Chicago, IL, Kansas City, MO; Fort Worth, TX, Houston, TX, Denver, CO; San Francisco, CA; Los Angeles, CA, and Seattle, WA.


ANSI/BIFMA standard Copies of the ANSI/BIFMA Standard X5 5 are available from the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.


MIL-STD-105. Copies of MIL-STD-105 are available from the Standardization Document Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

This drawing describes one leg of an L-shaped bracket intended for use in joining a 1500 mm single pedestal desk with a secretarial or clerical L-unit

The other leg, where the bracket is fastened to the desk or L-unit should be the manufacturers own design

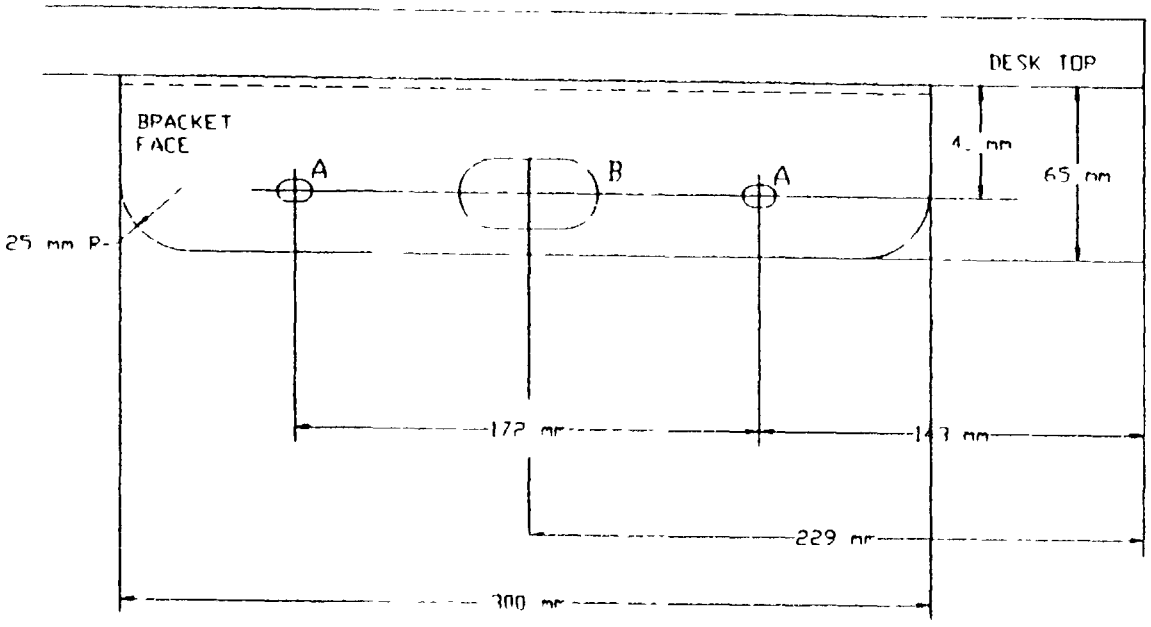



DESK ATTACHMENT BRACKET
MATERIAL - 13 mm STEEL

NOTES
A - 8mm x 13mm slot
B - 25mm x 50mm slot

A-A-20551

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.