[INCH-POUND]
A-A-3029
November 6, 1996

COMMERCIAL ITEM DESCRIPTION

CUTTER, WIRE ROPE, HAND-OPERATED, HYDRAULIC, HORIZONTAL CUTTING

The General Services Administration has authorized the use of this Commercial Item Description for the procurement of the type I, class 1 cutters specified in GGG-C-800B for all federal agencies.

1. SCOPE.

1.1 Scope. This Commercial Item Description covers a hand-operated hydraulic wire-rope cutter used primarily in cutting plow steel wire rope such as that used for heavy hoisting on cranes, derricks, anchor cables, towing hawsers, mooring lines, and general purpose rigging. The cutter shall be similar to Figure 1.

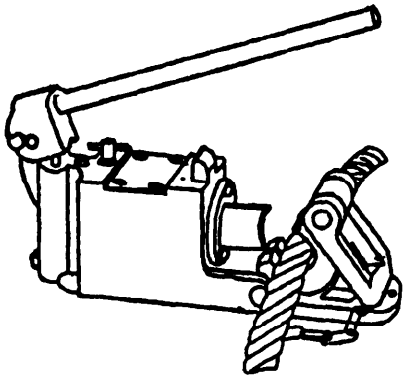


Figure 1. Cutter, wire rope, hand-operated, hydraulic, horizontal cutting.

2. CLASSIFICATION.

2.1 Classification. Not applicable.

3. SALIENT CHARACTERISTICS.

3.1 Design. The cutter shall consist of a hand-operated hydraulic pump, main body, cutting blade, blade guides, and rope holder. The cutter shall be convenient, safe, and shall be operable by one person. No part of the cutter shall become detached accidentally during normal usage. Parts shall be castings, forgings, molded, or welded with no plugging or peening used for reclaiming castings or forgings. Surfaces not plated or of corrosion-resistant material shall be primed and painted with a good grade of enamel. All parts having the same manufacturer's part number shall be completely interchangeable without requiring modification. The unit shall operate efficiently in either the horizontal or vertical position. The capacity, weight, and dimensions for various rope size cutters is as specified in Table I.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center, Kansas City, MO 64131.

Distribution Statement A. Approved for public release; distribution is unlimited.

FSC 5110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

TABLE I. Cutter, wire rope, hand-operated, hydraulic, horizontal cutting

| Size number | Capacity range of wire rope diameter (Inches) | Weight (maximum) (Pounds) | Overall dimensions | | |
|---|---|---|---|---|---|
| | | | Length (maximum) (Inches) | Height (maximum) (Inches) | Width (maximum) (Inches) |
| 1 | 0 - 3/4 | 22 | 13-1/2 | 6 | 4-1/4 |
| 2 | 0 - 1-1/8 | 34 | 15 | 7 | 4-1/2 |
| 3 | 0 - 1-3/4 | 62 | 19 | 8 | 5-1/4 |

3.1.1 Hydraulic unit. The hydraulic unit shall be capable of operation by continuous hand pumping and shall develop sufficient pressure to easily force the cutting blade through the maximum size wire rope for which the cutter is rated. A release valve shall provide a positive return of the blade to its original position. There shall be no leaks of any hydraulic oil when operated in any normal working position under maximum working pressure or when idle. A means shall be provided to prevent damage if pumping is continued after severing the wire rope. The unit shall be filled to the normal operating level with standard hydraulic oil used in cutters. The unit for each size cutter (see Table I) shall be capable of providing a minimum thrust of 12, 16, and 28 tons for sizes 1, 2, and 3, respectively.

3.1.2 Cutting blade. The cutting blade shall be of high grade tool steel properly hardened between 58 and 66 on the Rockwell C scale and shall be easily removable for resharpening or replacement. The design shall be such that blades will cut clean, leaving the rope end free of jagged wire and minimizing the deformation of the original roundness of the rope.

3.1.3 Rope holder. The rope holder shall be hinge-mounted and designed for simple, positive latching or other suitable means for easily inserting the wire rope to be cut. The holder shall have blade guides incorporated to assure a clean even cut.

3.1.4 Main body. The main body shall incorporate the hydraulic unit and cutting blade, and a means shall be provided for easily carrying the entire cutter in one hand. The underside of the body shall be suitably finished to prevent the tool from rocking under maximum load when operating on a flat surface.

3.2 Identification marking. The tool shall be marked with the manufacturer's name or identifying symbol and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.3 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Paints, coatings, platings, and finishes shall be smooth, adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g., sharp or rough external edges, corners, or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified requirements. For product characteristics and requirements which are not contractually specified, the provided product shall conform to the producer's own drawings, standards, specifications, and quality assurance practices for the highest quality product commercially offered by the producer. If the product is not commercially offered by the producer, the best commercial practices shall apply. The Government reserves the right to require proof of such conformances prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics by the Government. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

5.5 Hardness test. Each sample cutting blade shall be tested to determine conformance to the hardness requirement of 58 to 66 on the Rockwell C scale when tested in accordance with ASTM E18. Any sample failing to pass the hardness test shall cause the lot represented to be rejected.

5.6 Performance test. Each sample cutter shall cut, clean and without appreciable deformation, three pieces of plow steel wire rope of the maximum size specified for the applicable cutter. The time required to cut the maximum size wire rope during this test shall not exceed 50, 80, and 120 seconds for cutters having maximum-rated capacities of 3/4, 1-1/8, and 1-3/4 inches, respectively. One of the sample cutters shall be required to cut an additional 20 pieces of plow steel wire rope of the maximum size specified for the applicable cutter. Performance of the cutter shall show no excessive rounding, chipping, or the edge turning over on the cutting blade which will render the cutter unsatisfactory for further severing of wire rope. All components shall function properly and show no evidence of damage. Any sample cutter failing to pass the performance test shall be rejected and the lot it represents shall be rejected.

5.7 Proof test. One sample cutter from each lot shall be tested to determine compliance with the minimum thrust load requirements of either 12, 16, or 28 tons for sizes 1, 2, or 3, respectively (see Table I). Failure to meet this requirement shall be cause for rejection of the lot.

6. PACKAGING.

6.1 Packaging. Requirements of preservation, packing, packaging, and marking of packages shall be as specified in the contract or order.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

7. NOTES.

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents:

Federal Specifications and Standards: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC 20407.

Federal Acquisition Regulations (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20402-9371.

ANSI/ASQC Z1.4: American Society for Quality Control, P.O. Box 3005, 611 East Wisconsin Avenue, Milwaukee, WI 43201-4606.

ASTM E18: American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN(s).
(c) If bid samples are required, the number of samples required, and the subjective inspection requirements.
(d) If first article samples are required and the number of samples required.
(e) If lot sampling inspection is required and the applicable lot sampling requirements. For example:

Sampling for inspection. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Inspection. Each sample tool shall be examined and tested for all salient characteristics. The Inspection Level shall be S-2 with an Acceptable Quality Level of 4.0, expressed in terms of defects per hundred units.

(f) What preservation, packing, packaging, and marking of packages are required.

7.3 National Stock Numbers (NSNs). The following list of NSNs corresponds to the cutters specified in this CID. This list may not be indicative of all possible NSNs associated with this CID.

| NSN | SIZE |
|---|---|
| 5110-00-224-7058 | 1-1/8 inch capacity |

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions or notices to this Commercial Item Description until further notice.

PREPARING ACTIVITY:

GSA - FSS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.