|INCH-POUND|
A-A-50369
1 March 1989

COMMERCIAL ITEM DESCRIPTION

CAP, KNIT (WATCH)

1. SALIENT CHARACTERISTICS

1.1 Description. The watch cap shall be colored black, bell shaped, pull on style. The crown shall be shaped of four (4) equal sections joined together by darts of equal length. The cap shall be either a simulated two ply construction, or a single ply construction.

1.2 Material. The knitted yarn of the watch cap shall be made of fleece or pulled sheep's wool, or a combination of both, not lower in grade than 54's US Standard. The wool shall be free of reprocessed, reused, or waste wool. The thread for seaming and stitching the crown dart shall be cotton, colored black. The size and strength of the thread shall be sufficient to prevent breakage when the knit cap is laundered or worn.

1.3 Knit stitch type. When the simulated two ply construction is used, the stitch type for the body shall be half or full cardigan, with the crown a 1x1 rib. If a single ply construction is used, the body shall be half or full cardigan, with the crown and bottom a 1x1 rib, with the bottom having a non-ravelling edge.

1.4 Label. A commercial type label is acceptable provided additional printed cloth labels containing the information in 1.4.1 and 1.4.2 are provided.

1.4.1 Contract #, NSN, and size label. The cap shall have a label containing the contract number, NSN, and size, caught in the stitching of the crown.

1.4.2 Instruction label. The cap shall have an instruction label containing the information listed below. The label shall be caught in the stitching of the crown.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

ASMC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

Dry clean for best results.
OR
Hand launder in lukewarn water using a mild soap.
DO NOT WRING OR TWIST
Rinse in clean, cold water.
Reshape and dry flat.

1.5 Measurements. The cap shall conform to the measurements shown in Table I. All measurements are in inches.

Table I - Finished measurements

Measurement	Dimension	Tolerance
Simulated two ply process 1/		
Overall length (A)	11 to 12 1/2	-0-
Width across bottom edge (B)	8 1/2	± 1/4
Height of crown (C)	2 1/2	± 1/4
Single ply process 2/		
Height of crown (A)	2 1/2	± 1/4
Height of rack stitch (B)	5/8	± 1/8
Overall length (C)	11 to 12 1/2	-0-
Width across bottom edge (D)	8 1/2	± 1/4

1/ For the simulated two ply process, refer to Figure 1 for the following points of measurements:
- A. Measurements shall be taken from the top center point of crown to bottom open edge of watch cap.
- B. Measurement shall be taken across the bottom open edge of watch cap.
- C. Measurement shall be taken from the top center point of crown to bottom edge of crown (to rack stitching).

2/ For the single ply process, refer to Figure 2 for the following points of measurements:
- A. Measurement shall be taken from the top center point of crown to bottom edge of crown (to rack stitching).
- B. Measurement shall be taken from the bottom open edge of rack stitch to beginning of body stitching.
- C. Measurement shall be taken from the top center point of crown to bottom open edge of rack stitching, with the cap folded in half lengthwise so as to lie flat.
- D. Measurement shall be taken across the bottom open edge of cap.

1.6 Workmanship. After completion, the watch cap shall be thoroughly cleaned and all loose thread, lint and foreign matter removed. The cap shall be uniform in quality and shall be free from irregularities or defects which adversely affect performance, reliability or durability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

1.7 Approved styles. The following styles meet the requirements of this description:

Ben Berger, Co.	Style 2492
Marceau	Style M304
Schuessler Knitting Mills, Inc.	Style 197
Wigwam Mills, Inc.	Style 1016

Other manufacturers may submit their styles to the procuring activity for evaluation by the specification preparing activity, and ultimate inclusion in this document, if approved.

1.8 Product demonstration models. During the solicitation phase, interested firms (including the manufacturers of the above approved styles), shall provide the procuring agency with two product demonstration models of the item they propose to furnish for evaluation. The two samples provided by the successful offerer shall be tagged and sealed. One shall be retained by the procuring agency and the other furnished the assigned QAR for use as a reference in performing the examination in paragraph 2.2 and the scoring of defects in design, material, and workmanship not otherwise classified herein.

2. QUALITY ASSURANCE

2.1 Certification. When requested by the contracting officer, the contractor shall certify that the product offered meets the salient characteristics of this description and the product demonstration model. It shall conform to the producer's own drawings, specifications, standards and quality assurance practices when it is the same as the product offered for sale in the commercial marketplace.

2.2 Examination of the end item. Caps shall be inspected in accordance with MIL-STD-105. The defects found during the examination of the end item shall be classified as below. The applicable inspection levels and AQL's shall be as indicated in 2.3. The lot size shall be expressed in units of caps. Sample unit shall one cap.

Defects	Classification Major	Minor
I. MATERIAL DEFECTS AND WORKMANSHIP DAMAGE		
A. Open seam	X	
B. Any size hole, cut, tear, smash, run or dropped stitch	X	
C. Thin place or uneven knitting	X	
D. Missing yarn or broken yarn		X
E. Loose yarn		X
F. Visible mend		X
G. Needle chew		X
H. Any ravelling of rack stitching at bottom edge of cap	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
II. SHADE VARIATIONS		
A. Shade bar, dye streak, or area of no dye penetration	X	
III. CLEANNESS		
A. Any spot or stain clearly noticeable	X	
B. Thread ends not trimmed		X
IV. CROWN		
A. Any section of crown visibly off center		X
B. Any section of crown visibly unequal		X
V. LABEL		
A. Label missing, incorrect, or illegible		X
VI. MEASUREMENTS		
A. Not within tolerance specified	X	

2.3 Inspection levels and AQL's. The inspection levels and acceptable quality levels (AQL'S) expressed in defects per 100 units, for visual and dimensional examinations, shall be as follows:

	AQL's	Inspection level
Major	2.5	II
Total (Major and minor combined)	10.0	II

3. PACKAGING, PACKING AND MARKING

3.1 Packaging. Ten caps shall be neatly flattened and stacked one on top of the other. Each bundle shall be securely tied around the girth with cotton twine or tape, approximately 2 1/2 inches from each end. The finished bundle shall be approximately 11 inches in length, 4 inches in width, and 6 3/4 inches in depth.

3.2 Packing. Sixty caps, packaged as specified in 3.1, shall be packed in a fiberboard shipping container, assembled, closed and reinforced according to type CF, class domestic, variety DW, grade 200, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Caps shall be packed two bundles in length, three bundles in width, and one bundle in depth. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

3.3 Marking. The unit package, intermediate and outer container and the palletized load, as applicable, shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

3.4 Palletization. When specified, see 4.2, caps packed as specified in 3.2, shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded in accordance with means C, K, and L or O or P. Pallet patterns shall be in accordance with apendix of MIL-STD-147. The pallet shall be 4-way, Type IV, Class 1, Size 2; or fabricated from wood group I, II, III, IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified in MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

4. NOTES

4.1 Intended use. The caps are intended to be worn by Navy personnel in cold environments.

4.2 Acquisition requirements. The acquisition document shall specify the following:

(a) Title and date of this document.
(b) When palletization is required (see 3.4)

Preparing Activity:
Navy - NU

Project Number:
8405-N101

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.


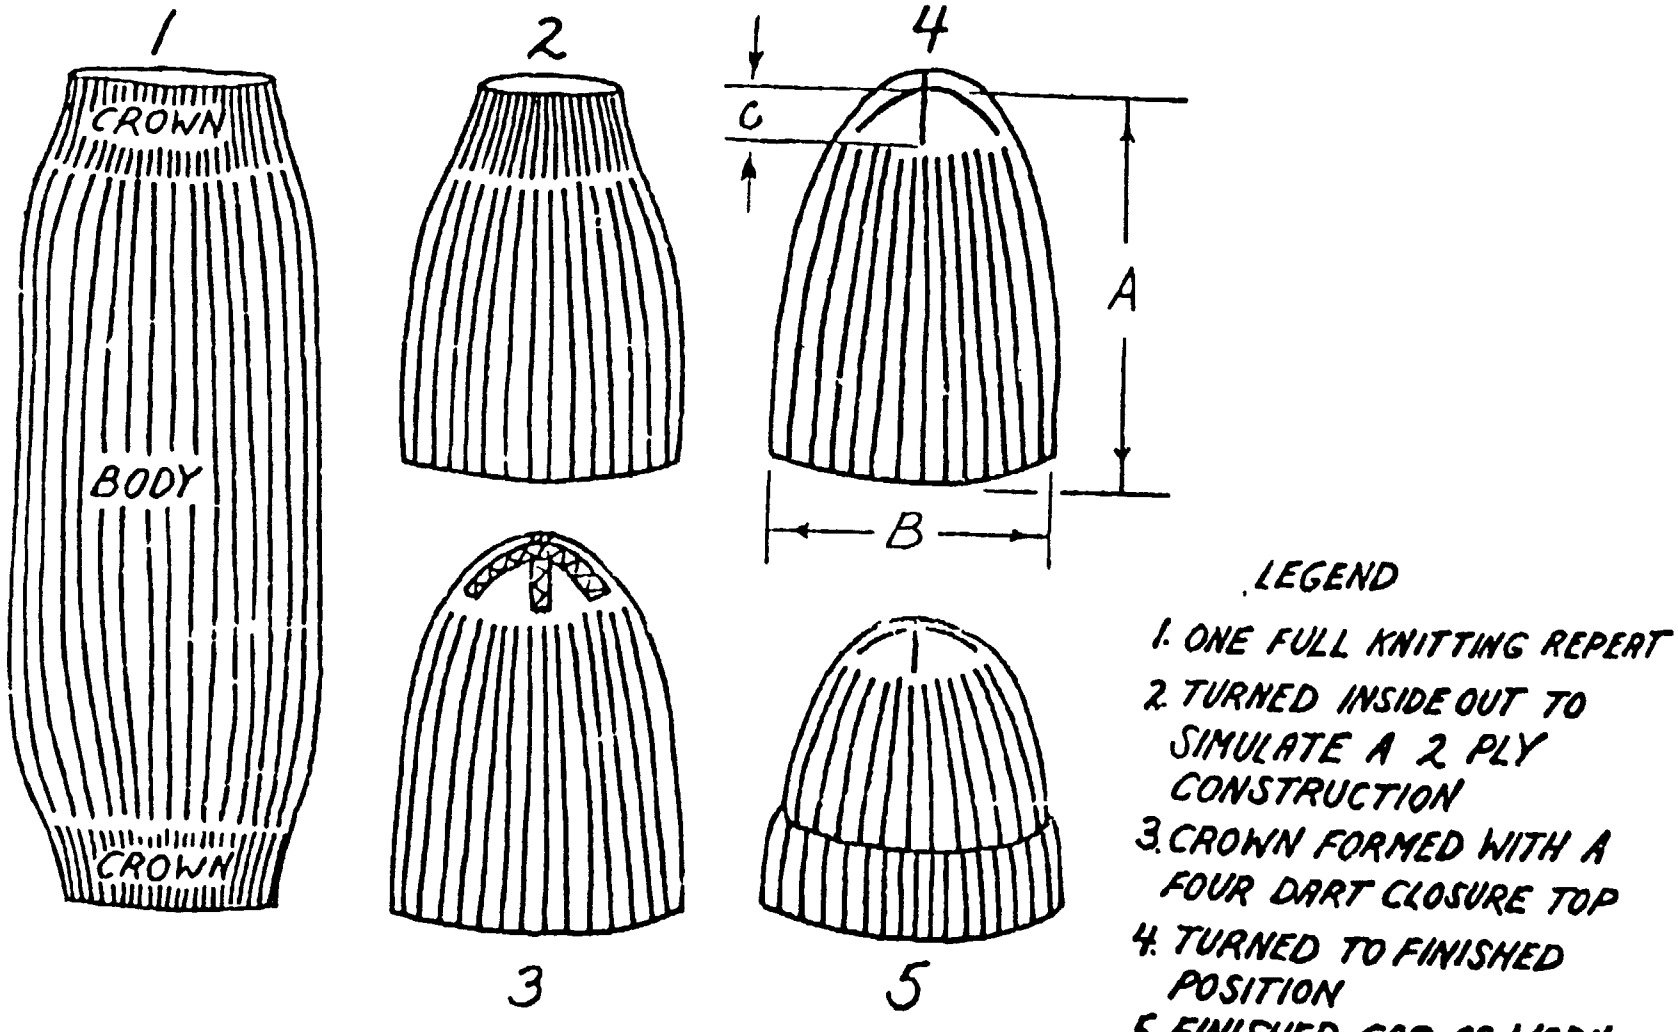


FIGURE 1 - SIMULATED 2 PLY CONSTRUCTION KNIT ('TCH CAP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

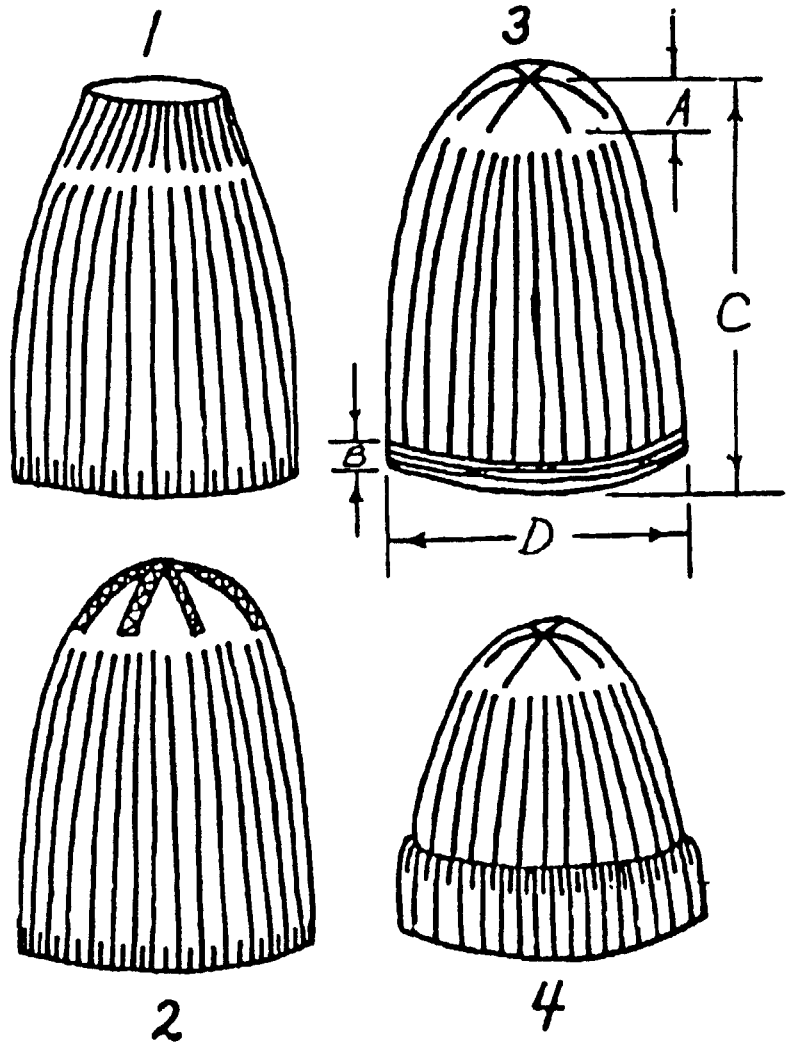

LEGEND

1. SINGLE PLY CONSTRUCTION
2. CROWN FORMED WITH A SIX DART CLOSURE
3. TURNED TO FINISHED POSITION
4. FINISHED CAP AS WORN BOTTOM EDGE TURNED UP

FIGURE 2 - SINGLE PLY CONSTRUCTION KNIT WATCH CAP

☆U.S. GOVERNMENT PRINTING OFFICE 1988 565-021/71573

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
A-A-50369	CAP, KNIT (WATCH)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*. _____

5. PROBLEM AREAS

a. Paragraph Number and Wording.

b. Recommended Wording

c. Reason/Rationale for Recommendation.

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
21 Strath Ave Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.