A-A-50961A
19 June 1989
SUPERSEDING
A-A-50961
27 January 1984

COMMERCIAL ITEM DESCRIPTION

DOG, LATHE

The General Services Administration has authorized the use of this Commercial Item Description.

1. SCOPE

1.1 Scope. This description covers standard and parallel clamp type lathe dogs. The lathe dogs shall be the standard commercial heavy duty quality, which are used in a production environment, and suitable for driving cylindrical work pieces held between machine centers. Parallel clamp type lathe dogs shall be designed to hold hexagonal, square, or irregular shaped workpieces.

1.2 Classification. The lathe dogs shall be of the following types, classes, styles, and sizes. The type, class, style, size, and quantity to be furnished shall be as specified (see 6.2).

Type I - Standard

Class A - Straight tail

Style 1 - Single screw, hexagon socket (safety)

Style 2 - Single screw, square-head

Class B - Bent tail

Style 1 - Single screw, hexagon socket (safety)

Style 2 - Single screw, square-head

Type II - Parallel clamp

Class A - Bent tail

Style 1 - Standard

Style 2 - Safety

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Documents. The following documents of the issue in effect on the date of invitation for bids or request for proposal, form a part of this description to the extent specified herein.

Federal Specification PPP-P-40	- Preservation and Packing of Hand Tools; Tools and Tool Accessories for Power Driven, Metal and Woodworking Machinery
Federal Standard FED-STD-376	- Preferred Metric Units for General Use by the Federal Government.
American Society for Testing and Materials ASTM D 3951	- Standard Practice for Commercial Packaging.
American National Standard Institute ANSI B18.3	- Socket Cap, Shoulders & Set Screws.

3. SALIENT CHARACTERISTICS

3.1 Design. The lathe dog shall be new and of the manufacturer's commercial design in effect on the date of the solicitation. The lathe dog shall meet the requirements specified herein and shall conform to current industrial practice.

3.2 Materials. Materials used in the manufacture of the lathe dog body shall be made of drop forged steel of a quality necessary to produce a product that conforms to the requirements specified herein. The materials used shall be equal to, or better than the quality of a commercial, heavy duty type dog, which is used in a production environment.

3.3 Surface finish. Surface finishes shall be smooth and edges shall be rounded or beveled. Surfaces shall be coated or finished according to the manufacturer's standard design and standard manufacturing process.

3.4 Set screws. Square head screws and hexagon socket type set-screws shall be hardened to not less than C45 Rockwell. The screws shall be of tempered and machined steel, and have a full or half dog point. They shall conform to standards for socket screws in accordance with ANSI B18.3.

3.5 Workpiece capacity. The lathe dogs shall meet the size and capacity requirements of Table I. The requirements of Table I are not less than the figures shown.

3.6 Measurement system. All dimensions in this description are given in US units. These dimensions may be converted to SI units through the use of conversion factors and methods specified in FED-STD-376.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

3.7 Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

TABLE I - Size and workpiece capacity.

Size	Required workpiece capacity in inches		
	Type I Class A and B (Max. Capacity)	Type II Class A-Style 1 (Max. Capacity)	Type II Class A-Style 2 (Range)
1	3/8	1-5/8	3/8 to 1
2	1/2	1-7/8	5/8 to 1-1/2
3	3/4	2-1/2	7/8 to 2
4	1	3-1/4	1-1/4 to 3
5	1-1/4	-----	----------
6	1-1/2	-----	----------
7	1-3/4	-----	----------
8	2	-----	----------
9	2-1/2	-----	----------
10	3	-----	----------
11	3-1/2	-----	----------
12	4	-----	----------
13	5	-----	----------
14	6	-----	----------

NOTE: Where a range is shown, it is from the stated minimum or less, to the stated maximum or greater. Where a specific size is stated, the size requirements may not vary more than 10%.

3.8 Workmanship. Workmanship of the lathe dog shall be of a quality equal to that of comparable products furnished to the commercial market.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection, examination, and test requirements specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections, examinations, and tests set forth in this description where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Sampling inspection. The supplier shall randomly select the number of samples in table II that is applicable to the quantity of items being purchased. Each sample item shall be inspected to determine conformance with the examination in 4.3 and the dimensional inspection in 4.4. Any sample failing to meet all requirements specified herein shall be considered defective. If the number of defective samples is equal to or less than the quantity specified under the "Acceptance number defective" column of table II, the supplier shall replace the defective samples with samples that meet all the requirements specified herein, and the entire lot shall be considered to have passed the sample inspection. If the number of defective samples is equal to or greater than the quantity specified in the "Rejection number defective" column of table II, the entire lot shall be unacceptable. A lot is defined as all items of the same type, style, size, and class presented at one time for acceptance.

TABLE II. Sampling plan.

Quantity of items being purchased	Sample size	Acceptance, number defective	Rejection, number defective
2 to 8	2	0	1
9 to 15	3	0	1
16 to 25	5	0	1
26 to 50	8	1	2
51 to 90	13	1	2
91 to 150	20	2	3
151 to 280	32	3	4
281 to 500	50	5	6
501 to 1200	80	7	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

4.3 Examination. Each lathe dog submitted for sample inspection shall be visually examined to determine conformance with all requirements of this description.

4.4 Dimensional inspection. Each lathe dog submitted for sample inspection shall be inspected to assure conformance with all dimensional and tolerance requirements specified herein.

4.5 Packaging inspection. Packaging shall be inspected for conformance with section 5.

5. PACKAGING

5.1 Preservation, packing, and marking. Unless otherwise specified in the contract or purchase order, preservation, packing, and marking shall be in accordance with ASTM D 3951. When specified (see 6.2) preservation, packing, and marking shall be in accordance with PPP-P-40, level as specified.

6. NOTES

6.1 Intended use. The lathe dog shall be used to hold cylindrical type workpieces, on a lathe, when machining work is held between centers.


6.2 Acquisition. Acquisition documents should specify the following:

a. Title, number, and date of this commercial item description.

b. Type, style, size, class, and quantity required (see 1.2).

c. Packaging in accordance with PPP-P-40, if required, specify level required (see 5.1).

6.3 CID based part identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor. Where applicable, Arabic numbers shall be substituted for Roman numerals.

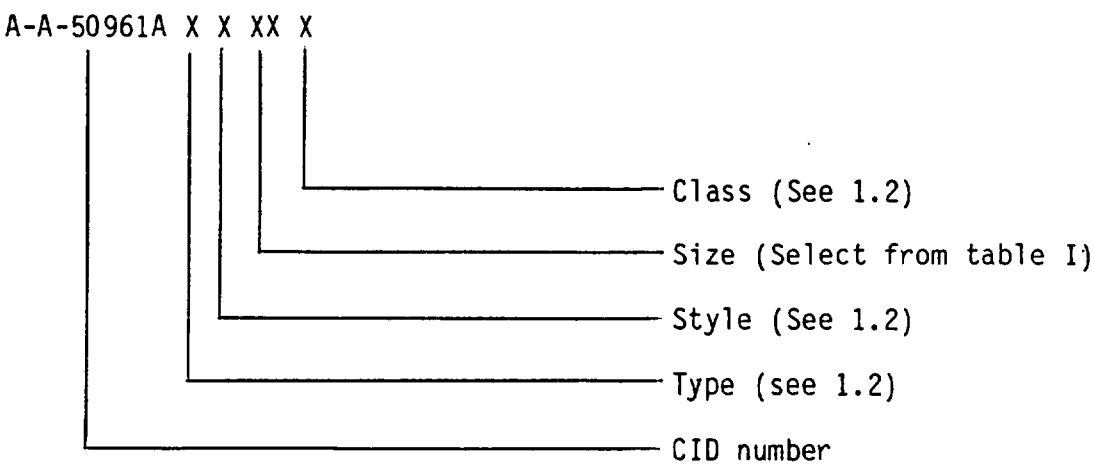

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

MILITARY INTEREST:

Custodians

Army - AL
Air Force - 99

Review Activities

Air Force - 84
DLA - GS

User Activities

Navy - SH, MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

DLA - IP

Project 3460-0136

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
A-A-50961A	Dog, Lathe

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T08:49Z
Check the source to verify that this is the current version before use.