INCH-POUND

A-A-50961B
2 August 2005
SUPERSEDING
A-A-50961A
19 June 1989

COMMERCIAL ITEM DESCRIPTION

DOG, LATHE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers the requirements for standard and parallel clamp type lathe dogs. The lathe dogs are intended for use in a production environment, and suitable for driving cylindrical work pieces held between machine centers. Parallel clamp type lathe dogs shall be designed to hold hexagonal, square, or irregular shaped work pieces.

2. CLASSIFICATION. The lathe dogs shall be of the following types, classes, styles, and sizes. The type, class, style, and size to be furnished shall be as specified.

2.1 Type. (see 7.3(b)).

Type I - standard
Type II - parallel clamp

2.2 Class. (see 7.3(c)).

Class A, type I - straight tail
Class B, type I - bent tail
Class A, type II - bent tail

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: STDZNMGT@dla.mil or Defense Supply Center Richmond (DSCR), ATTN: DSCR-VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616.

AMSC N/A FSC 3460

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.

2.3 Style. (see 7.3(d)).

Style 1, class A and B, type I - single screw, hexagon socket (safety)
Style 2, class A and B, type I - single screw, square head
Style 1, class A, type II - standard
Style 2, class A, type II - safety

2.4 Size. The size of the lathe dogs shall conform to table I (see 7.3(e)).

TABLE I. Size and workpiece capacity.

Size	Required workpiece capacity (inches)		
	Type I, class A and B (max. capacity)	Type II, class A, style 1 (max. capacity)	Type II, class A, style 2 (range)
1	3/8	1-5/8	3/8 to 1
2	1/2	1-7/8	5/8 to 1-1/2
3	3/4	2-1/2	7/8 to 2
4	1	3-1/4	1-1/4 to 3
5	1-1/4	--	--
6	1-1/2	--	--
7	1-3/4	--	--
8	2	--	--
9	2-1/2	--	--
10	3	--	--
11	3-1/2	--	--
12	4	--	--
13	5	--	--
14	6	--	--

Note: Where a range is shown, it is from the stated minimum or less to the stated maximum or greater. Where a specific size is stated, the size requirements may not vary more than 10 percent.

3. SALIENT CHARACTERISTICS

3.1 Design. The lathe dog shall be new and of the manufacturer's commercial design.

3.2 Materials. Materials used in the manufacture of the lathe dog body shall be made of drop forged steel.

3.3 Surface finish. Surface finishes shall be smooth and edges shall be rounded or beveled. Surfaces shall be coated or finished according to the manufacturer's standard design and standard manufacturing process.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.

3.4 Set-screws. Square head screws and hexagon socket type set-screws shall be hardened to not less than 45 on the Rockwell "C" scale. The screws shall be of tempered and machined steel, have a full or half dog point, and conform to standards for socket screws in accordance with ASME B18.3, "Socket Cap, Shoulder, and Set Screws, Hex and Spline Keys (Inch Series)".

3.5 Workpiece capacity. The lathe dogs shall meet the size and capacity requirements of table I. The requirements of table I are not less than the figures shown.

3.6 Measurement system. All dimensions in this description are given in US units. These dimensions may be converted to SI units through the use of conversion factors and methods specified in FED-STD-376, "Preferred Metric Units for General Use by the Federal Government".

3.7 Workmanship. Workmanship of the lathe dog shall be of a quality equal to that of comparable products furnished on the commercial market.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.


6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the acquisition order (see 7.3(f)).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Part or identification number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor.

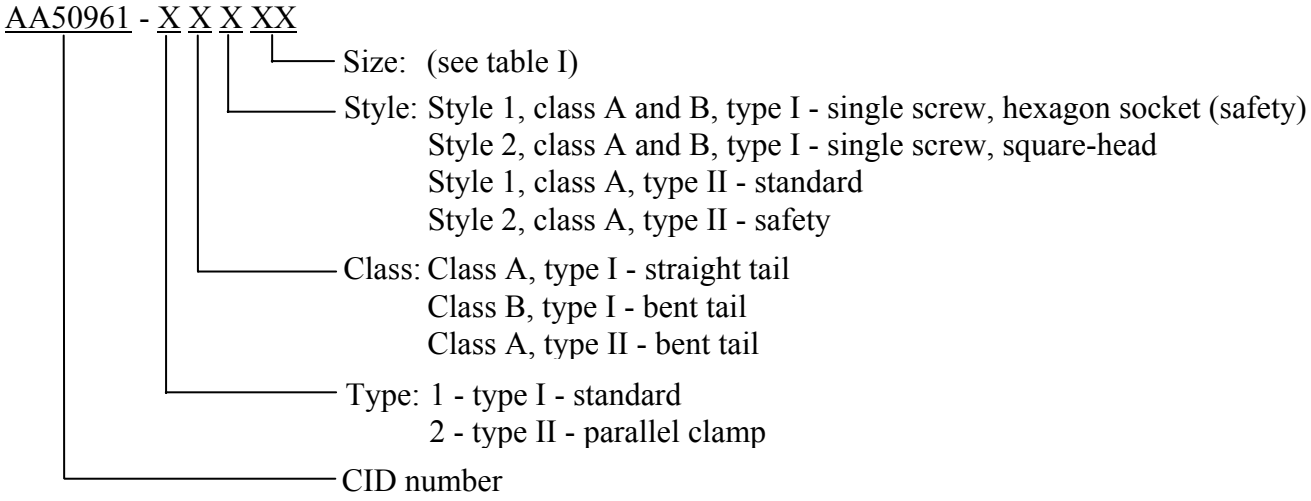

7.2 Sources of documents.

7.2.1 ASME standards. Copies of ASME standards may be obtained from the American Society of Mechanical Engineers, Three Park Avenue, New York, NY 10016-5990. Electronic copies of ASME standards may be obtained from http://www.asme.org/.

7.2.2 Federal specifications and standards. Copies of federal specifications and standards may be obtained from General Services Administration, Federal Supply Service, Specification Section, 470 East L'Enfant Plaza SW, Suite 8100, Washington, DC 20407. Electronic copies of federal specifications and standards may be obtained from http://assist.daps.dla.mil.

7.2.3 FAR. The FAR may be obtained from the Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250-7954. Electronic copies of FAR documents may be obtained from http://www.arnet.gov/far/.

7.3 Ordering data. The acquisition order should specify the following:

a. CID document number, revision, and CID PIN.
b. Type of lathe dog (see 2.1).
c. Class of lathe dog (see 2.2).
d. Style of lathe dog (see 2.3).
e. Size of lathe dog (see 2.4).
f. Packaging requirements (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.

7.4 Subject term (key word) listing.

bent tail
hexagon socket
machine centers
parallel clamp
straight tail

MILITARY INTERESTS:

Custodians:
Navy - SH
Air Force - 99

Review Activities:
Navy - MC
Air Force - 84

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA - FSS

Preparing Activity:
DLA - GS6

(Project 3460-2005-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:48Z
Check the source to verify that this is the current version before use.