NOT MEASUREMENT SENSITIVE

MIL-B-3476/25A
10 May 1991
SUPERSEDING
MIL-B-3476/25
25 June 2968

MILITARY SPECIFICATION SHEET

BRASSARD; PORT PERSONNEL, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3476.

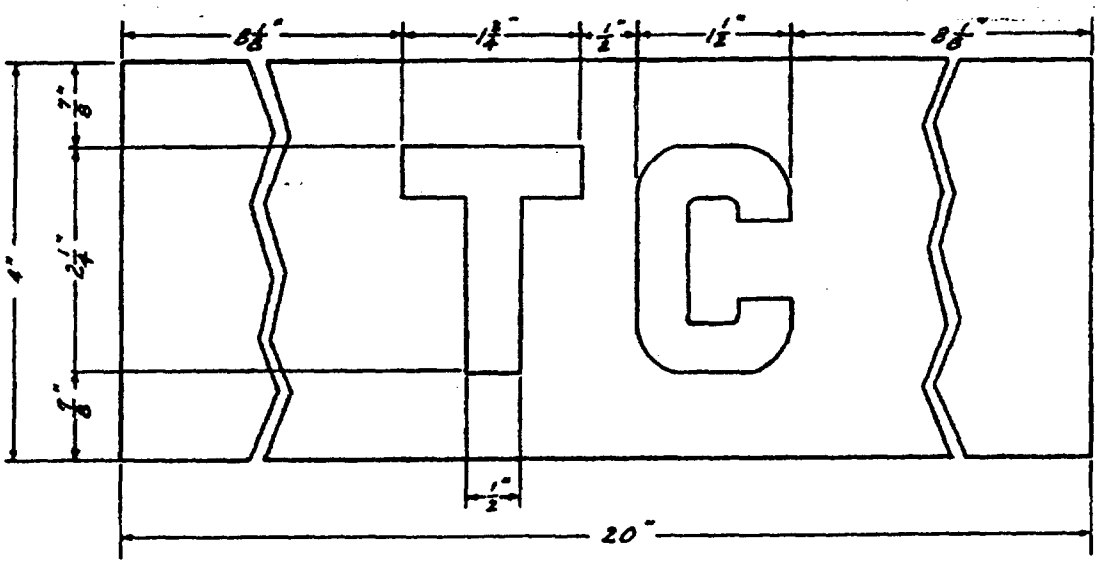

MATERIAL:
BASE: Facing cloth
LETTERING: Felt

COLOR:
BASE: Brick red (Cable No. 65020)
LETTERING: Golden yellow (Cable No. 65001)

CONSTRUCTION DETAILS:
1. Lettering to be appliqued to the base in the location shown with Stitch Type 301 having 16 stitches to the inch.
2. The brassard shall have a 3/8 inch hem on all sides. Hemming shall be accomplished using Stitch Type EFa-1 with 12 stitches to the inch.
3. Thread shall conform to Type IC2, 3 Ply, Ticket No. A of V-T-26. The color of the thread for hemming shall be brick red approximating Cable No. 67113. The color of the thread for appliqueing shall approximate golden yellow Cable No. 67104.
4. The base and letters shall be cut from a single ply of the material specified.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-0119)

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:57Z
Check the source to verify that this is the current version before use.