NOT MEASUREMENT SENSITIVE

MIL-DTL-3476/25B
20 August 1997
SUPERSEDING
MIL-B-3476/25A
10 May 1991

DETAIL SPECIFICATION SHEET

BRASSARD, PORT PERSONNEL, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3476 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

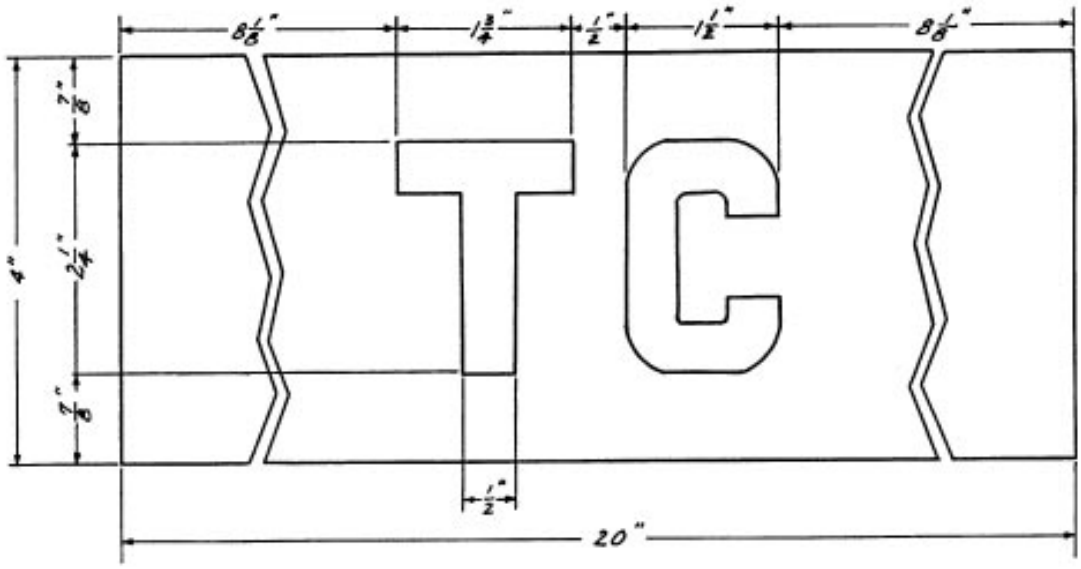

MATERIAL:
BASE: Facing Cloth
LETTERING: Felt

COLOR:
BASE: Brick Red (Cable 65020)
LETTERING: Golden Yellow (Cable 65001)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:57Z
Check the source to verify that this is the current version before use.

CONSTRUCTION DETAILS:

1. Lettering shall be appliquéd to the base in the position shown using Stitch Type 301 with 16 stitches to the inch (see TIOH Drawing Number B-8-35).

2. The thread for hemming and appliquéing shall conform to Type IC2, 3 Ply, Ticket No. A of A-A-52094.

3. The color of the thread for hemming shall conform to Brick Red Cable No. HN 67113. The color of the thread for appliquéing shall conform to Golden Yellow Cable No. HD 67104.

4. The brassard shall have a 3/8 inch (0.95 cm) hem on all sides. Hemming shall be accomplished using Stitch Type EFa-1 with 12 stitches to the inch.

5. Base and lettering shall be cut from a single ply of the material specified.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-0839)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:57Z
Check the source to verify that this is the current version before use.