INCH-POUND


MIL-DTL-3476/25C
21 April 2014
SUPERSEDING
MIL-DTL-3476/25B
20 August 1997

DETAIL SPECIFICATION SHEET

BRASSARD, PORT PERSONNEL, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3476.

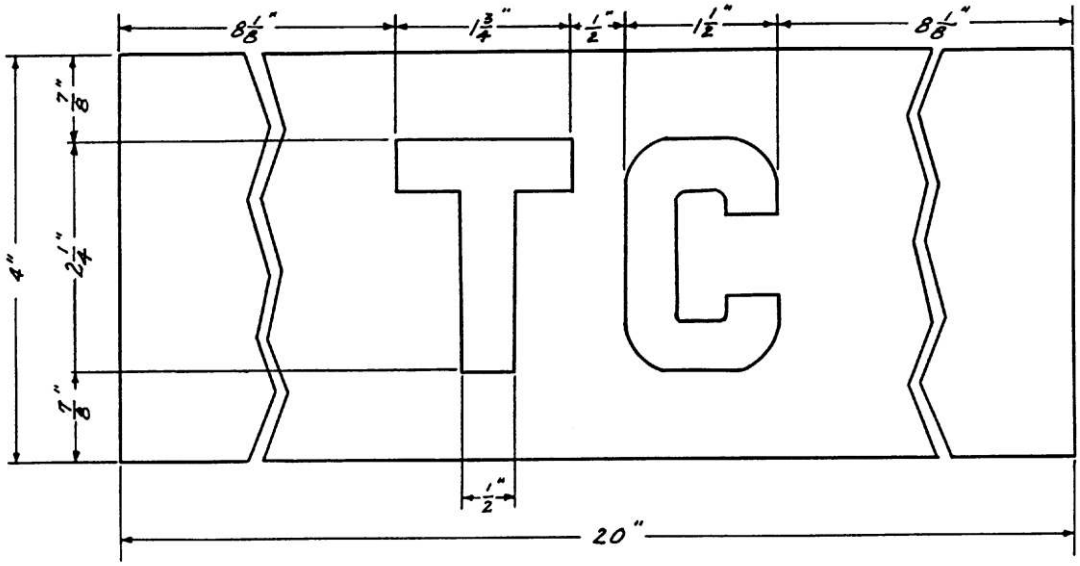

MATERIAL:
BASE: Facing Cloth
LETTERING: Felt

COLOR:
BASE: Brick Red (Cable 65020)
LETTERING: Golden Yellow (Cable 65001)

CONSTRUCTION DETAILS:
1. Lettering shall be appliquéd to the base in the position shown using Stitch Type 301 with 16 stitches to the inch. Lettering shall be located in the position shown (see TIOH Drawing Number B-8-35).

2. The thread for hemming and appliquéing shall conform to Type IC2, 3 Ply, Ticket No. A of A-A-52094

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:57Z
Check the source to verify that this is the current version before use.

3. The color of the thread for hemming shall conform to Brick Red Cable No. HN 67113. The color of the thread for appliquéing shall conform to Golden Yellow Cable No. HD 67104

4. The brassard shall have a 3/8 inch hem on all sides. Hemming shall be accomplished using Stitch Type EFa-1 with 12 stitches to the inch.

5. Base and lettering shall be cut from a single ply of the material specified.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2014-155)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:57Z
Check the source to verify that this is the current version before use.