NOT MEASUREMENT SENSITIVE


MIL-B-3476/26C
27 March 1995
SUPERSEDING
MIL-B-3476/26B
10 May 1991

MILITARY SPECIFICATION SHEET

BRASSARD, SECURITY POLICE, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3476.

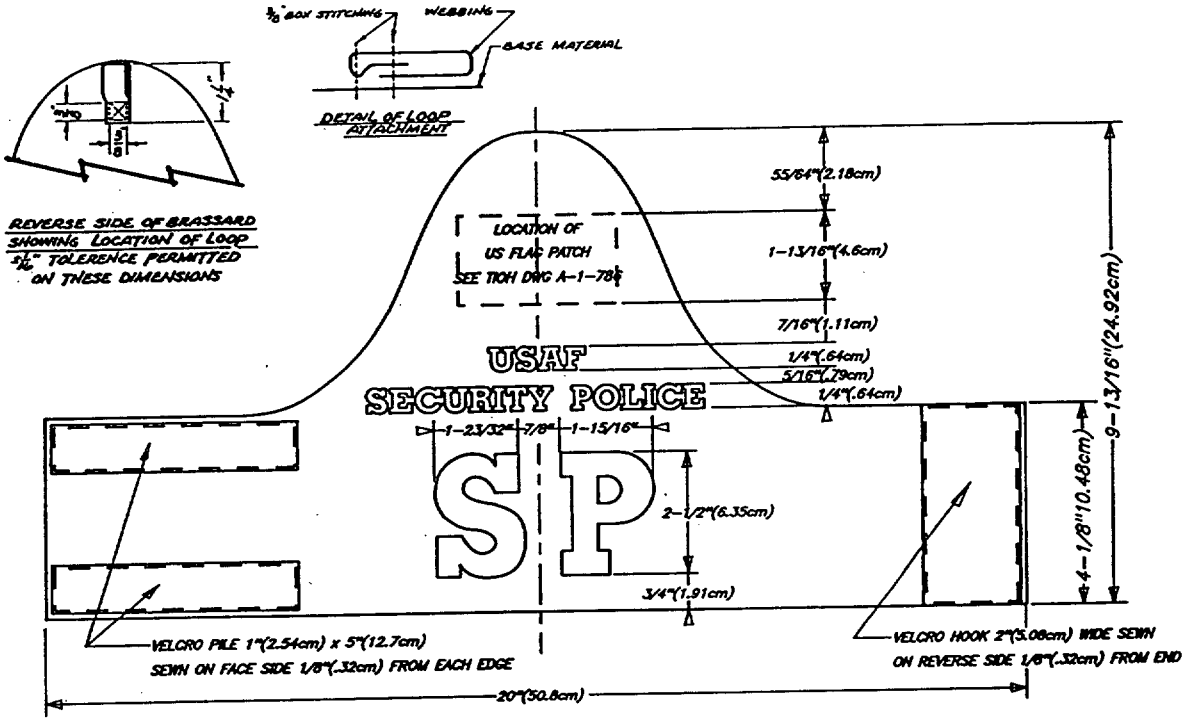

MATERIAL:
BASE: Wool Broadcloth or Facing cloth
LETTERING: Felt

COLORS:
BASE: National Flag Blue (Cable 80077)
LETTERING: Steel (Cable 80141)
THREAD (Applique): Steel (Cable No. Steel HCY 67199)
THREAD (Hem and Loop): Flag Blue (Cable No. Flag Blue HY 67124)

FSC 8455

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:57Z
Check the source to verify that this is the current version before use.

CONSTRUCTION DETAILS:

1. Lettering shall be appliqued to the base in the position shown using Stitch Type 301 having 16 stitches to the inch.

2. The brassard shall have a 3/8 inch hem on all sides. Hemming shall be accomplished using Stitch Type EFa-1 with 12 stitches to the inch.

3. Thread for hemming and appliqueing shall conform to Type IC2, 3 Ply, Ticket No. A of A-A-52094. The color of the thread for hemming shall be Flag Blue conforming to Cable No. Flag Blue HY 67124. The color of the thread for appliqueing shall be Steel conforming to Cable No. Steel HCY 67199.

4. Base and letters shall be cut from a single ply of the material specified.

5. All letters shall be as indicated on TIOH Drawing B-8-58.

6. The loop shall be located on the vertical center line of the brassard with the base 1-1/4 inches ± 1/16 inch (3.18 cm ± 0.04 cm) below the top edge of the brassard and shall be attached to the back of the brassard as shown. A bar tack may be used to secure the loop in lieu of box stitching at the option of the manufacturer. However, the ends of the tape must be secured and completely covered by the stitching. The thread for stitching the loop shall conform to Type IC2, 3 Ply, Ticket No. A of A-A-52094.

7. The attaching device shall be hook and pile, Light Navy Blue (shade 3368) and conform to Type II, Class 1 of MIL-F-21840. The hook and pile fastener shall be positioned and secured to the base fabric as shown using Stitch Type 301 with 12 stitches per inch.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0801)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:57Z
Check the source to verify that this is the current version before use.