NOT MEASUREMENT SENSITIVE

MIL-DTL-3476/26D
20 August 1997
SUPERSEDING
MIL-B-3476/26C
27 March 1995

DETAIL SPECIFICATION SHEET

BRASSARD, SECURITY POLICE, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3476 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

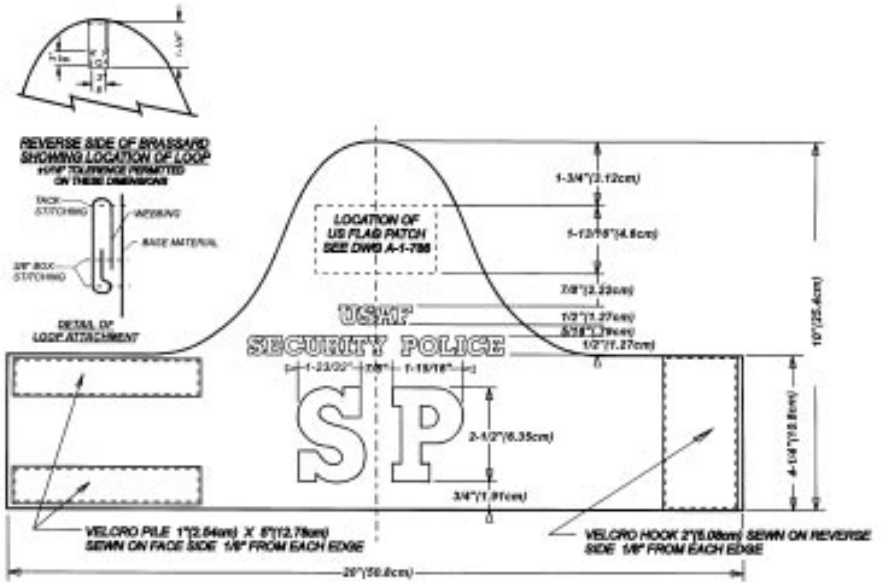

MATERIAL:
- BASE: 100% Lightweight Acrylic, Plain Weave, Weighing at least 8 ounces
- LINING: 50% Polyester//50% Cotton Blend, Plain Weave, Weighing at least 8 ounces
- LOOP: Cotton Tape

COLORS:
- BASE: Blue (Cable HX 67123)
- LINING: Black (Cable HAN 67138)
- LETTERING: Steel (Cable HCY 67199)
- THREAD: Blue (Cable No. HY 67123)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:57Z
Check the source to verify that this is the current version before use.

CONSTRUCTION DETAILS:

1. Lettering shall be embroidered to the base in the position shown.

2. The brassard shall be lined. The lining and base material shall be turned under 1/4 inch (0.64 cm) and hemmed using Stitch Type EFa-1 with 12 stitches to the inch.

3. Base shall be cut from a single ply of the material specified.

4. All letters shall be as indicated on TIOH Drawing B-8-58.

5. The loop shall be located on the vertical center line of the brassard with the base 1-1/4 inches ± 1/16 inch (3.18 cm ± 0.04 cm) below the top edge of the brassard and shall be attached to the back of the brassard as shown. A bar tack may be used to secure the loop in lieu of box stitching at the option of the manufacturer. However, the ends of the tape must be secured and completely covered by the stitching. The top of the loop shall be caught in the hem and stitched to the lining. The thread for stitching the loop shall conform to Type IC2, 3 Ply, Ticket No. A of A-A-52094.

6. The attaching device shall be hook and pile conforming to Type II, Class 1 of MIL-F-21840. The hook shall be Black HAN 67138 and the pile shall be Blue HX 67123. The hook and pile shall be positioned and secured to the base fabric as shown using Stitch Type 301 with 12 stitches per inch.

7. A hook and pile fastener shall be used to attach the U.S. Flag patch in the location shown. The U.S. Flag patch shall be manufactured in accordance with TIOH Drawing Number A-1-786 and MIL-I-14652. The hook and pile shall measure 2 inches by 3 inches (5.08 cm by 7.62 cm) and match Blue HX 67123. The hook shall be attached to the patch and the pile shall be attached to the base material using Stitch Type 301 with 12 stitches per inch. The thread shall conform to Type IC2, 3 ply, Ticket No. A of A-A-52094.

Custodian:
Army - IH
Air Force -45

Preparing activity:
Army - IH

Review activity:
Air Force 32, 82, 99
DLA - CT

(Project No. 8455-0839)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:57Z
Check the source to verify that this is the current version before use.