INCH-POUND

MIL-DTL-3476/26F
12 March 2019
SUPERSEDING
MIL-DTL-3476/26E
5 May 2014

# DETAIL SPECIFICATION SHEET

## BRASSARD, SECURITY POLICE, U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3476.




MATERIAL:
BASE: 100% Lightweight Acrylic, Plain Weave, Weighing at least 8 ounces
LINING: 50% Polyester//50% Cotton Blend, Plain Weave, Weighing at least 8 ounces
LOOP: Cotton Tape

COLORS:
BASE: Blue (Cable HX 67123)
LINING: Black (Cable HAN 67138)
LETTERING: Steel (Cable HCY 67199)
THREAD: Blue (Cable HY 67123)

CONSTRUCTION DETAILS:
1. Lettering shall be embroidered to the base in the position shown.

2. The brassard shall be lined. The lining and base material shall be turned under 1/4 inch and hemmed using Stitch Type EFa-1 with 12 stitches to the inch.

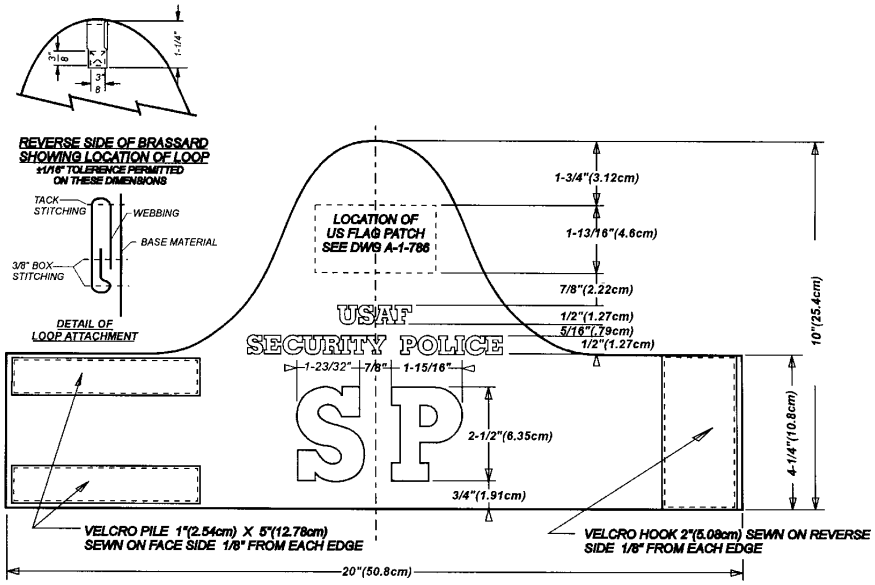

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:57Z
Check the source to verify that this is the current version before use.

3. Base shall be cut from a single ply of the material specified.

4. All letters shall be as indicated on The Institute of Heraldry (TIOH) Drawing B-8-58.

5. The loop shall be located on the vertical center line of the brassard with the base 1-1/4 inches ± 1/16 inch below the top edge of the brassard and shall be attached to the back of the brassard as shown. A bar tack may be used to secure the loop in lieu of box stitching at the option of the manufacturer. However, the ends of the tape must be secured and completely covered by the stitching. The top of the loop shall be caught in the hem and stitched to the lining. The thread for stitching the loop shall conform to Type IC2, 3 Ply, Ticket No. A of A-A-52094

6. The attaching device shall be hook and pile conforming to Type II, Class 1 of A-A-55126. The hook shall be Black HAN 67138 and the pile shall be Blue HX 67123. The hook and pile shall be positioned and secured to the base fabric as shown using Stitch Type 301 with 12 stitches per inch.

7. A hook and pile fastener shall be used to attach the U.S. Flag patch in the location shown. The U.S. Flag patch shall be manufactured in accordance with TIOH Drawing Number A-1-786 and MIL-DTL-14652. The hook and pile shall measure 2 inches by 3 inches and match Blue HX 67123. The hook shall be attached to the patch and the pile shall be attached to the base material using Stitch Type 301 with 12 stitches per inch. The thread shall conform to Type IC2, 3 ply, Ticket No. A of A-A-52094

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2019-135)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:57Z
Check the source to verify that this is the current version before use.