[INCH-POUND]
A-A-2664
March 24, 1993

COMMERCIAL ITEM DESCRIPTION

FLATWARE, STAINLESS STEEL

The General Services Administration has authorized the use of this commercial item description in lieu of RR-F-450.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This commercial item description covers stainless steel graded and ungraded flatware of the pattern commonly known as "Windsor".

1.2 Classification. The flatware shall be of the following types, items, and styles, as specified (see 6.1):

Type 1 - Graded

Item I - Knife

Style 1 - (See 6.3)
2 - Serrated, table
3 - (See 6.3)

Item II - Fork

Style 1 - Utility, table
2 - (See 6.3)
3 - (See 6.3)
4 - (See 6.3)

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor St., Fort Worth, TX 76102

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 7340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

Item III - Spoon

Style 1 - Tea
2 - Dessert
3 - Table, large
4 - Iced tea
5 - Bouillon

Type 2 - Ungraded

Item I - (See 6.3)
Item II - Fork
Item III - Spoon

Style 1 - Tea
Style 2 - Table, medium (dessert)
Style 3 - Table, large

2. APPLICABLE DOCUMENTS

2.1 The documents referenced in this commercial item description shall be the issues in effect on the date of issuance of the invitation for bids or request for proposal unless otherwise specified. These documents form a part of this commercial item description to the extent specified. In the event of a conflict between this commercial item description and a document referenced herein, this commercial item description shall take precedence.

Federal Standard:

FED-STD-376 - Preferred Metric Units For General Use By The Federal Government.

Copies of Federal standards are available from the General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA, and the GSA Specifications Unit (3FBP-W), 7th and D Streets S.W., Washington, DC 20407.

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

Copies of military standards may be obtained from Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

ASTM Standards:

A 167 - Stainless and Heat Resisting Chromium-Nickel Steel Plate, Sheet and Strip.
A 176 - Stainless and Heat Resisting Chromium Steel Plate, Sheet and Strip.
A 276 - Stainless and Heat Resisting Steel Bars, and Shapes.
E 18 - Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials.
E 29 - Standard Practice For Using Significant Digits In Test Data To Determine Conformance With Specifications.

Application for copies of ASTM standards should be addressed to ASTM, 1916 Race Street, Philadelphia, PA 19103.

3. SALIENT CHARACTERISTICS

3.1 Material. The flatware shall be fabricated from stainless steel in accordance with types 301, 302, or 304 of ASTM A 167, or type 430 of ASTM A 176. As an alternative, the knife may be fabricated from stainless steel in accordance with types 410 or 420, condition A, of ASTM A 276.

3.2 Design and construction. Type 1 flatware shall be graded construction and type 2 flatware shall be ungraded construction. The flatware shall be of single piece construction of the stainless steel specified in 3.1 and shall conform to the requirements specified herein.

3.2.1 Type 1, item I, style 2 knife. The knife shall be shaped as shown on figure 1, and shall conform to dimensions shown in table I. All edges except the cutting edge shall be rounded and smooth. The cutting edge of the knife shall be uniformly, continuously, and distinctly serrated in accordance with the manufacturer's standard practice provided the serrations (flutes) fully extend a minimum of 1-3/4 inches (4.4 cm) from the blade tip. The top edge of the blade shall taper uniformly from the blade tip to a point not more than 3/4 inch (1.9 cm) from the handle. Blades shall have an average Rockwell hardness between C38 and C53 (see 4.7.2.1). Knife blades shall show no trace of copper when tested using a copper sulfate solution (see 4.7.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

3.2.2 Type 1, item II, fork. Forks shall have the shapes shown on figure 2 and shall conform to dimensions shown in table II. Shank and tines shall have an average Rockwell hardness not less than B85 (see 4.7.2.2). All edges shall be rounded and smooth and the back of the handle shall be concave in accordance with the manufacturer's standard practice. The width and thickness of tines shall taper and shall be pointed at the ends. Inside edges of tines shall be finished so as to keep top and bottom inside edges well rounded.

3.2.3. Item III, Spoons. Spoons shall be of the shapes shown on figures 3 through 7 and shall conform to dimensions specified in tables III through VII. The shanks of spoons shall have an average Rockwell hardness not less than B85 (see 4.7.2.3). All edges of handles and bowls shall be rounded and smooth. The back of the spoon handles shall be concave in accordance with the manufacturer's standard practice.

3.3 Type 2 flatware. Type 2 flatware dimensions shall be as follows:

Item	Minimum thickness 1/ inch (mm)	Minimum length O/A inches (cm)
Fork	0.055 (1.4)	6-15/16 (17.6)
Teaspoon	0.043 (1.1)	5-15/16 (15.1)
Tablespoon, medium (dessert)	0.048 (1.2)	7 (17.8)
Tablespoon, large	0.048 (1.2)	7-15/16 (20.1)

1/ Thickness is constant throughout the length of the item except for fork tines.

Shanks, tines and bowls shall have a minimum Rockwell hardness of B85 when tested as specified in 4.7.2.2 or 4.7.2.3, as applicable. All edges shall be broken by grinding, coining, tumbling or vibrating. Shanks shall be beaded, concaved, or stiffened in accordance with the manufacturers standard practice. Fork tines shall be tapered and inside edges of the tines shall be ground, coined or formed so as to keep top and bottom inside edges well rounded.

3.4 Finish. After fabrication, flatware shall be free of all rough and protruding edges. Type I knives, forks, and spoons shall be given a No. 7 commercial finish or a bright or mirror finish on all surfaces except exterior edges and between the fork tines. Type 2 flatware shall be given a bright or mirror finish on all surfaces and edges except between fork tines. All flatware shall be free of discoloration and stains.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

3.5 Marking for identification. The manufacturer's name, trade name or trademark of such known character easily identifiable with said manufacturer shall be applied. The marking shall be indented or embossed on the back of the shank of forks and spoons and on the handle or blade of knives adjacent to the blade or handle in accordance with the manufacturer's standard practice. The surface opposite the markings shall show no signs of penetration.

3.6 Workmanship. The finished flatware shall be clean and smooth and shall not contain any burrs, rough die, tool, gouge, or grind marks or burn marks. The finished items shall not be fractured, dented, bent, punctured, or malformed. There shall be no defects which may impair serviceability, durability or appearance.

3.7 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

3.8 Measurement system. The values stated in inch-pound units are to be regarded as the standard. The values stated in parentheses are for informational purposes only.

3.9 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch/pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this commercial item description are met.

3.10 Commercial item. The use of the term "commercial item description" in this document does not imply that any item or items offered are not required to conform with all requirements specified herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Certification. The contractor shall certify, and maintain objective quality evidence, that the product offered meets this commercial item description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

4.2 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.3 Sampling. The levels of inspection and acceptable quality levels (AQL's) shall be in accordance with MIL-STD-105.

4.4 Lot formation. All knives, forks, or spoons from the same manufacturer of the same type, item and style offered for delivery at one time shall be considered a lot for purposes of inspection and testing.

4.5 Sampling for visual and dimensional examination. A random sample of flatware shall be selected from each lot in accordance with inspection level S-4, AQL 4.0 expressed in terms of defects per hundred units. The sample unit shall be one finished item of flatware. The sample flatware shall be visually and dimensionally examined to verify compliance with table VIII and the remainder of this commercial item description. All dimensions are absolute as defined in ASTM E 29.

TABLE VIII - Classification of defects

Examine	Defect
Finish	Type 1 flatware not equal to a commercial No. 7 finish or a mirror, or bright finish except fork tines and all exterior edges. Fork tines not smooth. Evidence of discoloration, or stains. Type 2 finish not as specified.
Construction and Workmanship	Any burrs, slivers, sharp edges, rough die marks, or tool gouge. Any knife, fork, or spoon fractured, dented, or malformed. Not single piece construction.
Knives	All edges, except the cutting edge, not rounded and smooth (except cutting edge). Cutting edge serrations not uniformly, continuously, and distinctly serrated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

TABLE VIII - Classification of defects (Cont.)

Examine	Defect
Knives	Top of knives not tapered back from the point.
Forks	Edge of tines not rounded. Tines not tapered. Inside of tines not finished as specified. All outer edges not rounded and smooth. Handle not as specified i.e., not concave.
Spoons	Edges of bowl and handle not rounded or smooth. Bowl edge split. Spoon handle not concave.
Marking	Missing, incomplete, or illegible. Surface opposite marking is penetrated. Surface opposite marking is uneven.

4.6 Sampling for tests. Type I, item I, style 2 knives shall be tested as specified in 4.7.1. All flatware shall be tested in accordance with 4.7.2. The inspection level for both tests shall be S-2.

4.7 Tests.

4.7.1 Corrosion tests. Knives shall be tested for corrosion-resistance. Test samples shall be scrubbed with soap and warm water, rinsed in hot water, followed by a dip in ethyl alcohol (95 percent) and dried. Three drops of copper-sulfate solution shall be placed at intervals upon the blade surface of the knife undergoing the test. After the solution has been allowed to remain on the surface for 6 minutes, the solution shall be removed by a cloth saturated in clean water and the surface checked. Inability of the knives to meet requirements in 3.2.1 shall constitute failure of the test. The copper-sulfate solution shall be made as follows:

Copper-sulfate ($CuSO_4$ - 5 H_2O)	4.0 grams
Sulfuric Acid (H_2SO_4) (sp. gr. 1.84)	10.0 milliliters
Water (H_2O)	90.0 milliliters

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

4.7.2 Hardness tests. Flatware items shall be prepared and tested for hardness in accordance with ASTM E 18. Hardness tests shall be made in the locations specified in 4.7.2.1 through 4.7.2.3 for the item specified. Any average hardness reading not falling within the specified hardness limits will be cause for rejection of the lot being tested.

4.7.2.1 Type 1, item I, style 2 knife. If necessary for the performance of this test, the knife blade may be ground parallel where the hardness test is to be performed. When grinding is accomplished, care shall be taken not to overheat the metal. Three readings shall be taken on the blade of the knives, located at points 1/2 inch (1.3 cm) from the end, midway, and 1/2 inch (1.3 cm) from NN as shown on figure 1 to determine conformance to 3.2.1.

4.7.2.2 Types 1 and 2, item II, forks. One reading on each style fork midway between AA and BB; one reading between BB and CC; and one reading within 3/8 inch (0.95 cm) of CC on the handle as shown on figure 2 shall be taken to determine conformance to 3.2.2 for type 1, item II forks. Type 2 fork readings shall be taken in the locations similar to figure 2 to determine conformance to 3.3.

4.7.2.3 Types 1 and 2, item III, spoons. One reading on each style spoon at DB; one reading midway between CC and AA; and one reading midway between AA and BB as shown on figure 3 through 7 shall be taken to determine conformance to 3.2.3 and 3.3, as applicable.

4.8 Examination for preparation for delivery. A random sample of shipping containers shall be selected from each lot for examination of the unit, intermediate and shipping containers (as applicable) for conformance with the packaging, packing, and marking required in the contract or order. Samples shall be selected in accordance with inspection level S-2, AQL 6.5, expressed in terms of defects per hundred units. The sample unit shall be one shipping container.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking. The packaging, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable):

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

a. Title, number and date of this commercial item description.
b. Type, item and style of flatware required (see 1.2).
c. The packaging, packing, and marking required.

6.2 CID based part identification numbering. Flatware conforming with this commercial item description shall be identified by a part number configuration consisting of identification of a portion of the CID number, type, item, and style. An example of the part identification number configuration is shown below. This part identification numbering system is intended for identification and cross-indexing of the item within the Federal cataloging system. Part identification numbers are not required to be placed on the product or container.

Part Identification Numbering System for CID A-A-2664

```
AA2664-1I2        Example - Type 1, Item I, Style 2,
   |   |||                    Serrated table knife
   |   |||
   |   |||___ Style (1, 2, 3, 4, or 5).
   |   |
   |   |___ Item (I, II, or III).
   |
   |___ Type (1 or 2).
   |
   |___ General commercial item description number
```

6.3 Supersession data. The following items, previously defined by RR-F-450D, have been deleted from this commercial item description:

Type 1, Item I, Styles 1 and 3
Type 1, Item II, Styles 2, 3 and 4
Type 2, Item I

6.4 National Stock Numbers (NSN's). The following is a list of NSN's assigned which correspond to this CID. The list may not be indicative of all possible NSN's associated with this CID.

NSN	Type	Item	Style	Item Name
7340-00-060-6057	1	I	2	Knife, Table
7340-00-080-5956	2	III	1	Spoon, Tea
7340-00-205-3340	1	III	1	Spoon, Tea
7340-00-205-3341	1	III	3	Spoon, Table
7340-00-241-8169	1	II	1	Fork, Table
7340-00-241-8171	1	III	2	Spoon, Dessert
7340-00-559-8357	1	III	4	Spoon, Iced Tea

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

NSN	Type	Item	Style	Item Name
7340-00-634-2844	2	II		Fork, Table
7340-00-634-2862	2	III	3	Spoon, Table
7340-00-634-2863	2	III	2	Spoon, Dessert
7340-00-688-1055	1	III	5	Spoon, Bouillon

Military Coordinating Activity:

Army - GL

Custodians:
Army - GL
Navy - SA
Air Force - 99

Civil Agency Coordinating Activity:

VA - OSS

Review Activities:
Army - MD, TS
Air Force - 84

PREPARING ACTIVITY:

GSA - FSS

User Activity:
Navy - MC

(DoD Project 7340-0094)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

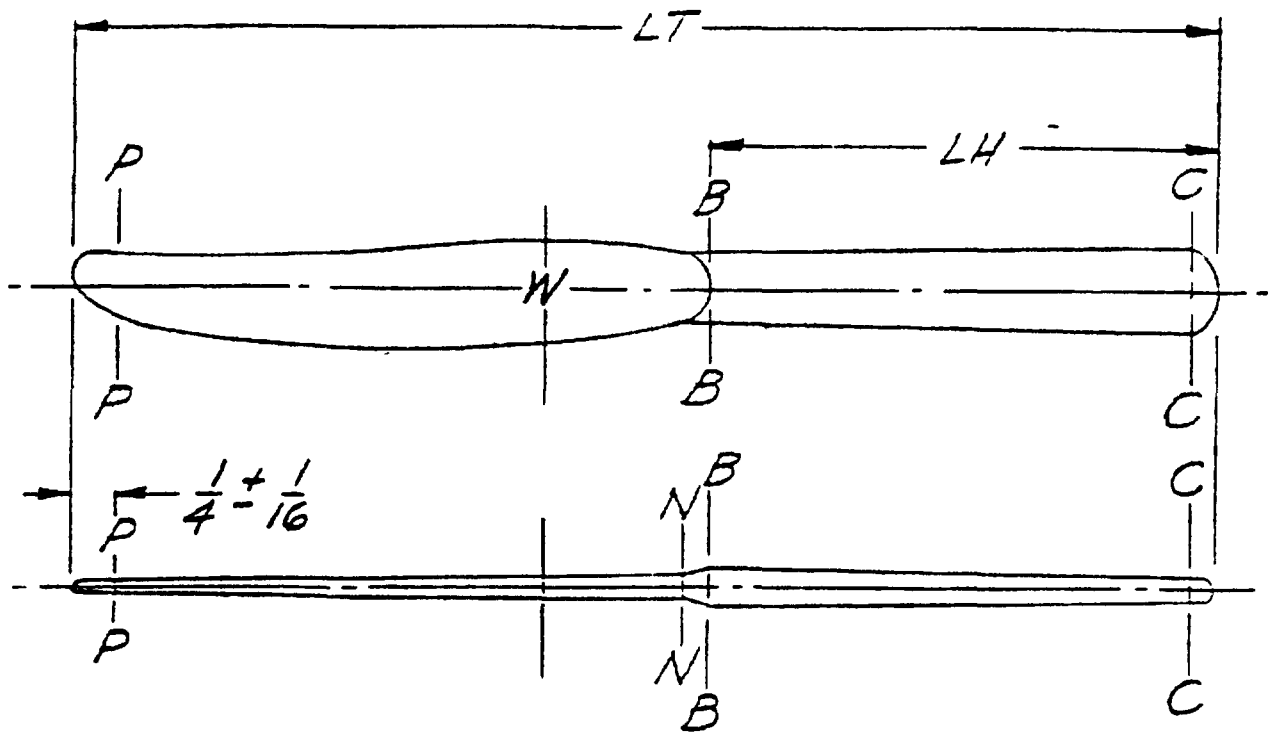


FIGURE 1 - Knife, type 1, item I, style 2

TABLE I - Type 1, item I, style 2, knife

Measurements	Dimensions (inches) Minimum	Maximum
Overall length, LT	8-3/8	9-1/16
Handle length, LH	3-3/4	4-1/4
Widest blade section, W	0.705	0.790
Width at end of neck radius on handle, BB	0.475	0.540
Thickness at end of neck radius on handle, BB	0.215	0.280
Width of handle at end of radius, CC	0.575	0.660
Thickness of handle at end of radius, CC	0.185	0.215
Blade thickness where radius starts, NN	0.070	0.115
Blade thickness (point), PP	0.025	0.045

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

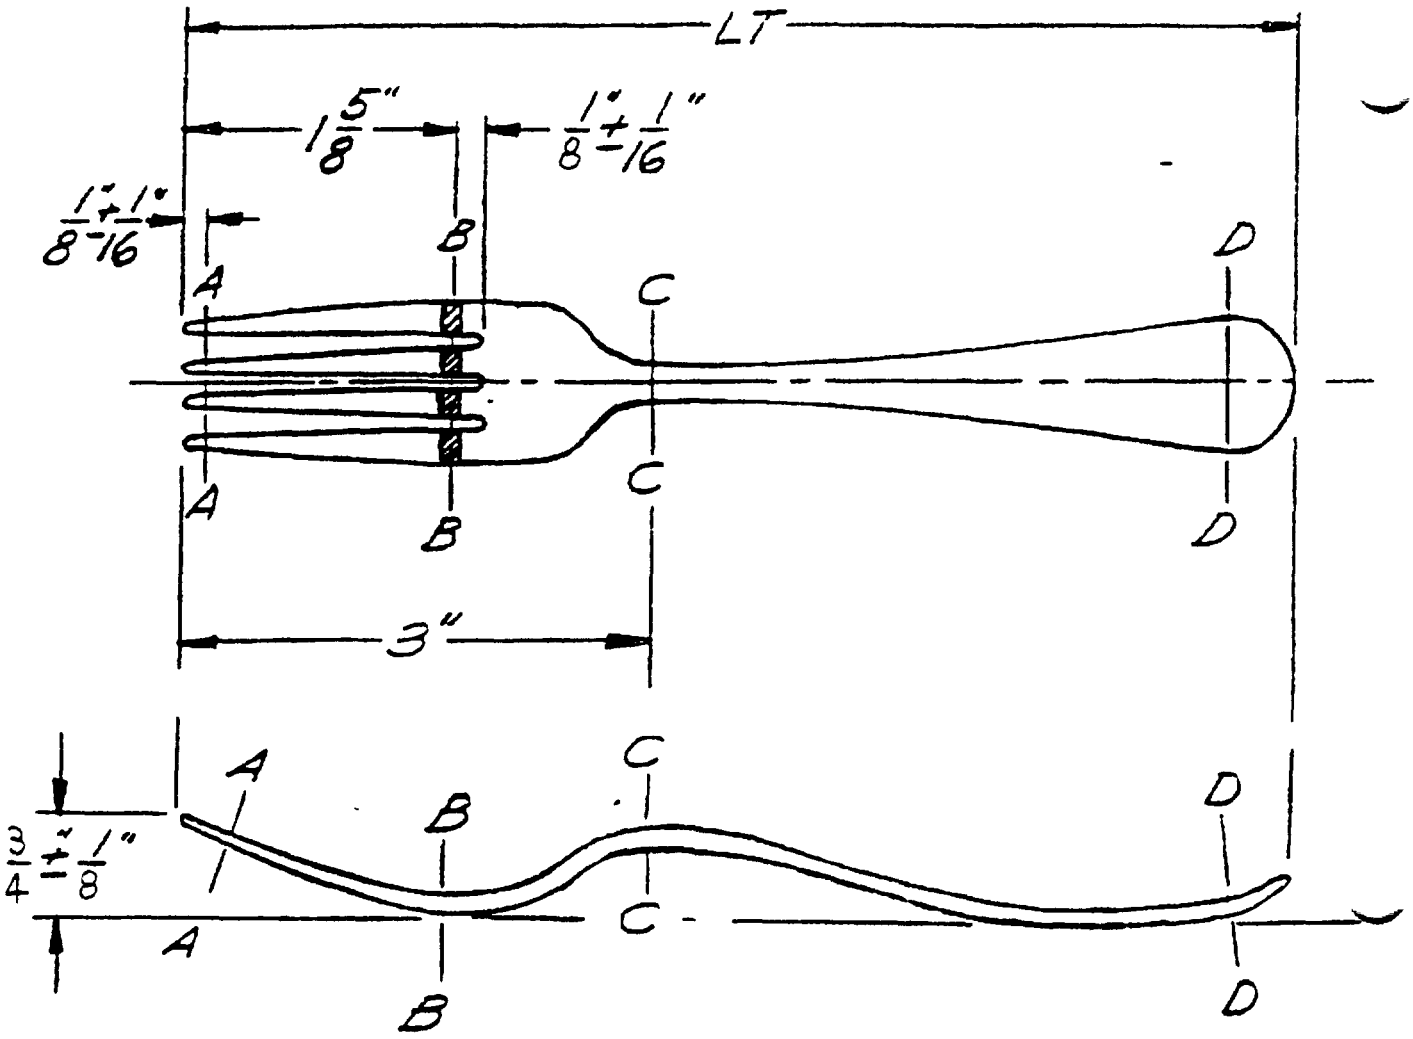


FIGURE 2 - Fork, utility, type 1, item II, style 1

TABLE II - Type 1, item II, style 1, utility fork

Measurements	Dimensions (inches) Minimum	Maximum
Overall length, LT	6-15/16	7-1/8
Width at AA (⅛" from tip of tine)	0.700	0.775
Thickness at AA (⅛" from tip of tine)	0.060	0.080
Width at BB (⅛" from base of tine)	0.900	0.950
Thickness at BB (⅛" from base of tine)	0.072	0.095
Width at CC (at narrowest section)	0.190	0.260
Thickness at CC (at narrowest section)	0.072	0.135
Maximum width of handle, DD	0.735	0.860
Thickness at widest point of handle, DD	0.060	0.095
Tine Length, TL	1-3/4	1-15/16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

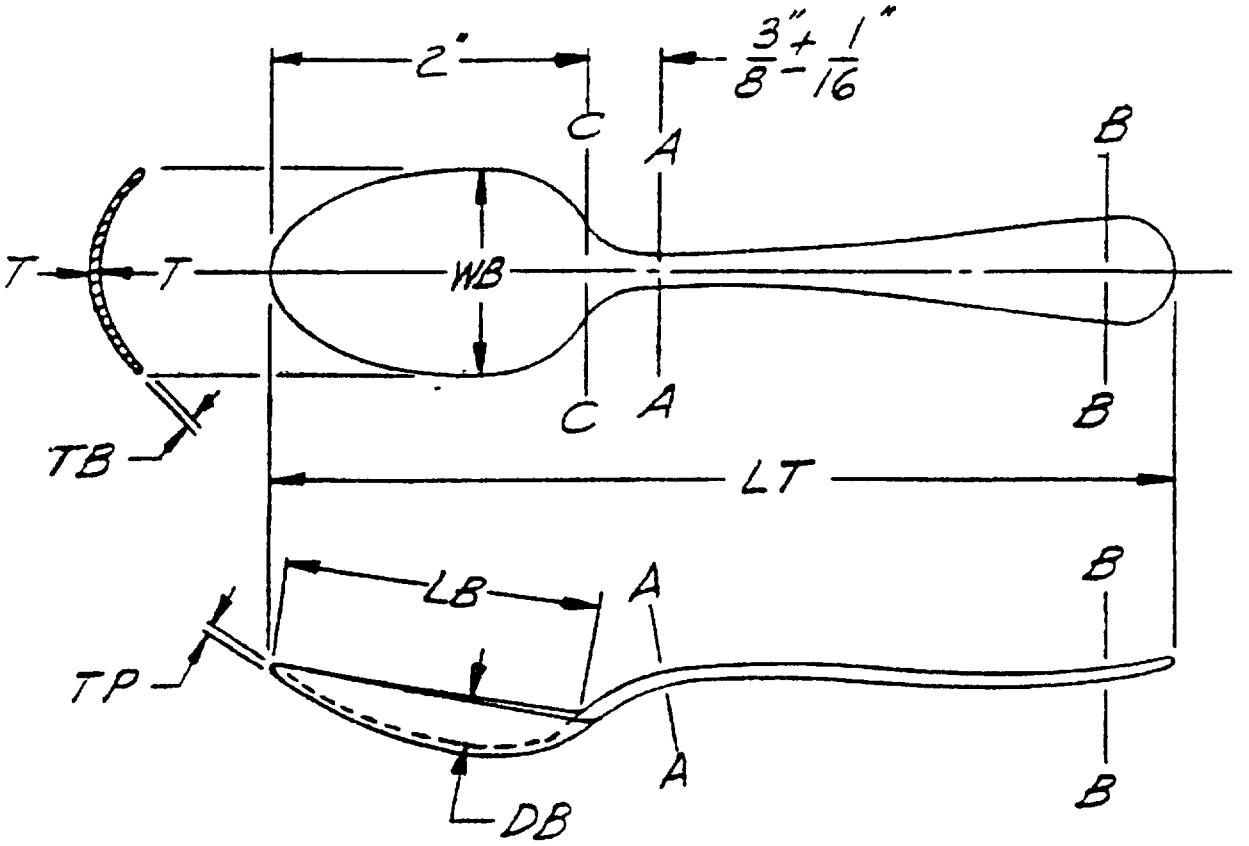


FIGURE 3 - Teaspoon, type 1, item III, style 1

TABLE III - Type 1, item III, style 1, teaspoon

Measurements	Dimensions (inches) Minimum	Maximum
Overall length, LT	5-15/16	6-1/16
Bowl length, LB	1-15/16	2-1/16
Width of bowl at widest point, WB	1-7/32	1-5/16
Depth of bowl at deepest point (inside), DB	0.225	0.275
Width of section AA	0.190	0.235
Thickness at section AA	0.070	0.100
Maximum width of handle, BB	0.685	0.750
Thickness at widest point of handle, BB	0.065	0.085
Edge thickness at WB, TB	0.030	0.050
Edge thickness at bowl point, TP	0.025	0.045
Thickness of bowl bottom at WB, TT	0.035	0.050

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

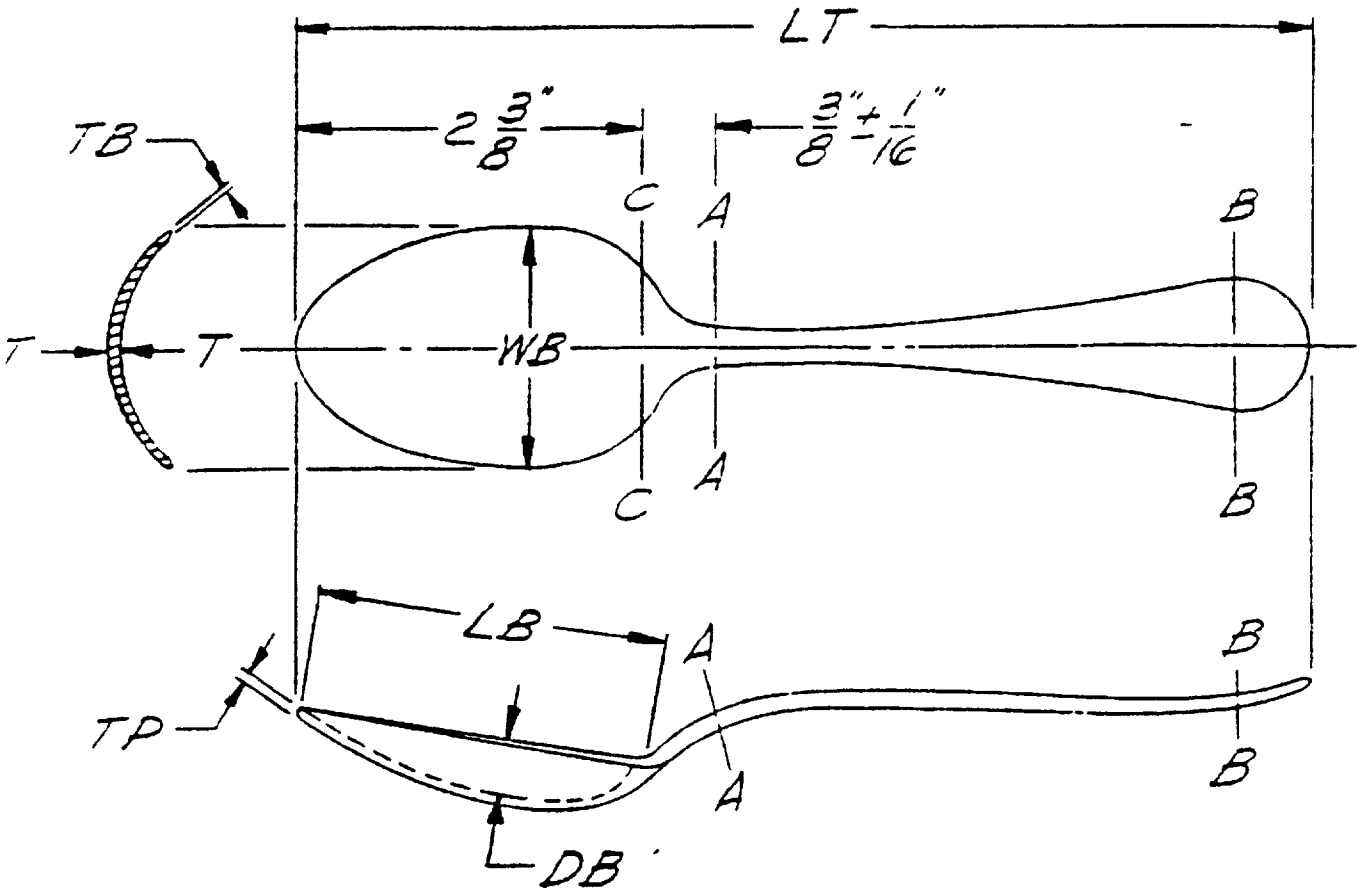


FIGURE 4 - Spoon, dessert, type 1, item III, style 2

TABLE IV - Type 1, item III, style 2, spoon, dessert

Measurements	Dimensions (inches) Minimum	Maximum
Overall length, LT	7-1/16	7-5/16
Bowl length, LB	2-1/4	2-1/2
Width of bowl at widest point, WB	1-1/2	1-19/32
Depth of bowl at deepest point (inside), DB	0.265	0.350
Width at AA	0.215	0.265
Thickness at AA	0.072	0.105
Maximum width of handle, BB	0.740	0.850
Thickness at widest point of handle, BB	0.065	0.105
Edge thickness at WB, TB	0.030	0.065
Edge thickness at bowl point, TP	0.027	0.045
Thickness of bowl bottom at WB, TT	0.033	0.065

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

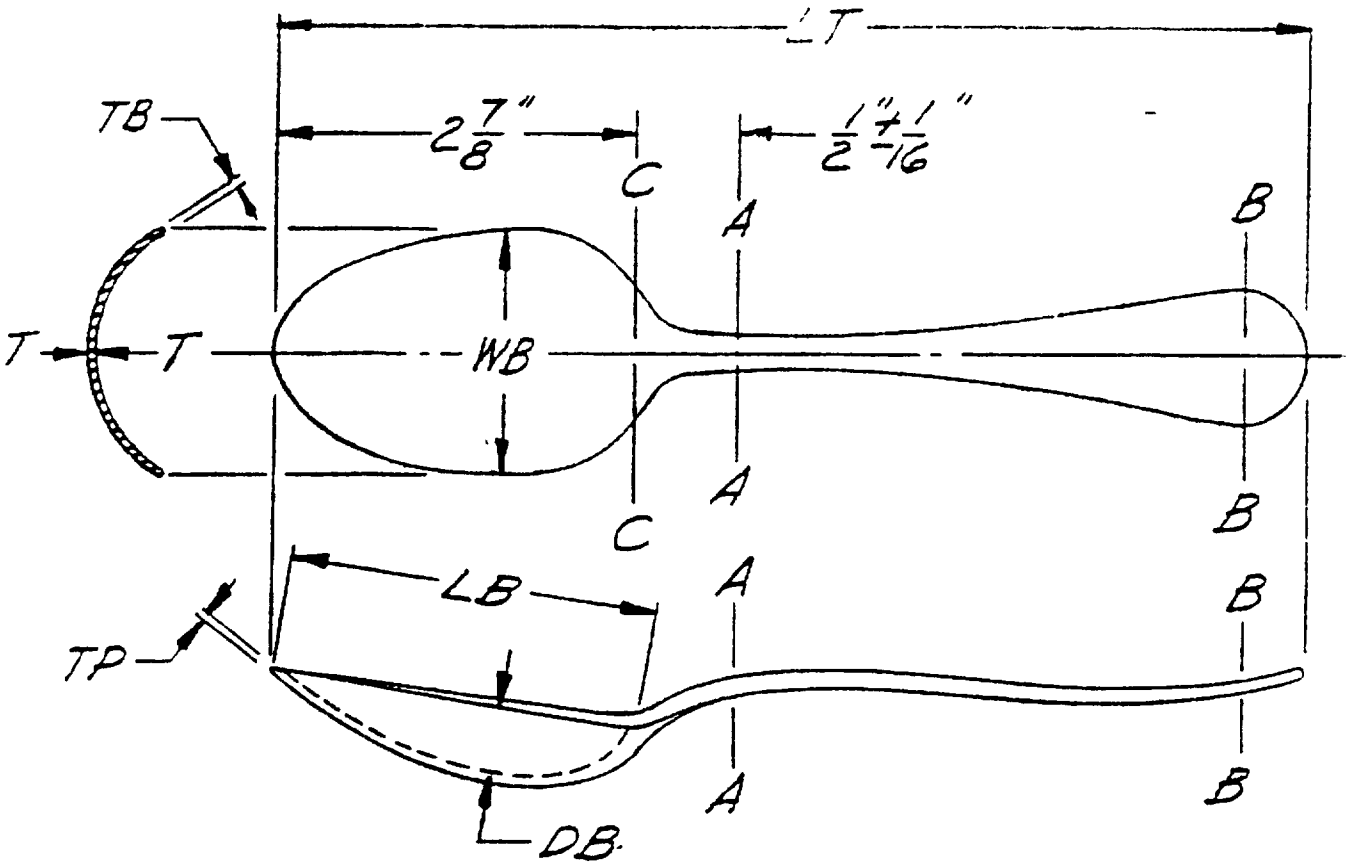


FIGURE 5 - Tablespoon, (large), type 1, item III, style 3

TABLE V - Type 1, item III, style 3, tablespoon (large)

Measurements	Dimensions (inches) Minimum	Maximum
Overall length, LT	8-3/8	8-1/2
Bowl length, LB	2-11/16	2-15/16
Width of bowl at widest point, WB	1-3/4	1-13/16
Depth of bowl at deepest point (inside), DB	0.350	0.420
Width at AA	0.230	0.280
Thickness at AA	0.085	0.125
Maximum width of handle, BB	0.920	0.985
Thickness at widest point of handle, BB	0.075	0.105
Edge thickness at WB, TB	0.030	0.065
Edge thickness at bowl point, TP	0.030	0.055
Thickness of bowl bottom at WB, TT	0.035	0.065

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

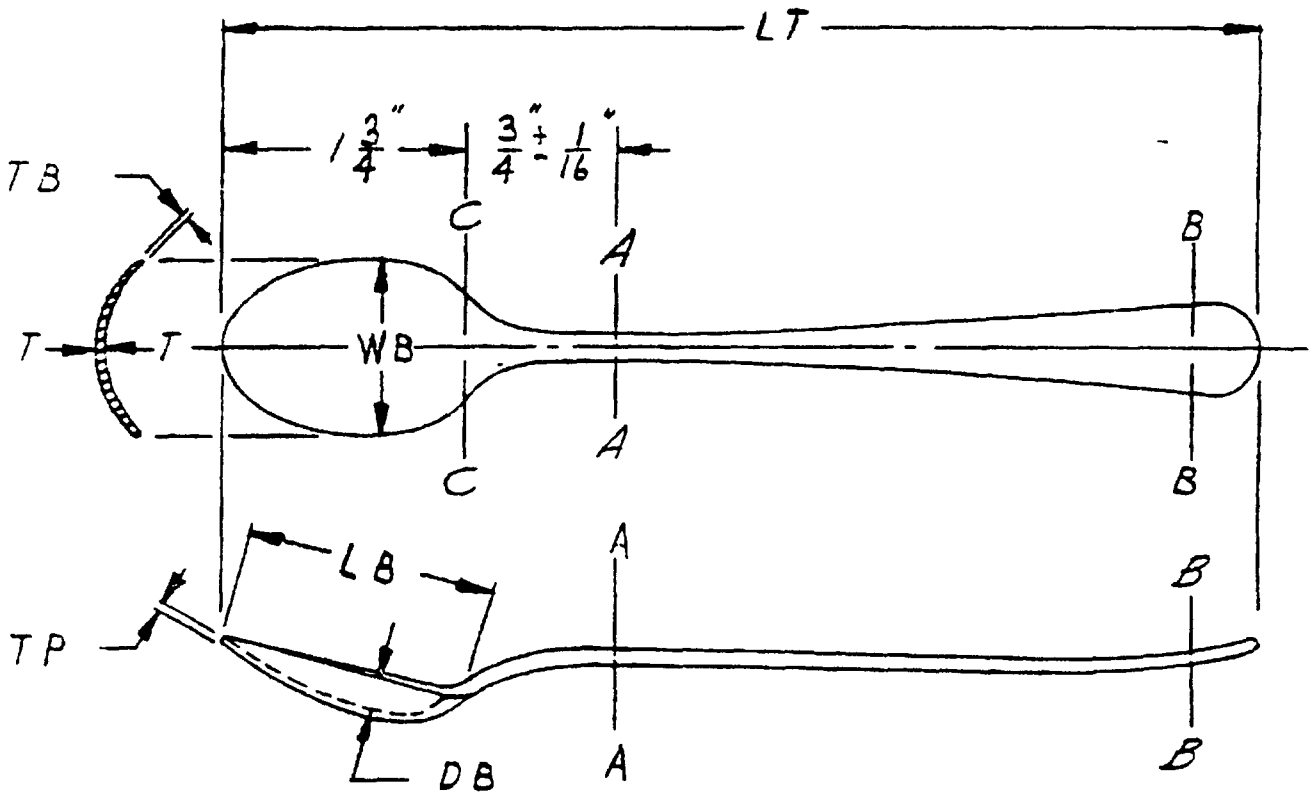


FIGURE 6 - Spoon, iced tea, type 1, item III, style 4

TABLE VI - Type 1, item III, style 4, spoon, iced tea

Measurements	Dimensions (inches) Minimum	Maximum
Overall length, LT	7-9/16	8-1/8
Bowl length, LB	1-3/4	2-1/16
Width of bowl at widest point, WB	1-1/16	1-3/8
Depth of bowl at deepest point (inside), DB	0.195	0.315
Width at AA	0.165	0.235
Thickness at AA	0.065	0.105
Maximum width of handle, BB	0.625	0.750
Thickness at widest point of handle, BB	0.065	0.085
Edge thickness at WB, TB	0.030	0.050
Edge thickness at bowl point, TP	0.028	0.043
Thickness of bowl bottom at WB, TT	0.030	0.050

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

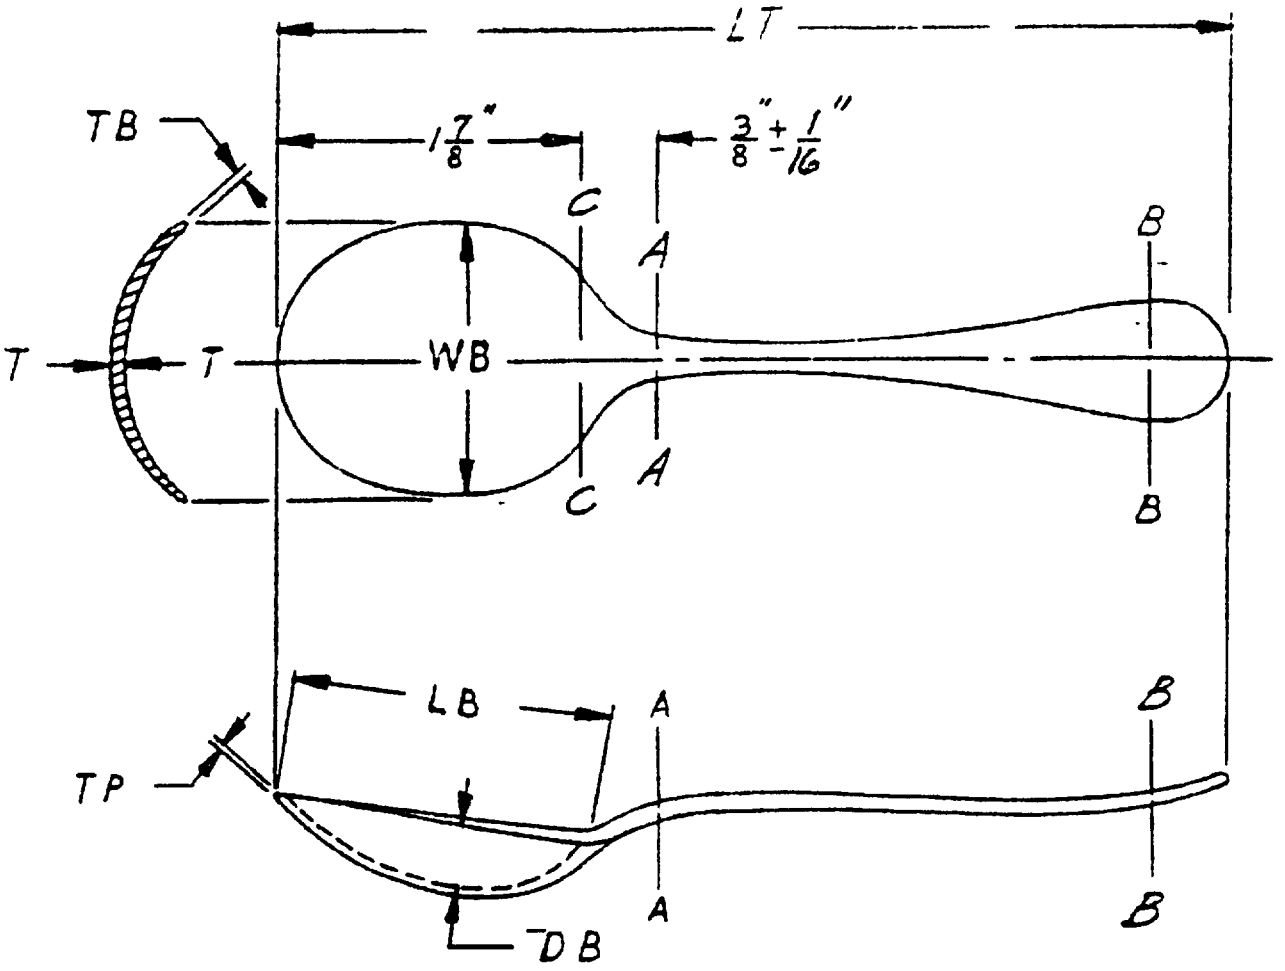


FIGURE 7 - Spoon, bouillon, type 1, item III, style 5

TABLE VII - Type 1, item III, style 5, spoon, bouillon

Measurements	Dimensions (inches) Minimum	Maximum
Overall length, LT	5-11/16	6-1/8
Bowl length, LB	1-13/16	2-1/16
Width of bowl at widest point, WB	1-7/16	1-11/16
Depth of bowl at deepest point (inside), DB	0.260	0.330
Width at AA	0.195	0.250
Thickness at AA	0.065	0.100
Maximum width of handle, BB	0.620	0.710
Thickness at widest point of handle, BB	0.065	0.100
Edge thickness at WB, TB	0.028	0.045
Edge thickness at bowl point, TP	0.025	0.040
Thickness of bowl bottom at WB, TT	0.028	0.045

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

APPENDIX
EQUIVALENT METRIC DIMENSIONS OF TABLES I - VII

TABLE A-I - Type 1, item I, style 2, knife

Measurements	Dimensions Minimum	Maximum
Overall length, LT	21.3 cm	23.0 cm
Handle length, LH	9.5 cm	10.8 cm
Widest blade section, W	17.9 mm	20.0 mm
Width at end of neck radius on handle, BB	12.0 mm	13.7 mm
Thickness at end of neck radius on handle, BB	5.5 mm	7.1 mm
Width of handle at end of radius, CC	14.6 mm	16.8 mm
Thickness of handle at end of radius, CC	4.7 mm	5.5 mm
Blade thickness where radius starts, NN	1.8 mm	2.9 mm
Blade thickness (point), PP	0.6 mm	1.1 mm

TABLE A-II - Type 1, item II, style 1, utility fork

Measurements	Dimensions Minimum	Maximum
Overall length, LT	17.6 cm	18.1 cm
Width at AA (⅛" from tip of tine)	17.8 mm	19.7 mm
Thickness at AA (⅛" from tip of tine)	1.5 mm	2.0 mm
Width at BB (⅛" from base of tine)	22.9 mm	24.1 mm
Thickness at BB (⅛" from base of tine)	1.8 mm	2.4 mm
Width at CC (at narrowest section)	4.8 mm	6.6 mm
Thickness at CC (at narrowest section)	1.8 mm	3.4 mm
Maximum width of handle, DD	18.7 mm	21.8 mm
Thickness at widest point of handle, DD	1.5 mm	2.4 mm
Tine Length, TL	4.4 cm	4.9 cm

TABLE A-III - Type 1, item III, style 1, teaspoon

Measurements	Dimensions Minimum	Maximum
Overall length, LT	15.1 cm	15.4 cm
Bowl length, LB	4.9 cm	5.2 cm
Width of bowl at widest point, WB	3.1 cm	3.3 cm
Depth of bowl at deepest point (inside), DB	5.7 mm	7.0 mm
Width of section AA	4.8 mm	6.0 mm
Thickness at section AA	1.8 mm	2.5 mm
Maximum width of handle, BB	17.4 mm	19.0 mm
Thickness at widest point of handle, BB	1.7 mm	2.2 mm
Edge thickness at WB, TB	0.8 mm	1.3 mm
Edge thickness at bowl point, TP	0.6 mm	1.1 mm
Thickness of bowl bottom at WB, TT	0.9 mm	1.3 mm

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

TABLE A-IV - Type 1, item III, style 2, spoon, dessert

Measurements	Dimensions Minimum	Maximum
Overall length, LT	17.9 cm	18.6 cm
Bowl length, LB	5.7 cm	6.4 cm
Width of bowl at widest point, WB	3.8 cm	4.1 cm
Depth of bowl at deepest point (inside), DB	6.7 mm	8.9 mm
Width at AA	5.5 mm	6.7 mm
Thickness at AA	1.8 mm	2.7 mm
Maximum width of handle, BB	18.8 mm	21.6 mm
Thickness at widest point of handle, BB	1.7 mm	2.7 mm
Edge thickness at WB, TB	0.7 mm	1.7 mm
Edge thickness at bowl point, TP	0.7 mm	1.1 mm
Thickness of bowl bottom at WB, TT	0.8 mm	1.7 mm

TABLE A-V - Type 1, item III, style 3, tablespoon (large)

Measurements	Dimensions Minimum	Maximum
Overall length, LT	21.3 cm	21.6 cm
Bowl length, LB	6.8 cm	7.5 cm
Width of bowl at widest point, WB	4.4 cm	4.6 cm
Depth of bowl at deepest point (inside), DB	8.9 mm	10.7 mm
Width at AA	5.8 mm	7.1 mm
Thickness at AA	2.2 mm	3.2 mm
Maximum width of handle, BB	23.4 mm	25.0 mm
Thickness at widest point of handle, BB	1.9 mm	2.7 mm
Edge thickness at WB, TB	0.8 mm	1.7 mm
Edge thickness at bowl point, TP	0.8 mm	1.4 mm
Thickness of bowl bottom at WB, TT	0.9 mm	1.7 mm

TABLE A-VI - Type 1, item III, style 4, spoon, iced tea

Measurements	Dimensions Minimum	Maximum
Overall length, LT	19.2 cm	20.6 cm
Bowl length, LB	4.4 cm	5.2 cm
Width of bowl at widest point, WB	2.7 cm	3.9 cm
Depth of bowl at deepest point (inside), DB	5.0 mm	8.0 mm
Width at AA	4.2 mm	6.0 mm
Thickness at AA	1.7 mm	2.7 mm
Maximum width of handle, BB	15.9 mm	19.0 mm
Thickness at widest point of handle, BB	1.7 mm	2.2 mm
Edge thickness at WB, TB	0.8 mm	1.3 mm
Edge thickness at bowl point, TP	0.7 mm	1.1 mm
Thickness of bowl bottom at WB, TT	0.8 mm	1.3 mm

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

TABLE A-VII - Type 1, item III, style 5, spoon, bouillon

Measurements	Dimensions	
	Minimum	Maximum
Overall length, LT	14.5 cm	15.6 cm
Bowl length, LB	4.6 cm	5.2 cm
Width of bowl at widest point, WB	3.7 cm	4.3 cm
Depth of bowl at deepest point (inside), DB	6.6 mm	8.4 mm
Width at AA	5.0 mm	6.4 mm
Thickness at AA	1.7 mm	2.5 mm
Maximum width of handle, BB	15.7 mm	18.0 mm
Thickness at widest point of handle, BB	1.7 mm	2.5 mm
Edge thickness at WB, TB	0.7 mm	1.1 mm
Edge thickness at bowl point, TP	0.6 mm	1.0 mm
Thickness of bowl bottom at WB, TT	0.7 mm	1.1 mm

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.