INCH-POUND

A-A-55182A
September 11, 2026
SUPERSEDING
A-A-55182
April 26, 1993

COMMERCIAL ITEM DESCRIPTION

COVER, PERSONNEL IDENTIFICATION TAG

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement of MIL-C-14635 for all federal agencies.

1. SCOPE. This CID covers the requirements for a plastic cover sized to fit over the standard personnel identification tag. The cover can be irreversibly marked with the individual's spectacle prescription.

2. CLASSIFICATION. The cover shall be of one (1) type and size.

3. SALIENT CHARACTERISTICS.

3.1 Description. The tag cover's finished dimensions shall be 2-5/16 inches by 1-11/32 inches by 1/32-inch thick (see Figures 1 and 2). It shall be curved at the opposite ends to a radius of 7/8-inches, measurements taken on the horizontal center line starting 9/32-inches to the left and 9/32-inches to the right of center. A 9/16-inch diameter hole shall be made 5/16-inches from the opening slot on the horizontal center line and additional holes are permitted, shall not exceed a total of three (3). The marking shall be in accordance with the details and dimensions in Figures 1 and 2. All lettering on the (back and front) faces of the bottom half of the cover shall be raised 0.010-inch and shall be legible in the end product. The finished cover shall be capable of being irreversibly marked with a standard government ball point pen using heavy pressure.

3.1.1 Figures. Figures 1 and 2 are furnished for informational purposes only. To the extent of any inconsistencies between the written document and the figure, the written document shall govern.

3.2.1 Basic material. The tag cover shall be made from a plasticized polyvinyl chloride composition, and it shall be non-toxic and non-allergenic. The material (after curing) shall be soft flexible elastomeric plastic (see 3.3).

Beneficial comments, recommendations, additions, deletions, clarifications and any other data that may improve this document should be sent to trpsptctstandardiz@dla.mil.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

3.2 Materials.

3.2.2 Color. The color shall be as specified in the contract or purchase order.

3.3 Requirements. The finished tag cover shall conform to the physical requirements specified in Table I when tested in accordance with the test methods in Table I.

TABLE I. Physical requirements.

Characteristic	Requirement	Test Method
Extent of burning test	1/	ASTM D6413/D6413M 2/
Tensile strength at break, psi (min.)	2300	ASTM D412
Ultimate elongation, percent (min.)	335	ASTM D412
Tensile stress at 100 percent elongation, psi (min.)	725	ASTM D412
Tear resistance, pounds per inch thickness (min.)	225	ASTM D624 3/

1/ The test specimen shall be considered to be "self-extinguishing" if the flame immediately self-extinguishes (defined as an after-flame time of "one (1) second (maximum)" and no melt drip is observed. Any melt drip shall constitute failure of the test specimen. The sample shall be considered passing if all test specimens self-extinguish. If not more than one (1) test specimen of the 10 test specimens fails, an additional 10 specimens shall be tested. If one (1) or more of these test specimens fail, then the sample shall be considered failing.

2/ The test method shall be performed with the following exceptions:

a. The test specimen shall be a 1-inch wide by 18-inches long by 0.025-inch-thick strip of the plastic film of the same production lot used for the personnel ID tag cover. The 10 test specimens shall be tested from each sample.

b. The test specimen shall be clamped at the top end and hang vertically in the test chamber. The flame of the Bunsen burner shall be 1-inch in total height. Apply the tip of the flame of the Bunsen burner to the bottom end of the test specimen for not less than 2 seconds, but no longer than 12 seconds, until the test specimen is ignited. When the specimen is observed to ignite, the Bunsen burner flame shall be immediately removed, and the after-flame time of the burning test specimen shall be measured from the time the Bunsen burner flame is removed to the time the flame of the burning test specimen self-extinguishes. The characteristic of after flame shall be measured in units of "seconds" and the occurrence of any melt drip shall be observed and recorded. In order to conduct the test of individual specimens, the test cabinet door may be left open moderately to allow the Bunsen burner to be physically moved during the test, and all extraneous air currents shall be minimized during the test period.

3/ Die C specimens shall be used.

3.4 Toxicity. Unless otherwise specified in the contract or procurement documents, the finished cover shall not present a health hazard and shall show compatibility with prolonged, direct skin contact when tested as specified in 3.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

3.4.1 Toxicity test. When the toxicity requirement (see 3.4) can be demonstrated with historical use data, on the finishing treatments used, toxicity testing may not be required (see 7.1.4 and 7.4).

3.5 Workmanship. The finished cover shall conform to the quality of the product established in this document. The cover shall be free from defects which would affect its serviceability, appearance, uniformity and quality assurance standards defined by the technical data in the procurement documents.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation (FAR), or the sustainable acquisition of EO 13834; as applicable. (See 7.1.2 and 7.1.3).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The cover shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptability. The finished cover offered must have been sold to the government or commercial market.

5.3 End item inspection procedures. Sampling for inspection shall be conducted in accordance with ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection of Attributes (see 7.2.1).

5.4 Visual examination. Each finished cover shall be examined for the defects listed in Table II. The lot size shall be expressed in units of covers. The sample unit shall be one (1) cover.

TABLE II. Visual examination defects.

Material defects: Any hole, cut, tear, any spot or stain on outside, discoloration or color not as specified. Cover design not in accordance with specified requirement; finish oily or dirty, brittle, crack, or other imperfections in finish, any rough surface or irregularity which may cause injury or discomfort to wearer; surface not smooth, malformed, bent, or otherwise damaged; any defect which renders cover unsuitable for use; not made of specified material or objectionable odor.
Workmanship: Any component part omitted, twisted, not specified size, missing, misplaced, or distorted parts; poorly shaped, any dimension of item not as specified or within tolerances; design not as specified. Failure to meet product conformance; serviceability, reliability and quality of materials as defined by this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

TABLE II. Visual examination defects. – Continued

Packaging: Not packaged in accordance with the contract or procurement documents.

5.5 Dimensional examination. The finished cover shall conform to the dimensions specified in Figures 1 and 2 when measured as stated. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one (1) cover.

5.6 Marking examination. The finished cover shall conform to the marking requirements specified in Figures 1 and 2 and as stated in 3.1. The lot size shall be expressed in units of covers. The sample unit shall be one (1) cover. Any test failure shall be cause for rejection of the lot.

5.7 Acceptance criteria. Acceptance criteria shall be as specified in the contract or procurement documents (see 7.5).

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or purchase order (see 7.5).

7. NOTES

7.1 Source of Government documents.

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

7.1.2 Federal Acquisition Regulations (FAR) are available online at https://acquisition.gov.

7.1.3 EPA information is available online at https://www.epa.gov and EO 13834 information is available online at https://www.fedcenter.gov/.

7.1.4 Toxicity testing. If dermal toxicity testing is required, it will be conducted in accordance with Title 40, Protection of Environment, Code of Federal Regulations current edition and applicable sections, which are also consistent with the following OECD tests:
Skin Sensitization 406 and Dermal Irritation 404 (https://www.oecd-ilibrary.org/environment/oecd-guidelines-for-the-testing-of-chemicals-section-4-health-effects_20745788?page=1).

Dermal Sensitization (https://www.law.cornell.edu/cfr/text/40/798.4100).

Dermal Toxicity (https://www.law.cornell.edu/cfr/text/40/798.2250).

7.2 Source of non-Government documents.

7.2.1 ASQ/ANSI Z1.4 – Sampling Procedures are available online at https://asq.org.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

7.2.2 ASTM Standards are available for purchase online at https://www.astm.org.

7.3 Intended use. The tag cover is intended to be fitted over one standard identification tag and irreversibly marked with the individual's spectacle prescription.

7.4 Certificate of compliance. The contracting activity may select to accept a certificate of compliance for a stated requirement.

7.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to previous issues due to the extensiveness of the changes.

7.6 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this CID.
b. Color required (see 3.2.2).
d. When toxicity testing is required (see 3.4).
e. Product conformance (see 5.1).
f. Acceptance criteria (see 5.7).
g. Packaging requirements (see 6.).

7.7 National Stock Number (NSN). The following is the NSN assigned that corresponds to this CID.

NSN 8465-00-999-7905

7.8 Key words.

Dog tags
Eye glasses
Prescription
Spectacles

THIS SPACE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

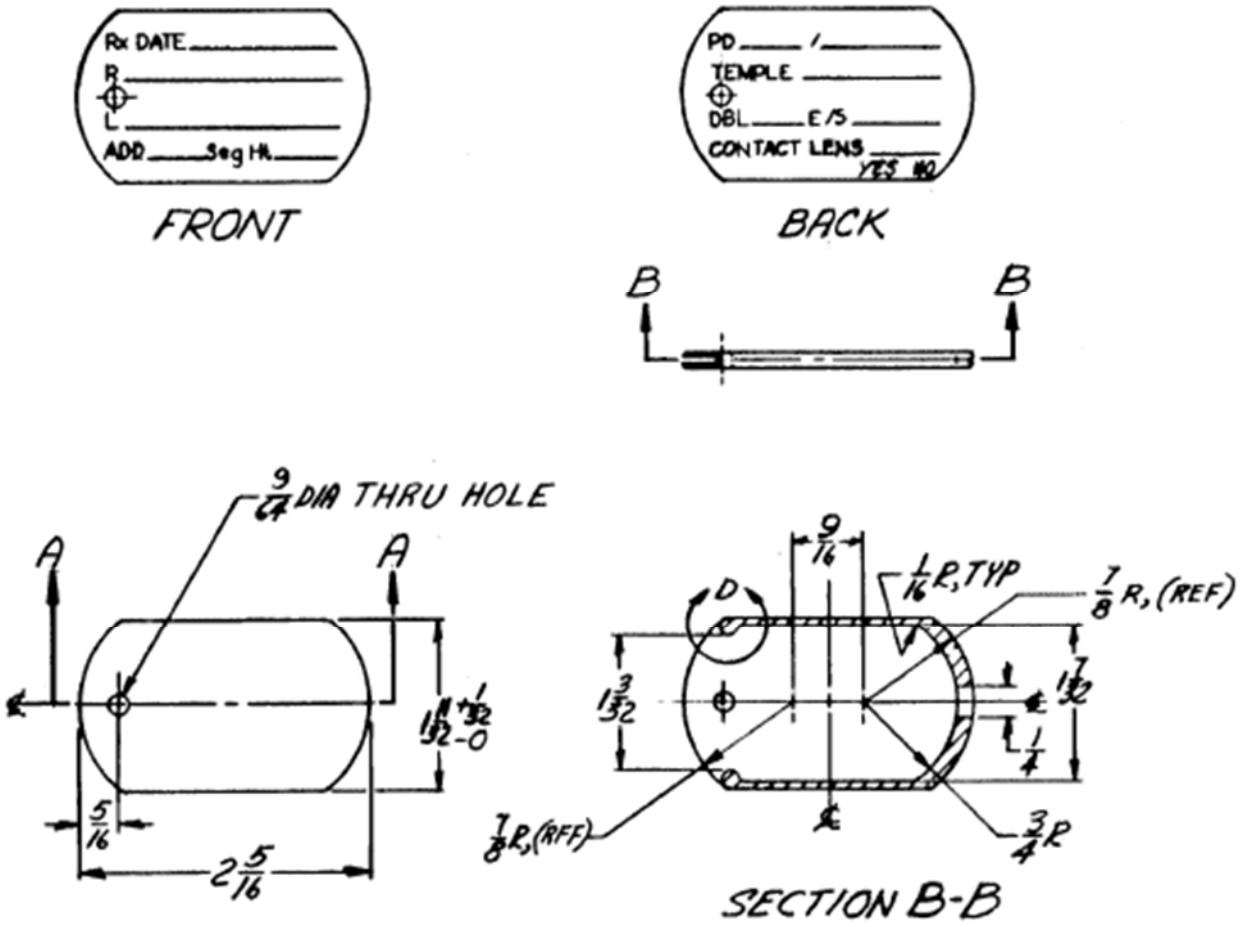


FIGURE 1. Personnel, tag cover, front and back view, dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

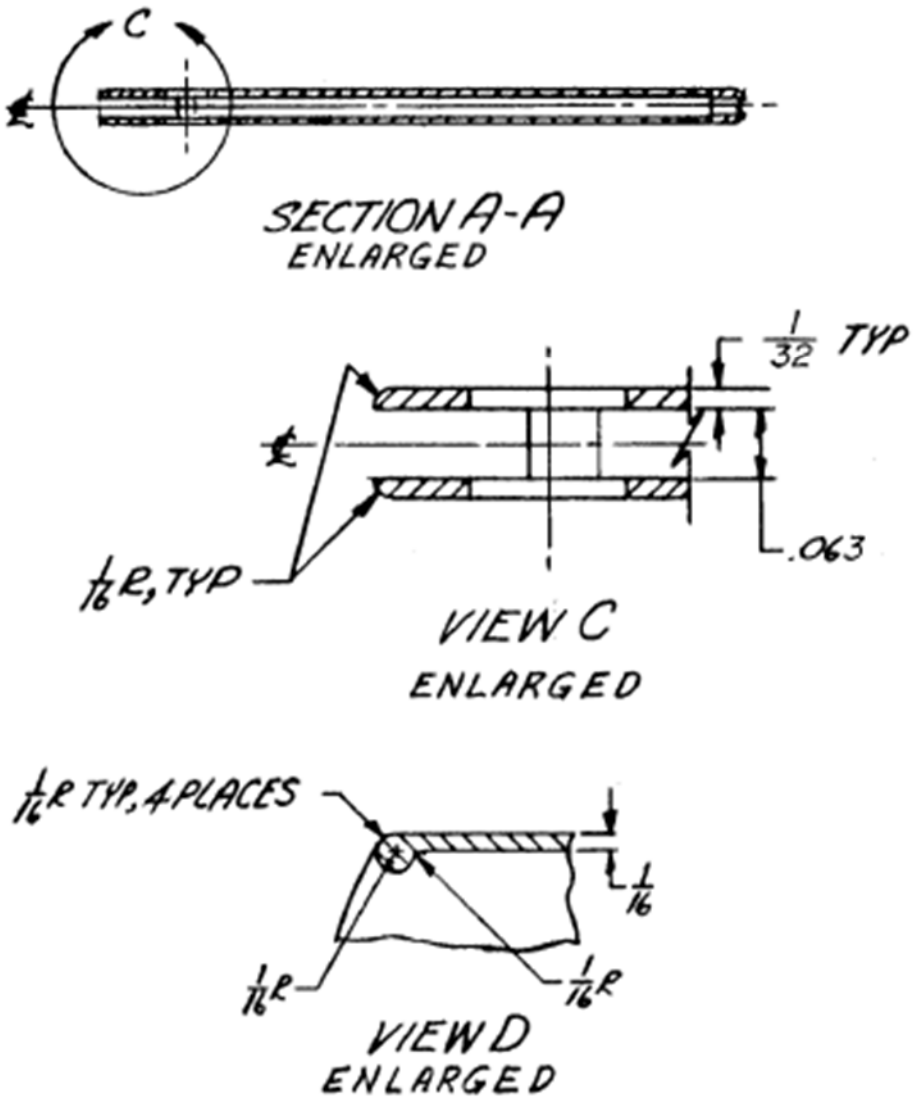


FIGURE 2. Personnel, tag cover, cross section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - GL
Navy - NU
Air Force - 11

Reviewers:
Navy - CG, MC

CIVIL AGENCY COORDINATING ACTVITY:
GSA-FAS

Preparing Activity
DLA-CT

(Project 8465-2026-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.