INCH-POUND

A-A-55205
May 18, 1993

COMMERCIAL ITEM DESCRIPTION

BAG, PERSONAL EFFECTS

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-B-3759.

Abstract. This document covers a cotton sheeting cloth bag 7 inches in diameter and 8 inches in depth with a drawstring closure at the top. The bag is used to store delivery mail and personal effects, such as wallet, watch, ring and other valuables pending inventory and return to the next of kin of deceased military personnel.

Salient Characteristics. The construction of the bag shall conform to Figure 1 and shall be as specified herein.

Materials.

Cloth, Sheeting, Cotton. The cotton cloth shall be unbleached with a plain weave. The cloth shall be vat dyed, water-repellent and mildew resistant aftertreated, shade Camouflage Green CG-483. The water repellents shall consist of aluminum salts of saturated carboxylic acids (such as formate, acetate, palmitate or stearate), zirconium salts of such saturated carboxylic acids, or a combination of both, mixed with refined mineral and vegetable waxes, titanate esters, or a combination of both. The product shall be applied either in the form of an aqueous emulsion or in the form of a water free solvent solution. The mildew compound

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

applied shall be copper 8-quinolinolate in solubilized form. The cloth shall conform to the requirements in Table I below.

Table I. Cloth Requirements

Characteristic	Requirement	Test Method
Yarns per inch Warp Fill	 46 min. 40 min.	 ASTM D3775-85 1/ ASTM D3775-85 1/
Weight	4.3 oz./sq. yd. min.	ASTM D3776-85 Option C
Breaking strength Warp Fill	 50 lbs. min. 34 lbs. min.	 ASTM D5034-90 2/ ASTM D5034-90 2/
Nonfibrous materials content	4.0% max.	FED-STD-191 2611
Copper & manganese content	.003% copper max. .0015% manganese max.	FED-STD-191 2053
pH	5.5 - 8.5	ASTM D2165-90
Labile sulfur	No more than slight trace	FED-STD-191 2020
Crocking	"good"	AATCC 8-1988
Spray rating	80, 80, 70 min.	AATCC 22-1985
Inhibitor content copper 8-quinolinolate	0.18 to 0.27% as copper	FED-STD-191 2050 or 2060 3/

1/ Testing shall be performed after specimen reaches equilibrium under standard conditions of $70^{\circ}\pm2^{\circ}$F and 65±2% relative humidity.
2/ One edge of the long dimension of the specimen shall be raveled until a continuous yarn, the length of the specimen, is obtained. Measure 1-1/2 inches in from this edge and draw a thin line the full length of the specimen.
3/ The supplier shall certify that the specific inhibitor was used in the treatment of the cloth.

Tape, Textile, Cotton (drawstrings). The cotton tape shall be 1/4 inch in width, plain weave. The tape shall be water repellent, mildew resistant and dyed shade Olive Drab-7. The water repellents shall consist of aluminum salts of saturated carboxylic acids (such as formate, acetate, palmitate or stearate), zirconium salts of such saturated carboxylic acids, or a combination of both, mixed with refined mineral and vegetable waxes, titanate esters, or a combination of both. The product shall be applied either in the form of an aqueous emulsion or in the form of a water free solvent solution. The mildew compound applied shall be copper 8-quinolinolate in solubilized form. The tape shall conform to the requirements in Table II below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Table II. Tape Requirements

Characteristic	Requirement	Test Method
Total warp yarns	17 min.	ASTM D3775-85 1/
Filling yarns per inch	28 min.	ASTM D3775-85 1/
Breaking strength (warp)	18 lbs. min.	FED-STD-191 4108 2/
Nonfibrous materials content	10.0% max.	FED-STD-191 2611
pH	5.5 - 8.5	ASTM D2165-90
Labile sulfur	No more than slight trace	FED-STD-191 2020
Dynamic absorption	40% max.	FED-STD-191 4500
Inhibitor content copper 8-quinolinolate	0.13 to 0.40% as copper	FED-STD-191 2050 or 2060 3/

1/ Testing shall be performed after specimen reaches equilibrium under standard conditions of $70^{o}\pm2^{o}$F and 65±2% relative humidity.
2/ Either split drum or flat surface clamps may be used. When flat surface clamps are used, the pulling clamp shall have a uniform speed of 12 ± 0.5 inches per minute, the distance between jaws shall be 3 inches and the test specimen shall be a minimum of 6 inches.
3/ The supplier shall certify that the specific inhibitor was used in the treatment of the tape.

Thread. Thread can be either polyester or nylon with soft or bonded nonwicking finish, meeting a 4.3 pound (minimum) breaking strength when tested in accordance with method 4100 of FED-STD-191. The thread shall be dyed Olive Drab S-1 (C.A. 66022) and shall show fastness to chlorine bleaching equal to or better than the standard shade sample. If no standard shade sample is available, the thread shall show good fastness to chlorine bleaching.

Grommet, Metallic. The plain grommets with toothed washers shall conform to type II, class 3, size No. 0 of MIL-G-16491.

Label/marking. The statistics label, 5 inches long by 4 inches wide, shall be nonwoven, spunbonded polyester cloth or nonwoven, 80/20 polyester/cellulose cloth, and shall be stitched to the bag in the location shown in Figure 1. The impregnation coating shall be a pigmented acrylic or nitrocellulose coating composed of white pigments such as clay, chalk, titanium dioxide, or blane fixe, and affixed by an appropriate acrylic or nitrocellulose resin. The coating composition shall not contain leachable skin irritants or toxic materials. Substances that will support mildew growth shall not be included. The finished impregnated labels shall have a smooth matte surface and shall be free from objectionable odors. Labels shall be clearly legible after

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

subjection to the accelerated laundering procedure specified in AATCC No. 61 Test IVA. Marking on the label shall be printed in 10-point size characters and shall be as follows:

Deceased Military Personnel, Personal Effects

Serial No.———————————

Grade——————————— Name———————————

Organization——————————— Rank———————————

Address———————————

Nearest relative———————————

Address———————————

Killed in action——————— Died of disease———————

Date——————————— Hospital———————————

Battle area——————————— Information———————————

——————————————— ———————————————

Place of burial———————————

Point of coordination———————

Description of body———————————————————————————

———————————————————————————————————————

Members missing———————————————————————————

———————————————————————————————————————

Signed———————————

Sizes and Measurements. The finished bag shall conform to the measurements in Figure 1.

Workmanship. After completion, the finished bag shall be thoroughly cleaned, and all loose thread, lint, and foreign matter removed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Examination. Bag lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The bags shall be examined for the defects listed below. The lot size shall be expressed in units of bags. The sample unit is one bag. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 6.5.

Defects. The bags shall be examined for the following defects: any hole, cut, tear in the cloth, color not as specified; any spot or stain (outside); thread ends not removed; broken or missing yarn, multiple floats clearly visible at normal inspection distance (approximately 3 feet); shade bar; fine or coarse filling bar; edge of tape (drawstrings) frayed or scalloped; grommets broken; malformed grommets; grommets fail to perform intended function; corroded area on grommets; burr or sharp edge which may cause injury in handling or damage to fabric; open seams; raw edges; thread breaks; chain portion of

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T09:44Z
Check the source to verify that this is the current version before use.

stitching indicated by "Z" on Figure 1 shows on outside of bag; any component part not fabricated of applicable referenced material; hems formed on outside of bag in lieu of inside; seams badly pleated or puckered; one or both drawstrings caught in hem stitching failing to allow complete closing of bag; drawstring loops not threaded through grommets; bartacks omitted on either side of seam; bartacks loose or tight, incomplete or broken; body of bag formed with more than 2 pieces of fabric; ends of seam joining bottom halves staggered at seams joining bottom to body by more than 3/8 inch; label missing, incorrect, illegible, misplaced, or characters not as specified; grease or oil stains clearly noticeable; grommets set off-center of hem by more than 1/4 inch; grommets set off-center of closing seam by 1/8 inch or more; width of hem less than specified by more than 1/4 inch; bartacks set beyond location indicated on Figure 1 by more than 1/4 inch; overall dimensions not within tolerances specified on Figure 1 (NOTE: The diameter of the finished bottom shall be taken from the bottom edge of body across bottom sections); not cut or fabricated in accordance with the product demonstration model; label missing, incorrect, or illegible; measurement of item not as specified; any variance not otherwise classified herein but at a variance with the product demonstration model.

Dimensional Examination. The finished bag shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one bag; the inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL, expressed in terms of defects per hundred units, shall be 2.5.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT
Content	Number of items in container is more or less than required
	NSN shown on one or more items not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

PACKAGING.

Packaging. Ten bags shall be stacked in a bundle with labels facing up and secured with tape or twine.

Packing. Six hundred bags shall be placed in a fiberboard box conforming to RSC-L, grade 275 of PPP-B-636. The box shall be closed in accordance with the appendix of PPP-B-636.

Palletization. Boxes shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

Marking. Marking shall be in accordance with MIL-STD-129.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

AATCC Test Methods

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, N.C. 27709.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

ASTM Test methods

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Custodian:
Army - GL
Navy - NU

User Activity:
Navy - MC

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8465-0130

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

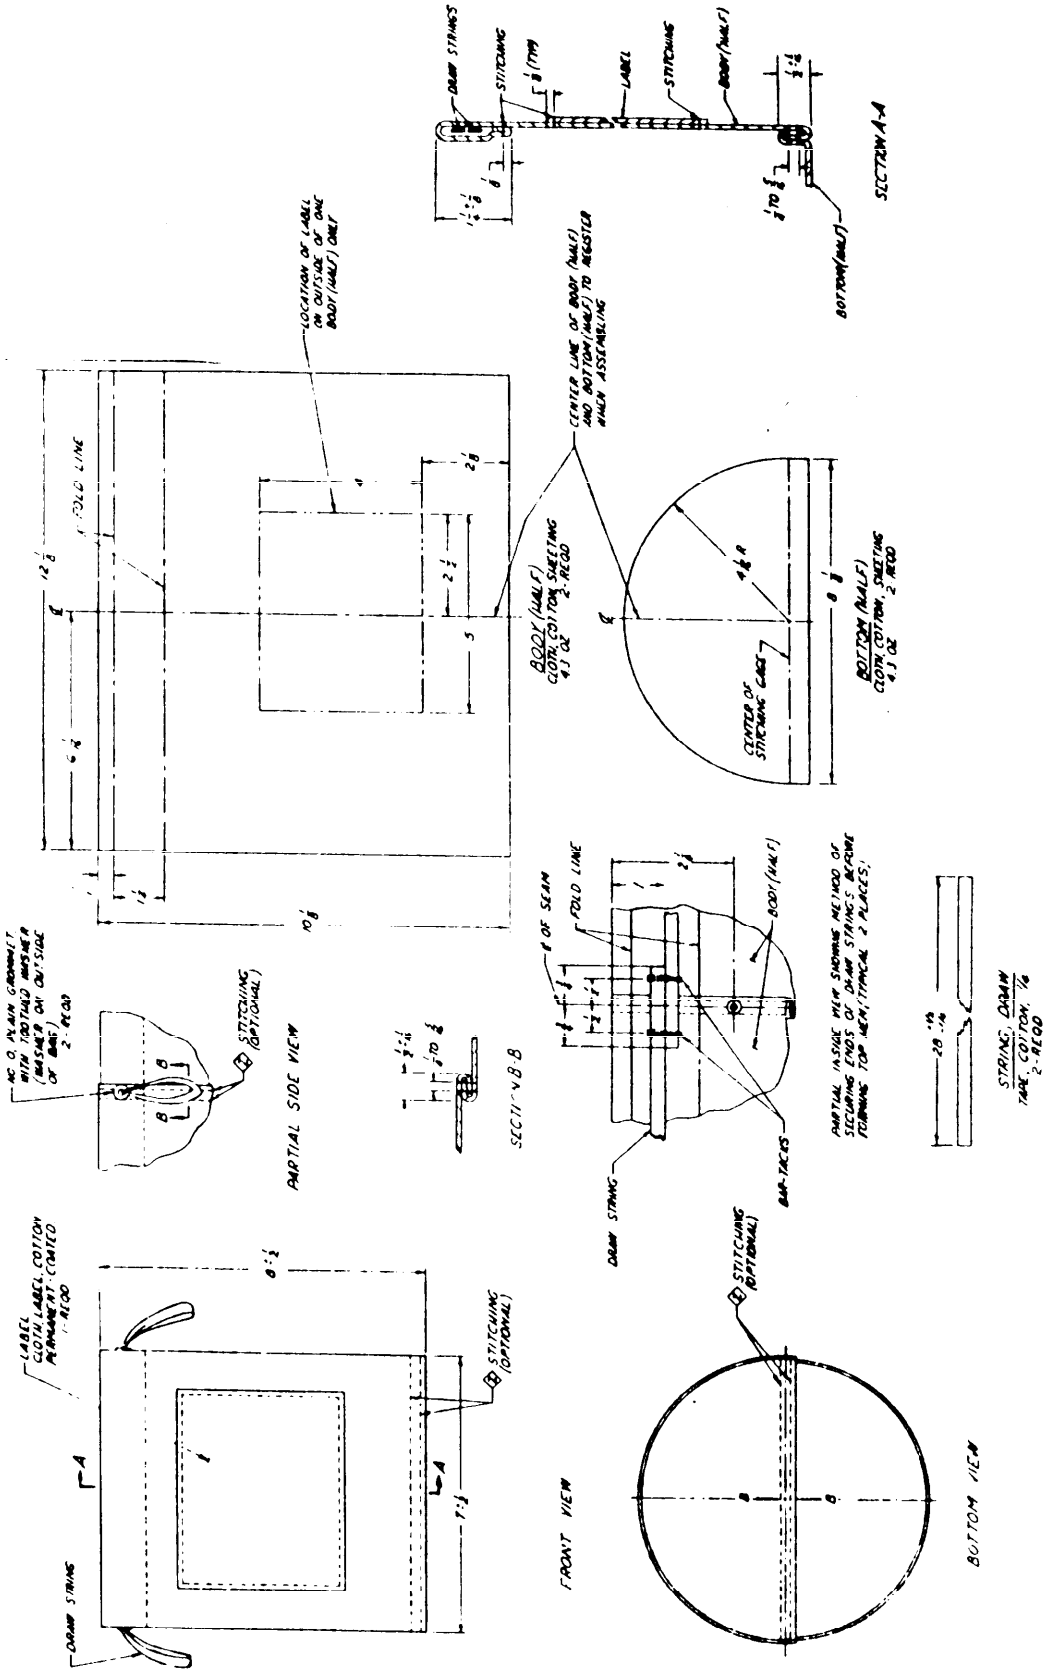


Figure 1. Bag, Personal Effects

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:44Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-55205	2. DOCUMENT DATE (YYMMDD) 93-05-18

3. DOCUMENT TITLE
BAG, PERSONAL EFFECTS

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	b. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.