H-B-00185a (DSA-DM)
July 13, 1970
Interim revision of
Fed. Spec. H-B-185
November 1, 1960

INTERIM FEDERAL SPECIFICATION

BRUSH, DENTURE, CLEANING

This Interim Federal Specification was developed by the Defense Personnel Support Center, 2800 South 20th Street, Philadelphia, Pa., 19101 based upon currently available technical information. It is recommended that Federal Agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above. The General Services Administration has authorized Federal Agencies to use this Interim Federal Specification as a valid exception to Federal Specification H-B-185.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers brushes suitable for use in cleaning dentures.

1.2 Classification. Brushes shall be of the following types as specified (see 6.1).

Type 1. Straight trim
Type 2. Tufted end.

FSC 6520

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issue in effect on the date of invitations for bid or requests for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

H-S-951	Synthetic Filament, General Specifications for Brush.
MMM-A-250	Adhesive, Water-Resistant, (For Sealing Fiberboard Boxes).
PPP-B-566	Boxes, Folding, Paperboard.
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.
PPP-B-676	Box, Setup.
PPP-T-76	Tape, Pressure-Sensitive Adhesive Paper, (For Carton Sealing).

STANDARD

Federal

FED-STD-123	Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston; New York; Atlanta; Chicago; Kansas City, Mo.; Fort Worth; Denver; San Francisco; Auburn, Washington; and Washington, D. C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

(Federal Government activities may obtain copies of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

STANDARDS

Military

MIL-STD-105 Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 Marking for Shipment and Storage.

(Copies of Military specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS.

3.1 Material.

3.1.1 Block. The block shall be fabricated of a colorless, transparent, rigid methacrylate plastic.

3.1.2 Staples. Staples shall be fabricated of corrosion-resisting wire or wire which has been made corrosion resisting by suitable plating. The wire shall be 0.022 to 0.025 inches in diameter and shall not show evidence of corrosion, when tested as specified in 4.4.1.

3.1.3 Synthetic filament. Synthetic filaments shall be black in color and shall be fabricated from a long-chain synthetic polymeric amide, conforming to class N, type II of H-S-951, except that the diameter shall be 0.012 ± 0.001 inch, and the bundle diameter shall not apply.

3.2 Style, design, and dimensions. The style, design, and dimensions of types I and II denture cleaning brushes shall conform to Figure 1, as applicable. The brushes shall be suitable for cleaning dentures.

3.3 Construction. The block shall be solid, straight, and of one-piece construction with rounded corners and edges. The distal end of the block shall have evenly spaced holes to receive the filaments, while the proximal end shall serve as a handle. The block shall have a hole no less than 1/8 inch in diameter at the proximal end by which to hang the brush. The filaments shall be securely and permanently clenched, and fastened by staples around the middle of each tuft. The filaments shall completely fill the holes. The filaments shall be neatly and evenly trimmed, and the filament ends square cut.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

3.4 Finish. The block shall be smoothly finished.

3.5 Identification marking. Each brush shall be permanently and legibly marked with the name or registered trademark of the manufacturer.

3.6 Workmanship. Workmanship shall be first class throughout. The brushes shall be free from defects which either detract from their appearance or may impair their serviceability, proper functioning, or intended use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties).

4.1.2 Certificates of quality. Certificates of quality, supplied by the manufacturer of the filaments, the block, and the staple wire, may be furnished in lieu of actual performance of such testing by the contractor, provided that lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the name of the material, the lot number, individual test results, and the specification requirements.

4.2 Quality conformance inspection. The examinations and tests required to assure conformance of those items or lots of items to be offered are classified as specified in tables I and III (see 4.2.1 and 4.3) and table II (see 4.2.2).

4.2.1 Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105. The inspection levels and acceptable quality levels (AQL's) shall be as indicated in table I. Unit of product for examination purposes shall be one brush.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

Table I. Examination Criteria

Type defect	Inspection level	AQL (percent defective)
Major A	II	1.0
Major B	S-2	1.5
Minor A	[illegible]	2.5
Minor B	S-2	4.0

4.2.2 Sampling for tests. Sampling for tests shall be conducted in accordance with MIL-STD-105, and as indicated in table II, except that the acceptance number shall be zero for all sample sizes.

Table II. Test Criteria

Characteristic	Requirement	Test procedure	Unit of product	Inspection level
Corrosion resistance	3.1.2	4.4.1	5-inch (min) piece staple wire	S-2

4.3 Examination. The brushes shall be examined to determine compliance with the requirements contained in this specification. Examination shall be conducted as specified in 4.2.1. Any brush in the sample containing one or more defects shall be rejected, and if the number of defective brushes in any sample exceeds the acceptance number for that sample, the lot represented by that sample shall be rejected. The brushes shall be examined for defects including, but not limited to, those listed in table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

Table III. Classification of defects

Category	Defect
Major A	
101	Type of brush not as specified.
102	Style and design of brush not as shown in applicable figure.
103	Filaments not square cut.
104	Filaments do not completely fill each drill hole.
105	Tufts not securely fastened.
106	Blocks have sharp corners or sharp edges.
107	Blocks misshapen, cracked, or split.
Major B	
151	Drill size of holes not as specified.
152	Minimum number of holes in block not as specified.
153	Minimum length of filaments outside of block not as specified.
154	Filament diameter not as specified.
Minor A	
201	Block and filaments not specified colors.
202	Filaments not evenly trimmed according to specified type.
203	Filaments crimped or tapered.
204	Hang up hole missing.
205	Block not finished smooth.
206	Filament holes not evenly spaced as shown in figure.
207	Identification marking not as specified.
208	Packaging and packing not as specified.
209	Marking on packaging and pack not as specified.
Minor B	
251	Dimensions (other than 151, 152, 153, and 154) not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

4.4 Test procedure.

4.4.1 Corrosion resistance. Prior to cutting into staples, wire specimens, at least 5-inches long, shall be placed in a 10 percent (by weight) aqueous solution of sodium chloride and boiled for 15 minutes. Upon being removed from the boiling solution, the wire shall be immediately dipped in a 10 percent (by weight) aqueous solution of sodium chloride at room temperature. The wire shall then be removed from this solution and, without removing the adhering liquid, shall be allowed to dry for 24 hours at room temperature. The wire shall then be rinsed in lukewarm water, allowed to dry, and examined for corrosion.

5. PREPARATION FOR DELIVERY.

5.1 Packaging. Packaging shall be level A, or C, as specified (see 6.1).

5.1.1 Unit of issue. One brush, as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in table IV shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table IV. Packaging Quantities

Unit package	Intermediate package	Exterior container
1 unit	12 units	288 units

5.1.2.1 Variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Unit package. Each unit shall be packaged in a box of appropriate size, constructed in accordance with PPP-B-566, or PPP-B-676, except that commercial colors will be acceptable. Closure shall be adequate to prevent accidental opening.

5.1.3.2 Intermediate package. Intermediate package shall be a box of appropriate size and design, constructed in accordance with PPP-B-636, type CF, class weather-resistant. Boxes shall be closed by taping the top and bottom flaps with 2-inch wide tape conforming to PPP-T-76. Closing of bottom flap with either adhesive (conforming to MMM-A-250) or metal stitches is permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

5.1.4 Level C. Units shall be packaged in standard commercial containers, of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.1).

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and shall be constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant, grade V3. Closure and strapping shall be as specified in the appendix of the applicable box specification.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and shall be constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers, of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Civil agencies. Marking for shipment shall be in accordance with FED-STD-123.

5.3.2 Military activities.

5.3.2.1 Interior packages. Each unit package and each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type of brush required (see 1.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.2 Specification changes. The margins of this specification have not been marked with asterisks to indicate where changes (additions, modifications, corrections, or deletions) from the previous issue were made due to the extensive changes to this document.

6.3 Limitations. This specification does not cover all types, classes, grades, styles, or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover those items which are normally procured to meet Federal Government requirements.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6520-1250

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

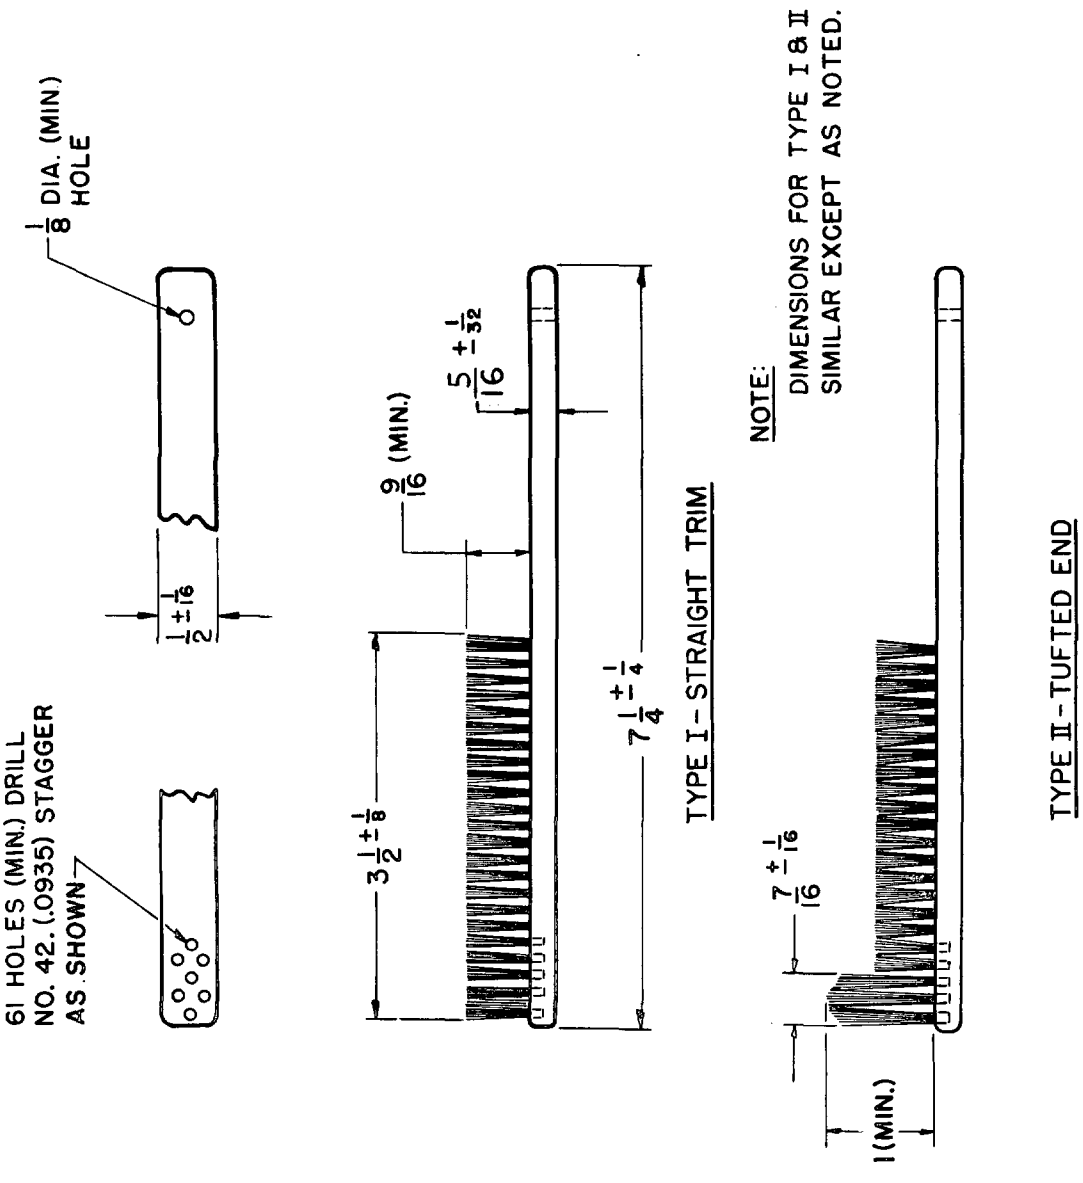


FIG. 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

H-B-00185a(DSA-DM) FSN:

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64, WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.