H-B-00190a(GSA-FSS)
August 19, 1966
INTERIM REVISION OF
Fed. Spec. H-B-190
March 13, 1963

INTERIM FEDERAL SPECIFICATION

BRUSHES, DUSTING

This Interim Federal Specification was developed by the Federal Supply Service, General Services Administration, Washington, D.C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification H-B-190, dated March 13, 1963.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers dusting brushes, with filler set in wood or twisted wires.

1.2 Classification.

1.2.1 Types, styles, classes, and sizes. Dusting brushes shall be of the following types, styles, classes and sizes, as specified (see 6.2 and 6.3).

Type I.- Brush, dusting, bench.

Style 1.- Bakery bench.

Style 2.- Counter (general use).

Class 1.- Hog bristle.
Class 2.- Horsetail hair.

Type II.- Brush, dusting, ceiling and wall.

Class 1.- Hog bristle.

Class 2.- Horsetail hair.

Size 1.- 8 inch block.
Size 2.- 12 inch block.

Type III.- Brush, dusting, draftsman's.

Class 2.- Horsetail hair.

Type IV. Brush, dusting, radiator.

Class 1. Hog bristle, twisted-wire body, wood handle.

Class 2.- Horsetail hair, wood block and handle.

Class 3.- Tampico fiber, twisted-wire body, wood handle.

Type V. Brush, dusting, office machine.

Class 1.- Hog bristle.

Class 2.- Horsetail hair.

Class 4.- Blend of horsetail hair and hog bristle.

FSC 7920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards of the issues in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

Federal Specifications:

R-N-91 - Naphthalene, Technical.
PPP-B-636 - Box, Fiberboard.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Standard product. Brushes covered by this specification shall be standard products of the manufacturer except for such deviations from the manufacturer's standards as may be required by this specification.

3.2 Figures. Figures incorporated in this specification are included for convenience of identification and are not intended to preclude the purchase of brushes otherwise in accordance with the requirements of this specification.

3.3 Preproduction sample. When specified (6.2), before production is commenced, a sample of the finished item covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

3.4 Materials. Material shall be as hereinafter specified. Materials not specifically defined shall be as regularly used by the manufacturer.

3.4.1 Wood. Wood for blocks and handles shall be close-grained and straight-grained hardwood.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

3.4.2 Wire.

3.4.2.1 Twisting wire. Twisting wire shall be not less than 0.109-inch-diameter wire, commercially identified as "brush handle wire" and be either hot-dip zinc-coated, electro-deposited zinc plated, or cadmium plated and shall show no evidence of corrosion when tested as described in 4.3.5.

3.4.2.2 Drawing wire. Drawing wire shall be not less than 0.015-inch-diameter brass wire.

3.4.2.3 Staple wire. Staple wire shall be not less than 0.034-inch-diameter, commercial, steel-staple wire, coated to show no evidence of corrosion when tested as described in 4.3.5.

3.4.3 Setting material. Brush-filler setting material shall be high-quality brush maker's pitch or other suitable setting compound.

3.4.4 Brush filler. Brush-filler material shall be bristle, fiber, hair, or a combination of bristle and hair as hereinafter specified. Material shall be straight and resilient with no artificial coloring matter added. When tested as specified in 4.3.1, there shall be no perceptible change in stiffness or evidence of artificial color.

3.4.4.1 Bristle. Bristle shall be natural hog bristle, cleaned and sterilized as specified in 3.8.

3.4.4.2 Fiber. Fiber shall be tampico fiber, medium grade, natural and unbleached.

3.4.4.3 Hair. Hair shall be extra stiff, natural horsetail hair, cleaned and sterilized as specified in 3.8.

3.5 Construction. Construction shall be as hereinafter specified. The brush-filler material used to form the brush part shall conform to the requirements specified in 3.4.4 through 3.4.4.3, as applicable for the class brush required.

3.5.1 Blocks. Blocks shall be made from wood specified in 3.4.1 and shall be as hereinafter specified.

3.5.1.1 Handle part. The handle part of brushes shall be shaped to provide a comfortable handgrip. At the option of the manufacturer, type V brushes may have a shaped handle. Unless otherwise specified herein, the handle end shall be provided with a hole not less than 3/16-inch diameter or other equally satisfactory means for hanging the brush by the handle when not in use.

3.5.1.2 Brush part. The brush part of blocks shall conform to the dimensional requirements of the applicable table. The drilled holes for brush-filler material shall be located so as to insure an even distribution of brush-filler material.

3.5.2 Set. Brush-filler material shall be set in the brush part in such a manner that, when tested as specified in 4.3.2, it shall not be possible to easily remove the brush-filler material from the brush part of staple-set, and twisted-in wire brushes. The compound set and wire drawn brush-filler material shall not be removable without breaking the brush-filler material.

3.5.2.1 Staple set. The brush-filler material shall be cut to double length and center folded in quantities to insure individual tufts of such size to fit snugly, when inserted in the holes provided in the block. Stapling shall be accomplished so that the staples made from wire specified in 3.4.2.3 and brush-filler material are driven to the bottom of the holes, with the staple securely imbedded in the wood.

3.5.2.2 Compound Set. The brush-filler material shall be cut to suitable lengths and bound into tufts by not less than five turns of thread. The thread-bound end shall be dipped in setting material specified in 3.4.3 and redipped after knotting the thread. Tufts shall be of such size to fill the holes provided in the block and shall be secured in the holes with sufficient setting material to insure firmly set brush filler material. Not more than 1/8 inch of setting material shall be visible on the exposed brush-filler material of the finished brush.

3.5.2.3 Twisted in wire. The brush-filler material shall be cut to suitable length and securely held at the center in the twists of one twisting wire specified in 3.4.2.1, bent double. The brush-filler material shall be evenly distributed and shall form a spirally wound round brush head. The wire, at the brush end, shall form a loop not less than 1/4-inch diameter, for hanging.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

3.5.2.4 Wire, drawn. Continuous length of drawing wire specified in 3.4.2.2 shall be looped up from the underside of the block in predrilled holes. Brush filler, cut to suitable length and of sufficient quantity to fill the holes provided, shall be secured at the centers in the drawn loops of wire. The drawing wire in the finished brush shall be concealed within the brush head.

3.5.3 Trim. The brush-filler material lengths shall be evenly and uniformly trimmed to conform to the dimensional requirements of the finished brushes as specified in tables I through VI, as applicable.

3.5.4 Weight. Brush-filler material weight shall be as shown in tables I through VI, as applicable, when tested as specified in 4.3.3.

3.6 Finish. Wood handles and blocks, except type IV, shall be coated with varnish, lacquer, or other suitable clear organic material in accordance with the manufacturer's regular commercial practice. At the option of the manufacturer, type IV handles may be furnished with a plain, smooth sanded finish.

3.7 Marking for identification. Unless otherwise specified (6.2), in addition to any special marking required by the contract or order, the contractor shall permanently indent his name or trademark of such known character as to be easily identifiable with said manufacturer on the handle of each brush. The indented marking shall be coated with a commercial, waterproof stencil paint.

3.8 Sterilization. Horsetail hair and hog bristle shall be sterilized after thorough washing and rinsing, in accordance with any one of the procedures specified in 3.8.1, 3.8.2, or 3.8.3. A properly checked steam-pressure gauge (applicable for the method in 3.8.3) and a thermometer (for all methods), both visible from the outside of the chambers, shall be provided with a suitable recording device to provide a record of the pressure, when applicable, and temperature of the disinfecting chamber.

3.8.1 Boiling water. Hog bristle and horsetail hair shall be soaked in boiling water (212°F.) for not less than 30 minutes.

3.8.2 Dry heat. Hog bristle and horsetail hair shall be placed in a chamber and a temperature above 284°F. shall be developed and maintained for not less than 3 hours.

3.8.3 Autoclaving. Horsetail hair and hog bristle shall be placed in a pressure chamber for a minimum of 20 minutes at not less than 15 pounds pressure per square inch at a temperature not less than 248°F.

3.9 Detailed requirements.

3.9.1 Type I brushes. Type I brushes shall conform to the applicable requirements of table I for the style and class brush required. Design shall be similar to figures 1 or 2 as applicable. The block and handle shall be one integral piece, having a well-rounded back along the brush part of the block.

3.9.1.1 Type I, style 1, bakery-bench brush. Bakery-bench brush-filler material shall be staple set in accordance with 3.5.2.1. The end of the brush part of the block shall be beveled upward to insure that the brush-filler material extends beyond the brush not less than one inch.

3.9.1.2 Type I, style 2, counter brush (general use). Class 1 brush-filler material shall be compound set in accordance with 3.5.2.2. At the option of the manufacturer, class 2 brush-filler material shall be compound set in accordance with 3.5.2.2, or set with staples in accordance with 3.5.2.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

TABLE I. Type I, styles 1 and 2, bakery bench and counter brush (general use), requirements

Requirement	Unit of measure	Style 1	Style 2		
		Classes 1 and 2 staple set	Class 1 compound set	Class 2 staple set	Class 2 compound set
Block:					
Length, overall (min.)	inches	13	13	13	13
Length, brush part (min.)	inches	8	8	8	8
Width, brush part	inches	1-3/4 + 1/16	1-3/4 + 1/16	1-3/4 + 1/16	1-3/4 + 1/16
Thickness, brush part (min.)	inches	13/16	13/16	13/16	13/16
Holes:					
Number					
In outside rows (min.)		41	34		34
In inside rows (min.)		47	24		24
Total (min.)		88	58	85	58
Number of rows				5	
Diameter:					
Inside rows (min.)	inch	3/16	5/16	13/64	1/4
Outside rows (min.)	inch	3/16	3/16	13/64	3/16
Depth (min.)	inch	5/16	15/32	5/16	15/32
Bristle:					
Length clear of block (min.)	inches	3	2-3/4		
Weight (min.)	ounces	3	3		
Spread of bristles (approx.)	inches	4	4-1/2		
Hair:					
Length clear of block (min.)	inches	3-1/4		2-3/8	2-3/4
Weight (min.)	ounces	4		3-1/2	3-1/2
Spread of hair (approx.)	inches	4		4	4

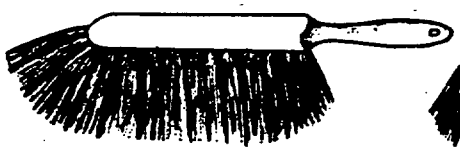


FIGURE 1.

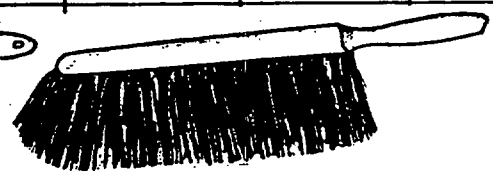


FIGURE 2.

3.9.2 Type II, ceiling and wall brush. Type II brushes shall conform to the applicable requirements of table II for the size brush required. Design shall be similar to figure 3. Brush-filler material shall be staple set in accordance with 3.5.2.1, or compound set in accordance with 3.5.2.2.

3.9.2.1 Block. The wood block for sizes 1 and 2 brushes shall be 2 inches, plus or minus 1/8 inch, in diameter at the center and tapering in diameter to 1-1/2 inches, plus or minus 1/8 inch, in diameter at the ends. Overall length shall be as shown in table II.

3.9.2.2 Holes. The holes in the brush part of the block for type II brushes shall be placed at an angle to produce an even distribution of bristle or hair throughout the brush, and a lateral spread of bristle or hair of 5-1/4 inches, plus or minus 1/4 inch, in the portion between the ball ends. The holes shall be located entirely around each end of the block, covering a distance of approximately 1-3/8 inches from the ends, in such a manner as to produce a brush with rounded or ball ends. In the center of the block there shall be a 3/4-5 Acme thread tapped handle hole.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

3.9.2.3 Handle. When specified (6.2), handles for type II brushes shall be required. Handle length shall be as specified (6.2). A tolerance of plus or minus one inch in handle length will be permitted. The handle shall be one-piece or two-piece joint construction. One end shall have a 3/4-5 Acme thread for a distance of not less than 1-1/16 inches to fit the tapped hole in the block.

TABLE II. Type II, ceiling and wall brush, requirements

Requirement	Unit of measure	Size 1	Size 2
Block:			
Length	inches	8 ± 1/4	12 ± 1/4
Holes for bristle or horsehair:			
Depth, minimum	inch	3/8	3/8
Diameter of holes, outside rows, minimum	inch	7/32	7/32
Diameter of holes, inside rows, minimum	inch	9/32	9/32
Number of holes, outside rows, minimum		42	54
Number of holes, inside rows, minimum		70	110
Hole for handle:			
Depth	inches	1-1/2	1-1/2
Handle:			
Diameter	inch	7/8 ± 1/32	7/8 ± 1/32
Bristle:			
Length clear of block	inches	2-7/8 ± 1/16	2-7/8 ± 1/16
Weight of bristle per brush, minimum	ounces	6.0	9.0
Horsehair:			
Length clear of block	inches	2-3/8 ± 1/16	2-3/8 ± 1/16
Weight of horsehair per brush, minimum	ounce	6-1/4	9-1/3

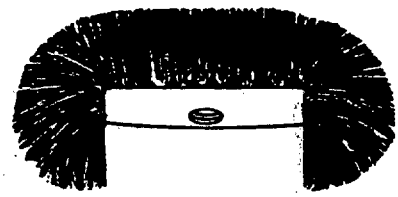


FIGURE 3

3.9.3 Type III draftsman's brush. Type III brushes shall conform to the requirements of table III. Design shall be similar to figure 4. Brush-filler material shall be wire drawn or staple set in accordance with 3.5.2.1 or 3.5.2.4, as applicable. Handle and block shall be one-piece, wood construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

TABLE III. Type III, draftsman's brush, requirements

Requirement	Unit of measure	Measure
Block:		
Length, over-all	inches	13-1/2 ± 1/4
Length, brush part	inches	8 ± 1/8
Width, brush part	inches	1-1/4 + 0 -1/2
Thickness, brush part	inches	5/8 +0 -1/4
Holes:		
Number, minimum		25 (1 row)
Diameter, minimum	inch	3/16
Depth, minimum	inch	5/16
Spacing, center to center, approx,	inch	5/16
Location		Middle of brush part of block
Hair:		
Weight, minimum	ounces	1.0
Length, clear of block	inches	2-1/4 ± 1/4

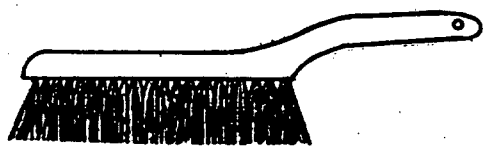


FIGURE 4

3.9.4 Type IV, radiator brush.

3.9.4.1 Type IV, classes 1 and 3 twisted in wire brush. Twisted in wire brushes shall conform to the requirements of table IV. Design shall be similar to figure 5.

3.9.4.1.1 Handle. Handle for type IV, classes 1 and 3 brushes shall be wood securely attached to the extension of the twisted wires in such a manner that the handles will not pull free of the wires, when tested as specified in 4.3.4. The end of the handle shall be fitted with a screw eye, or shall have a through hole not less than 3/16-inch diameter located 3/4 inch, plus or minus 1/4 inch, from the free end. As an alternate construction, one end of the body wire shall extend through the handle and shall be turned back to form an eye for hanging.

TABLE IV. Type IV, classes 1 and 3, radiator brush, requirements

Requirement	Unit of measure	Measure
Length, over-all	inches	20-1/2 ± 1/2
Brush head:		
Diameter	inches	2-3/8 ± 1/16
Length	inches	7 ± 1/4
Handle:		
Diameter	inches	1 ± 1/16
Length	inches	4-1/2
Bristle or Fiber: Weight, minimum	ounces	7/16



FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

3.9.4.2 Type IV, class 2, wood block and handle. Type IV, class 2 brushes shall conform to the requirements of table V. Design shall be similar to figure 6. Handle and block shall be one-piece wood construction. Brush material shall be wire drawn or staple set in accordance with 3.5.2.1 or 3.5.2.4, as applicable.

TABLE V. Type IV, class 2, radiator brush, requirements

Requirement	Unit of measure	Measure
Block:		
Length, over-all	inches	24 or 32 ± 1/4
Length, brush part, minimum	inches	9-1/2
Width, center of brush part	inches	1-1/8 ± 1/8
Thickness, brush part	inch	3/8 ± 1/16
Holes:		
Diameter, minimum	inch	11/64
Depth, minimum	inch	5/16
Number, minimum		32
Number of rows		1
Hair:		
Weight, minimum	ounces	1.21
Length clear of block, minimum	inches	2-1/8




FIGURE 6.

3.9.5 Type V, office machine brush. Type V brushes shall conform to the requirements of table VI. Design shall be similar to figure 7. Brush-filler material shall be staple set in accordance with 3.5.2.1. Handle and block shall be one-piece, wood construction, having beveled edges. The edges shall be smoothly finished with no rough or sharp places.

TABLE VI. Type V, office machine brush, requirements

Requirement	Unit of measure	Measure
Block:		
Length, over-all	inches	10-1/4 ± 1/4
Length, brush part	inches	5-1/2 ± 1/2
Width, brush part	inches	1-1/2 ± 1/4
Thickness, over-all	inch	9/16 ± 1/8
Holes:		
Number of rows (min.)		3
Number of holes outside rows (min.)		10
Number of holes inside row (min.)		11
Diameter of holes	inch	3/16 ± 1/16
Depth of holes (min.)	inch	1/4
Handle:		
Length	inches	5 ± 1/4
Brush-filler:		
Hair, bristle, or combination thereof, weight (min.)	ounces	1-1/2
Length, clear of block (min.)	inches	1-1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.




FIGURE 7.

3.10 Workmanship. The brushes shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling and inspection for acceptance. Except when otherwise specified by Civil Government agencies (6.2) sampling and inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter. For purpose of sampling, an inspection lot for acceptance inspection and tests shall consist of all material of the same type, style, class, and size offered for delivery at one time.

4.2.1 Inspection of components and materials. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or, if none, in accordance with this specification. In the event of conflict, this specification shall govern.

4.2.1.1 Certification of compliance. Components and materials listed below may be accepted on the basis of a contractor's certification of compliance for requirements specified in applicable paragraphs of this specification.

Component	Characteristic	Requirement paragraph
Horsetail hair	Sterilization	3.8
Hog bristle	Sterilization	3.8

4.2.2 Process examination. Examination shall be made of the composition and thickness of drawing wire, the thickness and coating of staple wire, the depth of holes for brush-filler material, and the binding, dipping, and setting of compound set brushes, to establish that no deviation is made from the specified procedure or requirement. Whenever a deviation is noted, correction shall be made. Failure to make immediate correction shall be cause for rejection of affected end-item lots.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

4.2.3 Inspection of the end item.

4.2.3.1 Examination of the end item. Examination of the end item shall be in accordance with the classification of defects, inspection levels and acceptable quality levels (AQL's) set forth below. The lot size, for the purpose of determining the sample size in accordance with MIL-STD-105, shall be expressed in units of brushes for examination under 4.2.3.1.1 and 4.2.3.1.2.

4.2.3.1.1 Examination of the end item for defects in material, construction and workmanship. The sample unit for this examination shall be one brush.

Examine	Defect
Materials: Wood (blocks and handles)	Not a close-grained and straight-grained hardwood.
Twisting wire	Not zinc or cadmium plated.
Bristle	Not natural hog bristle; not stiff and resilient.
Fiber	Not natural, unbleached, tampico fiber.
Hair	Not extra-stiff horsetail hair.
Construction and appearance	Handle portion of brush not shaped to provide comfortable handgrip when specified.
	Handle end not provided with hole or other means for hanging brush.
	Wood component not finished with varnish, lacquer or suitable clear organic material.
	Brush-filler material not securely held in block or twisted-wire handle; can be easily removed by hand.
	Exposed sharp wire, nails, sharp edges or splinters.
Type I brush	Not of the general design as shown on figures 1 or 2, as applicable.
	Not class specified.
	Block and handle not one integral part; back of brush part of block not well rounded.
Style I	End of brush part of block not beveled upward; brush-filler material does not extend at least one inch beyond end of block.
Type II brush	Not of the general design as shown on figure 3; does not have rounded or ball ends.
	Not class specified.
	Block does not have hole in center for attaching handle; hole not threaded with 3/4-5 Acme thread.
	Handle (when specified) not one-piece construction or two-piece jointed construction; handle not threaded on one end with Acme thread; does not snugly engage thread of block.

(continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

Examine	Defect
Type III brush	Not of the general design as shown on figure 4.
	Not class specified.
	Handle and block not one-piece construction.
Type IV brush	Not of the general design as shown on figures 5 or 6 as applicable.
Classes 1 and 3	Not formed from one piece of twisting wire, bent double, as specified; brush-filler material does not form spirally wound, round brush head.
	Wood handle not securely held on extension of twisted wire.
Class 2	Handle and block not one-piece construction.
Type V brush	Not of general design as shown on figure 7; does not have beveled edges.
	Not class specified.
	Edges not smoothly finished.
	Handle and block not one-piece construction.
Workmanship	Brush-filler material not evenly distributed in brush head.
	Brush-filler material not clean; evidence of dirt or foreign matter.
	Brush head not evenly trimmed.
	Wood components not smoothly finished; splintered, torn or loose grain.
	Threads on block or handle stripped or damaged (type II only).
	Sharp edge on wire which might cause injury.
	Identification marking omitted, incomplete, incorrect or not as specified.

4.2.3.1.2 Dimensional examination. Examination shall be made of the end item to determine compliance with dimensional requirements. Any dimension not within the specified requirements shall be classified as a defect. The sample unit for this examination shall be one brush.

Examine	Defect
All types	Any dimension not within the tolerance specified for the applicable type, style, class or size (see tables I through VI).
	Number of holes less than specified in applicable table.
Type II only	Center of wood block not 2 inches in diameter, tapering to 1-1/2 inches in diameter (a tolerance of plus or minus 1/8 inch is allowed).
	Lateral spread of bristle or hair in portion between the ball ends less than 5 inches or greater than 5-1/2 inches.
	Handle (when specified) varies from specified length by more than plus or minus 1 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

4.2.3.1.3 Inspection levels and acceptable quality levels (AQL's) for examination. The inspection levels for determining the sample size and the acceptable quality levels (AQL's), expressed in defects per hundred units, shall be as follows:

Examination paragraph	Inspection level	AQL
4.2.3.1.1	I	4.0
4.2.3.1.2	S-2	2.5
4.2.4	S-2	4.0

4.2.3.1.4 Testing of the end item. The end item shall be tested for the applicable characteristics as indicated in table VII herein, from each lot presented for examination of each type, style, class, and size brush. The sample unit shall be one brush and the lot size shall be expressed in units of brushes. The inspection level and acceptable quality level shall be as indicated in table VII.

TABLE VII. Instructions for testing

Characteristic	Specification reference		Requirements applicable to		No. determinations per unit	Results reported as		Inspection level	AQL
	Requirement	Test method	Individual unit	Lot average		Pass or fail	Numerically to nearest		
Tightness of filler material	3.5.2	4.3.2	X	-	10	X	-	S-2	4.0
Soak test	3.4.4	4.3.1	X	-	1	X	-	S-2	4.0
Weight of bristle, fiber and hair	3.5.4 and Tables I thru VI	4.3.3	-	X	1	-	0.1 ounce	S-2	-
Corrosion resistance of wire	3.4.2.1 and 3.4.2.3	4.3.5	X	-	1	X	-	S-2	4.0
Pull test for handle	3.9.4.1.1	4.3.4	X	-	1	X	-	S-2	4.0

4.2.4 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the packaging, packing and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with table VIII. For examination of interior packaging the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 defects per hundred units.

TABLE VIII. Classification of preparation for delivery defects

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing, or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, or distortion of container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

4.3 Tests.

4.3.1 Soak test. Bristle, fiber, and hair shall be soaked in boiling water (212°F.) for not less than one hour and examined for compliance with 3.4.4.

4.3.2 Brush-filler material tightness. Individual strands of brush-filler material shall be held between the thumb and forefinger and pulled to determine compliance with 3.5.2.

4.3.3 Bristle, fiber, and hair weight. Bristle, fiber, hair, or the combination of hair and bristle shall be removed from the brush and conditioned for not less than 16 hours in air at a relative humidity of 50, plus or minus 4 percent, and at a temperature of 23, plus or minus 1.1 degrees centigrade. Weighing for compliance with 3.5.4 shall be performed in the same atmosphere.

4.3.4 Pull test for handle. With the loop end of the brush securely attached to an immovable object, an attempt shall be made to pull the handle free of the wire by hand.

4.3.5 Corrosion resistance test. For purposes of this test, the twisting wire and wire staples, as applicable, shall be removed from sample brushes selected for testing in 4.3.3. The wire shall be tested for corrosion resistance by placing the samples in a boiling 10 percent (by weight) aqueous solution of sodium chloride for a period of 15 minutes. The wire samples upon being removed from this solution shall be immediately immersed for at least one hour in 10 percent (by weight) aqueous solution of sodium chloride at room temperature. They shall then be removed from this solution and, without having the adhering liquid wiped off, allowed to dry for 24 hours at room temperature. The wire shall then be examined for compliance with 3.4.2.1 or 3.4.2.3, as applicable.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Twelve brushes of like description shall be packaged in a close-fitting box conforming to PPP-B-636, class weather-resistant. Each box shall contain not less than 3 balls or an equivalent quantity of flake napthalene conforming to R-N-91. The box shall be closed in accordance with the appendix to the box specification.

5.1.1.1.1 Type I or II. Type I or II brushes shall be arranged in the box in two layers of six each with a fiberboard pad between the layers. The fiberboard shall meet the requirements of PPP-F-320, type CF, class domestic, variety SW, and shall be 1/2 inch less than the inside length and width dimensions of the box.

5.1.2 Level B.

5.1.2.1 Unit packaging. Twelve brushes of like description shall be packaged in a close-fitting box conforming to PPP-B-636, class domestic. Each box shall contain not less than 3 balls or an equivalent quantity of flake napthalene conforming to R-N-91. The box shall be closed in accordance with the appendix to the box specification.

5.1.2.1.1 Type I or II. Type I or II brushes shall be arranged in the box in two layers of six each with a fiberboard pad between the layers. The fiberboard shall meet the requirements of PPP-F-320, type CF, class domestic, variety SW, and shall be 1/2 inch less than the inside length and width dimensions of the box.

5.1.3 Level C. The brushes shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The suppliers commercial practice will be acceptable when it fulfills the above requirements.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Unit packages of brushes of like description in quantities as specified in table IX shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant. The box shall be closed and strapped in accordance with the appendix to the box specification.

5.2.2 Level B.

5.2.2.1 Type I or II. Type I or II unit packages of brushes require no packing.

5.2.2.2 Type III, IV or V. Type III, IV or V unit packages of brushes of like description in quantities as specified in table IX shall be packed in a close-fitting box conforming to PPP-B-636, class domestic. The box shall be closed in accordance with the appendix to the box specification.

5.2.3 Level C. The brushes shall be packed to insure carrier acceptance and safe delivery at destination at the lowest rates, in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 Marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

5.3.1 Civil agencies. In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military activities. In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

TABLE IX. Packing quantities

Type of brush	Unit packages per shipping container
I	4
II	2
III	8
IV	6
V	6

6. NOTES

6.1 Intended use. The brushes covered by this specification are intended to be used for dusting operations as indicated by the nomenclature of the various brushes covered.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Type, style, class, and size of brush required (1.2).

(c) When preproduction sample is required (3.3).

(d) Identification marking required if other than specified (3.7).

(e) When handles are required for type II, ceiling and wall brushes (3.9.2.3).

(f) Handle length required (3.9.2.3).

(g) When sampling and inspection shall be performed in accordance with other than the provisions set forth in MIL-STD-105 (4.2).

(h) Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

6.3 Illustrations. The illustrations shown herein as figures 1 thru 7 are descriptive and not restrictive, and are not intended to preclude the purchase of brushes otherwise conforming to this specification.

GSA DC 67-4671

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.