H-B-0051C(GSA-FSS)
January 11, 1972
INTERIM REVISION OF
Fed. Spec. H-B-51b
October 14, 1960

INTERIM FEDERAL SPECIFICATION

BROOM, UPRIGHT (CORN)

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal specification as a valid exception to Federal Specification H-B-51b, dated October 14, 1960.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers upright brooms made primarily of corn fiber for light- and heavy-duty sweeping of floors (see 6.1).

1.2 Classification.

1.2.1 Types and sizes. Brooms covered by this specification shall be of the following types and sizes (based on nominal weights per dozen), as specified (see 6.2).

Type I - Hearth and parlor brooms (see 3.1.1).

Size 1 - 8-pound (hearth).
Size 2 - 18-pound (parlor).
Size 3 - 28-pound (parlor).

Type II - Warehouse (see 3.1.2).

Size 4 - 32-pound.
Size 5 - 36-pound.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation to bid or request for proposal form a part of this specification to the extent specified herein.

Federal Specifications:

T-R-650 - Rope, Yarn and Twine, Base Fiber.
T-T-871 - Twine, Cotton, Wrapping.
T-T-911 - Twine, Jute.
T-T-1613 - Twine, Olefin, Polypropylene.
QQ-W-461 - Wire, Steel, Carbon (Round, Bare, and Coated).
CCC-C-429 - Cloth, Osnaburg, Cotton.
CCC-C-467 - Cloth, Burlap, Jute (or Kenaf).
PPP-B-636 - Box, Fiberboard.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).
Fed. Test Method Std. No. 191 - Textile Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Office in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

American Society for Testing and Materials (ASTM) Standards:

D 2016 - Tests for moisture content of wood.
D 2256 - Strength and elongation of yarn (Single Strand Method).

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

Commercial Standards:

CS 35-61 - Hardwood Plywood.

(Copies of Commercial Standards, which are Department of Commerce Publications, may be obtained upon application accompanied by money order, coupon, or cash to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

National Motor Freight Traffic, Association Inc., Agent:

National Freight Classification Committee:

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N. W., Washington, DC 20036.)

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, IL, 60606.)

3. REQUIREMENTS

3.1 Material.

3.1.1 Quality B broomcorn for type I parlor or hearth brooms. All quality B broomcorn fibers for parlor or hearth brooms shall be fine or medium gage, green to yellow in color, except ripe yellow. Hurl broomcorn shall be free from all defects except bleached fibers in medium degree. The inside or underwork shall be free from all defects except bleached, wavy, or stained fibers in medium degree. All fibers shall be free from seed with the greatest amount of seed fiber retained. (See 6.3.)

3.1.2 Quality C broomcorn for type II warehouse brooms. All quality C broomcorn fibers shall be fine, medium or coarse gage of any natural growth color. Hurl broomcorn fibers shall be free from all defects except red, wavy, or stained fibers in medium degree. Fibers for inside or underwork shall be free from all defects except burly **growth** large spikes, mold, and in severe degree burn. All fibers shall be free from seed with the greatest amount of seed fiber retained. (See 6.3.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

3.1.3 Other vegetable fibers. Vegetable fibers other than broomcorn permitted in the underwork shall be palmyra stalks, palmetto fiber, split rattan, prime quality piassava fiber, African bass, palm leaf (shredded), Navajo fiber, or New Mexico yucca (shredded). Fibers shall be free from seed with the greatest amount of seed fiber retained.

3.1.4 Artificial color in fibers. Unless otherwise specified, a light green broom dye shall be permitted.

3.1.5 Broom wire. Broom wire shall be heat-treated or cold-drawn low-carbon steel wire (maximum carbon content 0.15 percent) in accordance with QQ-W-461, except that the tensile strength shall be 125,000 to 150,000 pounds per square inch. The wire shall be finished to resist corrosion under normal service conditions by one of the following methods at the option of the manufacturer: (1) Heat-treated steel wire - black finish; (2) cold-drawn steel wire - zinc coated in accordance with class 1 or 2 of QQ-W-461, or tinned in accordance with QQ-W-461. The diameter of the wire shall be not less than 0.038 inch.

3.1.6 Wood for handles. Unless otherwise specified, wood for handles may be any of the following species at the option of the manufacturer: High or medium density beech, birch, pecan, or maple as classified in Commercial Standard CS 35-61; ramin (Gonystylus spp.) (see 6.4); or Douglas fir or southern yellow pine (see 3.1.7). The wood shall be straight grained, thoroughly seasoned, and free from defects that could mar its appearance or affect its serviceability (see 4.2.2.2, table IV). The moisture content of wood handles shall not exceed 15 percent when tested as specified in 4.2.1.3.

3.1.7 Finish on handles. Handles of Douglas fir or southern yellow pine shall be finished with at least one coat of clear lacquer or varnish. Other woods may be uncoated.

3.1.8 Broom twine. At the option of the manufacturer, broom twine for tying the broom fibers in place shall be one of the following twines:

(1) Hemp (cannabis sativa), uniformly spun and polished.
(2) Mixture of hemp (cannabis sativa) and not more than 25 percent jute (corchorus capsularis or corchorus olitorius), uniformly spun and polished.
(3) Cotton twine.
(4) Polypropylene twine, continuous filament or twisted slit film of sufficient pliability to be used in equipment for sewing brooms.

3.1.8.1 Twine from vegetable fibers. Twines specified in (1), (2), and (3) of 3.1.8 shall meet the requirements in table I when tested by the applicable methods specified in table IV.

TABLE I. Requirements for twine made of vegetable fiber

Characteristic		Values for: Hemp(1)	Hemp and jute(2)	Cotton(3)
Size designation		18	18	-
Number of plies, minimum		3	3	3
Length per pound, minimum, average	feet	1100	1100	1100
Breaking strength, minimum, average	pounds	42	42	42

3.1.8.2 Polypropylene twine. Polypropylene twine specified in (4) of 3.1.8 shall meet requirement in table II when tested by the applicable methods specified in table IV.

TABLE II. Requirements for polypropylene twine

Characteristic		Value
Number of plies, minimum		3
Length per pound, minimum, average	feet	2700
Softening point, minimum,	°F.	310-320
Breaking strength:		
Original, minimum, average	pounds	42.0
After aging, permissible decrease	percent	10
Elongation, maximum, average	percent	20
Loop strength, minimum, average	pounds	24
Finishing material, maximum	percent	4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

3.2 Construction. Brooms shall have the general appearance of the brooms shown in figure 1. Detailed requirements applicable to each type of finished broom shall be as specified in table III.

TABLE III. Physical requirements for brooms

Characteristic	Type I			Type II	
	Hearth Broom	Parlor Broom		Warehouse Broom	
	Size 1 8-lb.a/	Size 2 18-lb.a/	Size 3 28-lb.a/	Size 4 32-lb.a/	Size 5 36-lb.a/
Neck length, minimum . . . . . inches	1	1	1-1/2	1-1/2	2
Broom body:	-4371		-4375		-8305
Width:					
Minimum . . . . . inches	6	9	11	11	12
Maximum . . . . . do.	8	11	12-1/2	14	14
Length:					
Minimum . . . . . inches	12	14	15	16	17
Maximum . . . . . do.	13	15	16	17	18
Handles:					
Length:					
Minimum . . . . . inches	23	41	41	41	41
Maximum . . . . . do.	24	42	42	42	42
Diameter, minimum . . . . . inch	3/4	7/8	7/8	1	1
Extension into broom body, minimum . . . . . inches	2	4	4	4	4
Ties					
Number per broom, minimum .	2	3	4	4	5
Distance of first tie from neck					
Minimum . . . . . inches	2	3-1/2	4	4-1/4	4-1/2
Maximum . . . . . do.	3	4	4-3/4	5-1/4	6
Distance between ties:					
Minimum . . . . . inch	1/2	1/2	1/2	1/2	1/2
Maximum . . . . . do.	3/4	3/4	3/4	3/4	3/4
Stitches per tie:					
Minimum	7	7	8	8	9
Maximum	9	9	12	14	16
Weight per dozen with following handles minimum:					
Pecan, beech, birch, maple, or . . . . . pounds	-	17-1/2	27-1/2	31-1/2	35-1/2
Douglas fir or southern yellow pine . . . . . do.	8	-	25-1/2	29	32-1/2
Wire, diameter, minimum. . . . inch	0.038	0.038	0.038	0.038	0.038

a. Nominal weight.

b. The distance between the last two rows of stitches on the 32- and 36-pound brooms (counting down from the neck) may be increased to strengthen the broom body.

3.2.1 Broom body.

3.2.1.1 Type I - hearth and parlor brooms. At the option of the manufacturer hearth and parlor brooms shall be composed of (a) all Quality B broomcorn as specified in 3.1.1, or (b) two-thirds by weight of such Quality B broomcorn and the remainder vegetable fibers complying with 3.1.3. When vegetable fibers are used, they shall be restricted to the underwork in an amount equivalent to not more than 50 percent by weight of the handle and shoulder corn. Under no circumstances shall vegetable fibers be used in place of outside or inside hurl. The ends of the fibers shall form an even dense working surface. The layers of fibers shall be secured to the handle with broom wire and fastened off as specified in 3.2.2.1. The broom body shall be tied in place by stitching with the broom twine specified in 3.1.8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

3.2.1.2 Type II warehouse brooms. The body of warehouse brooms shall be constructed as described in 3.2.1.1 and in accordance with the applicable requirements in table III, except that Quality C broom corn shall be used in place of Quality B, and the wire shall be fastened off as specified in 3.2.2.2.

3.2.2 Fastening of broom wire.

3.2.2.1 Type I hearth and parlor brooms. The upper end (neck) of hearth and parlor brooms shall be given a rundown finish, i.e., the wire shall be helically wound around the upper end (neck) of the broom, and the end of the wire secured to the handle.

3.2.2.2 Type II warehouse brooms. The upper end (neck) of warehouse brooms shall be fastened to the handle by not less than 10 turns for the 32-pound broom, and not less than 12 turns for the 36-pound broom. At least five turns shall be at the shoulder and at least five turns at the end. After the fibers are in place, the wire shall be secured inside the broom by a 7/8-inch double-pointed tack or by a 1-inch, 12-gage roofer's nail. The wire turns at the end shall be secured by at least one 13-gage copper or other corrosion resisting double-pointed tack. The tack shall be at least 5/8-inch in height by 1/4-inch wide and shall span all 5 or 6 turns. On the opposite side from the double-pointed tack, the end of the wire shall be secured to the handle by a broom nail not less than 5/8 inch in height, or another double-pointed tack spanning all turns and securing the end of the wire.

3.2.3 Handles. Handles shall be straight, of uniform diameter, and rounded at the handle end. Handles shall be finished as required in 3.1.7. The broom end of the handle shall extend into the broom body as specified in table III. A bow or warp that causes an eccentricity of not more than 3/8 inch when the handle is rolled on a flat surface shall be acceptable.

3.3 Marking. Each broom shall be permanently and legibly marked with the manufacturer's name or trademark of such character as is readily identifiable, or both.

3.4 Workmanship. Brooms shall be free from defects that may adversely affect their appearance or serviceablity. The finished broom shall conform to the quality and grade of product established by this specification and the occurrence of defects shall not exceed the applicable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.2.1 Component and materials inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested, and inspected in accordance with requirements of referenced specifications and standards to the extent specified, or, if none, in accordance with this specification.

4.2.1.1 Inspection of broomcorn and other vegetable fibers. For the purpose of inspecting broomcorn and other vegetable fibers, a lot shall consist of all fibers of the same classification (see 6.3) presented for delivery at one time. The lot size shall be expressed in pounds. The sample unit for inspection shall be one-half pound of broomcorn or other vegetable fiber (see 3.1.3). The inspection level shall be S-4, and the acceptable quality level (AQL) 4.0 defects per 100 units. Fibers shall be examined for fiber defects listed in table V. If the number of defects in the sample for examination exceeds the acceptance number in MIL-STD-105, the entire lot of fibers shall be considered as having failed to meet the requirements of this specification.

4.2.1.2 Inspection of broom twine. For the purpose of testing twine, a lot shall consist of all twine of the same kind (see 3.1.8) offered for delivery at one time. The lot size shall be expressed in pounds. The sample unit for testing shall be approximately 60 feet of twine. The inspection level shall be S-4 and the acceptable quality level 4.0 percent defective. Unless otherwise specified in table IV, broom twine shall be tested by the applicable method in Fed. Test Method Std. No. 191 specified therein for conformance with the applicable requirements in table I and II. Tests may be made under prevailing atmospheric condition except in settlement of dispute, in which case they shall be made upon material which has reached equilibrium under standard conditions as defined in Federal Test Method Standard No. 191. If any sample unit fails to meet any requirement for which tests are made, it shall be considered defective. If the number of defective sample units in the sample for test exceeds the acceptance number in MIL-STD-105, the entire lot of brooms shall be considered as having failed to meet the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

TABLE IV. Test methods for broom twine

Characteristics	Test Method	No. of Specimens
Number of plies	Visual	1
Softening point	1533	2
Length per pound	6004	2
Breaking strength:		
Original	6016	5
After aging	6016	5
Elongation	6016	5
Heat aging	Note a	
Loop strength	ASTM D 2256, Method B	3
Nonfibrous material, chloroform and water soluble	2611	2

a. Five specimens shall be aged for five days in a circulating air oven at a temperature of 80° ± 1.1°C (176° ± 2°F). The specimens shall be removed from the oven, conditioned for 24 hours in a standard atmosphere for textiles, and subjected to breaking strength test method 6016.

4.2.1.3 Inspection of handles. For the purpose of testing handles, a lot shall consist of all untreated handles of the same classification offered for delivery at one time. The sample unit for testing shall be one handle. The inspection level shall be S-4 and the acceptable quality level (AQL) 4.0 percent defective. Handles shall be tested for moisture content by method B of ASTM D 2016. Three determinations shall be made on each handle and the values obtained averaged and checked for conformance with 3.1.6. If any handle fails to meet the requirement for moisture content in 3.1.6, it shall be considered defective. If the number of defective handles in the sample exceeds the acceptance number in MIL-STD-105, the entire lot of handles shall be considered as having failed to meet the requirements of the specification.

4.2.2 End item inspection.

4.2.2.1 Lot. All brooms of the same quality, class, and weight offered for delivery at the same time shall be considered a lot for the purpose of examination.

4.2.2.2 Visual examination of the end item. Brooms shall be examined visually for defects listed in table V. The sample unit shall be one broom. The inspection level shall be S-4 and the acceptable quality level (AQL) 10.0 defects per 100 units. If the number of defects in the sample exceeds the acceptance number in MIL-STD-105, the entire lot of brooms shall be considered as having failed to meet the requirements of the specification.

TABLE V. Visual defects

Examination	Defects
Materials:	
Quality B broomcorn:	
Hurl or outside fibers	Not as specified in 3.1.1.
Inside or underwork	Not as specified in 3.1.1.
Quality C broomcorn:	
Hurl or outside fibers	Not as specified in 3.1.2.
Inside or underwork	Not as specified in 3.1.2.
Other vegetable fibers (for underwork only, when applicable)	Not as specified in 3.1.3.
Wire for neck fastening	Visible scratches on neck. Unevenly coated-bare spots visible. Corroded.
Twine	Damaged, weak spots, or cuts.
Construction and workmanship:	
Broom body:	
Fibers	Seeds remaining on fibers. Ends not properly trimmed - ragged or sawtooth edges. Do not form a dense working surface. Fibers damaged by insects.
Ties	Loose - do not hold broom body in place. Ends of twine not properly secured. Less than required number of rows. Less than required number of stitches per row.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

TABLE V. Visual defects (con.)

Examination	Defect
Neck fastening	Not as specified in 3.2.2.1 or 3.2.2.2, as applicable. Nail or tack not properly driven affecting serviceability.
Wood handles	Not straight-grain thoroughly seasoned wood. Not straight; crook (warp or bow) more than 3/8 inch when handle is rotated on flat even surface. Not evenly coated with at least one coat of varnish or lacquer as required in 3.1.7. Coating on handle tacky. Splinters, pitch, splits and other imperfections affecting serviceability. Any knot hole or loose knot. Sound knots over 1/2 inch in diameter. Any season check, fracture, or splits open or visibly concealed by filler.

4.2.2.3 Dimensional examination of the end item. Brooms shall be examined for conformance with the dimensional requirements in table III. The sample unit shall be one broom. The inspection level shall be S-2 and the acceptable quality level 2.5 percent defective. If any sample unit fails to meet any dimensional requirement in table III it shall be considered defective. If the number of defective units in the sample exceeds the acceptance number in MIL-STD-105, the entire lot of brooms shall be considered as having failed to meet the requirements of the specification.

4.2.2.4 Inspection for count. For the purpose of count a lot shall consist of all bundles of brooms offered for delivery at one time. The sample unit shall be one bundle. The inspection level shall be S-2 and the acceptable quality level 2.5 percent defective. If any bundle fails to meet the count requirement it shall be considered defective. If the number of defective bundles in the sample exceeds the acceptance number in MIL-STD-105, the entire lot shall be considered as having failed to meet the requirements of the specification.

4.2.2.5 Examination of preparation for delivery requirements. An examination will be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects will be scored in accordance with the list below. The sample unit shall be one shipping container fully packed, taken just prior to the closing operation. Defects of closure listed below will be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible of improper size, location sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as: incomplete closure of case liners, container flaps loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number per container is more or less than required.

4.2.2.6 Testing of the end item. Brooms shall be tested as specified in 4.3.1 for weight per dozen. The sample unit shall be twelve brooms taken at random from the lot. Not more than one broom shall be taken from a bundle or box. The inspection level shall be S-2 and the acceptable quality level (AQL) 10.0 percent defective. If any sample unit fails to meet the requirement specified in table I it shall be considered defective. If the number of defective sample units in the sample for test exceeds the acceptance number in MIL-STD-105, the entire lot of brooms shall be considered as having failed to meet the requirements of the specification.

4.3 Test procedures.

4.3.1 Weight per dozen brooms. Twelve brooms taken from the lot as specified in 4.2.2.6 shall be weighed on a suitable scale, accurate to 1/4 pound and the weight recorded to nearest 1/4 pound. The results shall be checked for conformance with the applicable requirement in table III.

5. PREPARATION FOR DELIVERY

5.1 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.1.1 Level A. The brooms shall be packed as specified in 5.1.1.1 or 5.1.1.2 (see 6.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

5.1.1.1 Bundling. Twelve brooms shall be securely tied together with cotton, hemp, jute or polypropylene twine passed through the broom bodies and tied. Cotton twine shall be a minimum 24-ply and conform to T-T-871. Hemp, jute and polypropylene twine shall have a minimum breaking strength of 40 pounds and shall conform to T-R-650, T-T-911 and T-T-1613 as applicable. The broom handles shall be securely fastened together with a 16-gage wire which shall be looped around at least one of the handles to prevent slipping. The broom bodies shall be covered by wrapping or by drawing a presewn skirt or tubing, with seamed top, down over the handles onto the broom bodies. Material used for the covering shall be either osnaburg cotton conforming to CCC-C-429, class 3, or burlap conforming to CCC-C-467, class 1. The skirt or tubing shall be closed by sewing with 16-ply twine conforming to T-T-871 or by gathering together and securing with two wire ties. The stitches shall be approximately 1 inch to 1-1/2 inches in length and each stitch shall be knotted. The wire ties shall be fabricated from 15-gage soft iron or steel with a 1/2 inch diameter eye at each end. The covering shall be effected in a manner that shall preclude its loss in transit or storage (see figure 1).

5.1.1.2 Boxing. Twelve brooms shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant, grade V3c, V3s or V4s, style FOL. In packing, the broom bodies and handles shall be alternately reversed. The sides of the box shall be ventilated with form slots one-fourth of an inch wide by 2 inches long in each side. The slots shall be positioned in pairs, with one pair 18 inches from each end and the second pair 21 inches from each end. The box shall be closed and sealed in accordance with the appendix to PPP-B-636.

5.1.2 Level B. The brooms shall be packed as specified in 5.1.2.1 or 5.1.2.2 (see 6.2).

5.1.2.1 Bundling. Twelve brooms shall be bundled in accordance with 5.1.1.1.

5.1.2.2 Boxing. Twelve brooms shall be packed in a close-fitting box conforming to PPP-B-636, class domestic, grade 275, style FOL. In packing, the broom bodies and handles shall be alternately reversed. The sides of the box shall be vented as specified in 5.1.1.2. The box shall be closed and sealed in accordance with the appendix to PPP-B-636.

5.1.3 Level C. The brooms shall be packed in containers that will assure carrier acceptance and safe arrival at destination in compliance with the Uniform Freight Classification rules and the National Motor Freight Classification rules.

5.2 Marking. Marking shall be in accordance with 5.2.1 or 5.2.2 as specified (see 6.2).

5.2.1 Civil agencies. In addition to any special marking required by the contract or order, shipments shall be marked in accordance with Fed. Std. No. 123.

5.2.2 Military Activities. In addition to any special marking required by contract or order, interior package and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Type I - hearth and parlor brooms are intended primarily for light duty sweeping indoors. Type II - warehouse brooms are intended primarily for heavy duty sweeping of large areas with rough, uneven floor surfaces.

6.2 Ordering data. Purchasers should exercise any options offered herein and procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type and size of broom required (1.2.1).
(c) When broom dye is not permissible (3.1.4).
(d) Species of wood required when not optional.
(e) Applicable level of packing (5.1.1).

6.3 Detailed definition of items for broomcorn used in this specification are contained in U. S. Department of Agriculture publication "U. S. Standards for broomcorn".

6.4 For information regarding ramin wood, see U. S. Forest Service Research Note FPL 0172, September 1967, "Seasoning and Handling of Ramin," by John M. McMillen, Technologist, Forest Products Service, U. S. Department of Agriculture, Madison, Wisconsin 53705.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.


Civil Agency Coordinating Activities:

GSA
FSS

JUSTICE
FPI

DOD coordination waived.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

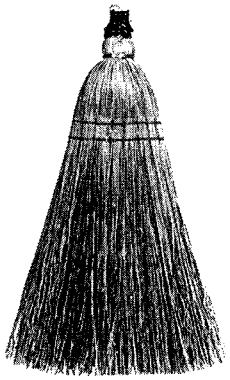

a. Hearth broom



b. Parlor broom

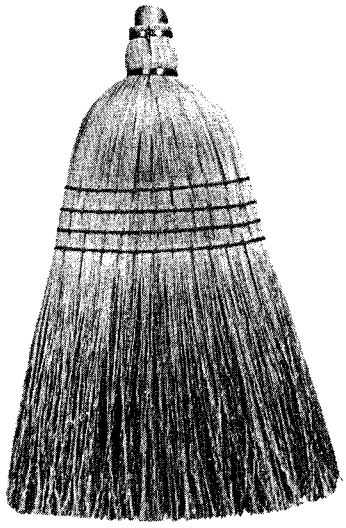

c. Warehouse broom

Figure 1. Upright brooms (corn)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.

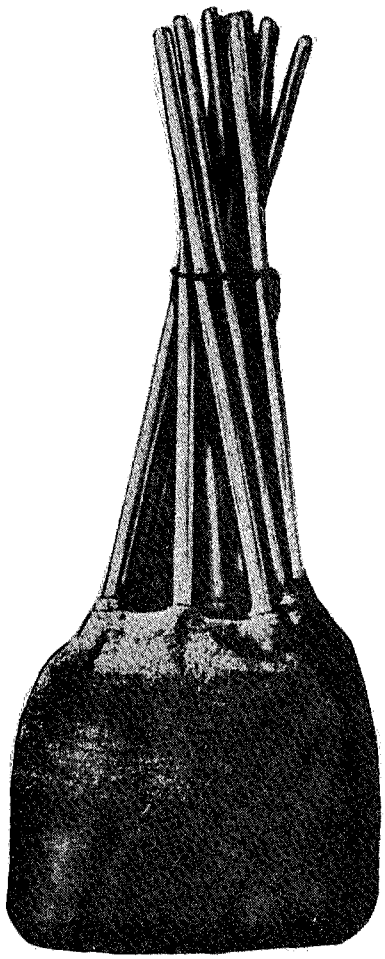


Figure 2. Broom bundle

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:06Z
Check the source to verify that this is the current version before use.