MIL - STD - 1348
30 July 1969

MILITARY STANDARD

KNOBS, CONTROL

SELECTION OF

FSC 5355

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, D. C. 20360

Control knobs; Selection of

MIL-STD-

1. This Military Standard is mandatory for use by all Departments and Agencies of the Department of Defense.

2. Recommended corrections, additions, or deletions should be addressed to:

Commander, Naval Electronic Systems Command,
ATTN: Code 0517
Department of the Navy
Washington, D. C. 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

FOREWORD

This standard provides selected standard control knobs for use in the design of military equipment.

Additional sections of this standard will be developed as the standard control knobs of a given specification family are selected and coordinated with the three Military Departments.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

CONTENTS

			PAGE
Paragraph	1.	SCOPE	1
	1.1	Scope	1
	1.2	Purpose	1
	2.	REFERENCED DOCUMENTS	1
	3.	DEFINITIONS	2
	3.1	Definitions	2
	4.	GENERAL REQUIREMENTS	2
	4.1	Choice of control knobs	2
	4.2	Item identification	2
	4.3	Conflict of requirements	2
	4.4	Criteria for inclusion in this standard	2
	5.	DETAILED REQUIREMENTS	2
		CROSS REFERENCE	3

FIGURES

Figure	1	Typical round knob	4
	2	Typical round ring skirt knob	5
	3	Typical round dial skirt knob	6
	4	Typical round concentric knob	7
	5	Typical round concentric ring skirt knob	8
	6	Typical round concentric dial skirt knob	9
	7	Typical knob lock pointer knob	10
	8	Typical round bar knob	11
	9	Typical round bar ring skirt knob	12
	10	Typical round bar dial skirt knob	13
	11	Typical round bar concentric knob	14
	12	Typical round bar concentric ring skirt knob	15
	13	Typical round bar concentric dial skirt knob	16
	14	Typical pointer knob	17
	15	Typical pointer ring skirt knob	18
	16	Typical pointer tactile knob	19
	17	Typical pointer ring skirt tactile knob	20
	18	Typical bar knob (styles A, W, and XX)	21
	19	Typical bar dial skirt knob	22
	20	Typical bar anti-parallax knob	23
	21	Typical bar anti-parallax dial skirt knob	24
	22	Typical bar knob (style R)	25
	23	Typical spinner knob	26
	24	Typical spinner slip clutch knob	27
	25	Typical spinner slip clutch tactile knob	28
	26	Typical spinner tactile knob	29
	27	Typical round tactile knob	30
	28	Typical round ring skirt tactile knob	31
	29	Typical round dial skirt tactile knobs	32
	30	Tactile forms	33
	31	Typical knob locks	35
	32	Crank-knob assembly	36
	33	Typical knob control symmetrical bar metal	37
	34	Typical knob control bar metal	38

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

CONTENTS (Continued)

PAGE

TABLES

Table	I	Round knobs	4
	II	Round ring skirt knobs	5
	III	Round dial skirt knobs	6
	IV	Round concentric knobs	7
	V	Round concentric ring skirt knobs	8
	VI	Round concentric dial skirt knobs	9
	VII	Knob lock pointer knobs	10
	VIII	Round bar knobs	11
	IX	Round bar ring skirt knobs	12
	X	Round bar dial skirt knobs	13
	XI	Round bar concentric knobs	14
	XII	Round bar concentric ring skirt knobs	15
	XIII	Round bar concentric dial skirt knobs	16
	XIV	Pointer knobs	17
	XV	Pointer ring skirt knobs	18
	XVI	Pointer tactile knobs	19
	XVII	Pointer ring skirt tactile knobs	20
	XVIII	Bar knobs (styles A, W, and XX)	21
	XIX	Bar dial skirt knobs	22
	XX	Bar anti-parallax knobs	23
	XXI	Bar anti-parallax dial skirt knobs	24
	XXII	Bar knobs (style R)	25
	XXIII	Spinner knobs	26
	XXIV	Spinner slip clutch knobs	27
	XXV	Spinner slip clutch tactile knobs	28
	XXVI	Spinner tactile knobs	29
	XXVII	Round tactile knobs	30
	XXVIII	Round ring skirt tactile knobs	31
	XXIX	Round dial skirt tactile knobs	32
	XXX	Tactile forms	34
	XXXI	Knob locks	35
	XXXII	Knob control symmetrical bar metal	37
	XXXIII	Knob control bar metal	38
	XXXIV	MS part numbers	39

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:45Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 Scope. This standard establishes the requirements for the selection of control knobs used in the design and manufacture of military equipment. Complete detailed requirements for control knobs listed in this standard are covered under MIL-K-3926. The MS part number and the ancillary document number shall be referenced in procurement documents for the control knobs.

1.2 Purpose.

(a) To provide equipment designers and manufacturers with lists of control knobs considered to be standard for military applications.

(b) To control and minimize the variety of control knobs used in new design by military activities in order to facilitate effective logistic support of equipment in the field; to maximize economic support of, and to concentrate improvement on, production of the control knobs listed in this standard.

(c) To provide the equipment designer or manufacturer with principal control knob characteristics taken from the Military Standard in effect at the time of issue of this standard.

(d) To provide a combined listing indicating control knob type and Federal Stock Number (FSN).

2. REFERENCED DOCUMENTS

2.1 The issues of the following documents in effect on the date of invitation for bids form a part of this standard to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-K-3926 - Knobs, Control (For Use with Electronic, Communications, and Allied Equipment).

STANDARDS

MILITARY

MS91522 - Knob, Control, Crank, Metal.
MS91524 - Knob, Control, Symmetrical Bar, Metal.
MS91525 - Knob, Control, Bar, Metal.
MS91528 - Knobs-Control, Plastic (Round, Concentric, Pointer, Spinner, Spinner Slip Clutch, Bar, Tactile, Knob Lock Pointer, and Knob Locks).

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

3.1 Definitions. The terms used in this standard are defined in MIL-K-3926.

4. GENERAL REQUIREMENTS

4.1 Choice of control knobs. The variety of control knobs used in any particular equipment shall be the minimum necessary to obtain satisfactory performance. Where more than one type of control knob may be used in a given application, consideration should be given to cost and availability.

4.2 Item identification. A type designation for any control knob referenced herein may be constructed as indicated in the example given in the applicable Military standard. The part number assignments, where applicable, shall be as specified in the individual control knob specification.

4.3 Conflict of requirements. In the event of conflict between technical requirements of control knobs described in this standard and the applicable specification, the specification shall govern.

4.4 Criteria for inclusion in this standard. The criteria for the inclusion of control knob types in this standard are as follows:

(a) The control knob shall be the best type available for general use in military equipment.

(b) Approved military specifications shall be available (see 2.1).

(c) The control knob shall have been in production and continued availability shall be reasonably certain.

5. DETAILED REQUIREMENTS

5.1 The detailed requirements for standard control knobs are contained in the applicable specification.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:45Z
Check the source to verify that this is the current version before use.

CROSS REFERENCE

(MS number to Figure number)

MS number	Figure number	Page number	Title
91528 Sheet 1	1	4	Typical Round knob
91528 Sheet 2	2	5	Typical Round ring skirt knob
91528 Sheet 3	3	6	Typical Round dial skirt knob
91528 Sheet 4	4	7	Typical Round concentric knob
91528 Sheet 5	5	8	Typical Round concentric ring skirt knob
91528 Sheet 6	6	9	Typical Round concentric dial skirt knob
91528 Sheet 7	7	10	Typical Knob lock pointer knob
91528 Sheet 8	8	11	Typical Round bar knob
91528 Sheet 9	9	12	Typical Round bar ring skirt knob
91528 Sheet 10	10	13	Typical Round bar dial skirt knob
91528 Sheet 11	11	14	Typical Round bar concentric knob
91528 Sheet 12	12	15	Typical Round bar concentric ring skirt knob
91528 Sheet 13	13	16	Typical Round bar concentric dial skirt knob
91528 Sheet 15	14	17	Typical Pointer knob
91528 Sheet 16	15	18	Typical Pointer ring skirt knob
91528 Sheet 17	16	19	Typical Pointer tactile knob
91528 Sheet 18	17	20	Typical Pointer ring skirt tactile knob
91528 Sheet 19	18	21	Typical Bar knobs (styles A, W, and XX)
91528 Sheet 20	19	22	Typical Bar dial skirt knob
91528 Sheet 21	20	23	Typical Bar anti-parallax knob
91528 Sheet 22	21	24	Typical Bar anti-parallax dial skirt knob
91528 Sheet 23	22	25	Typical Bar knobs (style R)
91528 Sheet 25	23	26	Typical Spinner knob
91528 Sheet 26	24	27	Typical Spinner slip clutch knob
91528 Sheet 27	25	28	Typical Spinner slip clutch tactile knob
91528 Sheet 28	26	29	Typical Spinner tactile knob
91528 Sheet 30	27	30	Typical Round tactile knob
91528 Sheet 31	28	31	Typical Round ring skirt tactile knob
91528 Sheet 32	29	32	Typical Round dial skirt tactile knob
91528 Sheet 33	30	33	Tactile forms
91528 Sheet 35	31	35	Typical Knob lock
91522 Sheet 1	32	36	Crank-knob assembly
91524 Sheet 1	33	37	Typical Knob control symmetrical bar metal
91525 Sheet 1	34	38	Typical Knob control bar metal

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE I - Round knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall thickness ±0.030 (.76)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Style 1/	Color 1/
0	0.500 (12.70)	0.510 (12.95)	1--1/8" round	0.405 (10.29)	0.435 (11.05)	0.026 (.66)	Round	Black
1	0.700 (17.78)	0.610 (15.50)	2--1/4" round	0.405 (10.29)	0.485 (12.32)	0.026 (.66)	Round with white dot	Gray
2	0.900 (22.86)	0.790 (20.07)	3--1/8" D flat	0.520 (13.21)	0.640 (16.26)	0.114 (2.90)	Round with fluorescent dot	Red
3	1.250 (31.75)	0.700 (17.78)	4--1/4" D flat	0.455 (11.56)	0.750 (19.05)	0.114 (2.90)	Round with phosphorescent dot	
4	1.750 (44.45)	0.850 (21.59)		0.520 (13.21)	0.750 (19.05)	0.114 (2.90)		
5	2.250 (57.15)	0.875 (22.23)		0.520 (13.21)	0.750 (19.05)	0.114 (2.90)		

1/ Style, shaft hole diameter, and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

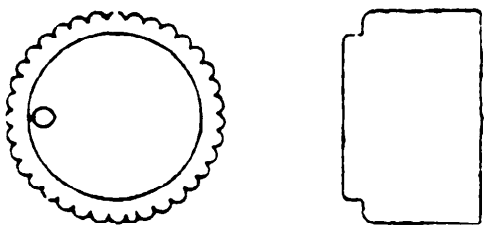


Figure 1 - Typical round knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE II - Round ring skirt knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall thickness ±0.030 (.76)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Skirt dia max	Style 1/	Color 1/
0	0.500 (12.70)	0.655 (16.64)	1--1/8" round	0.560 (14.22)	0.300 (7.62)	0.177 (4.50)	0.460 (11.68)	Skirted round	Black
1	0.700 (17.78)	0.782 (19.86)	2--1/4" round	0.568 (14.43)	0.485 (12.32)	0.188 (4.78)	0.680 (17.27)	Skirted round with white dot	Gray
2	0.900 (22.86)	1.010 (25.65)	3--1/8" D flat	0.730 (18.54)	0.640 (16.26)	0.320 (8.13)	0.845 (21.46)	Skirted round with fluorescent dot	Red
3	1.250 (31.75)	0.850 (21.59)	4--1/4" D flat	0.605 (15.37)	0.750 (19.05)	0.250 (6.35)	1.185 (30.10)	Skirted round with phosphorescent dot	
4	1.750 (44.45)	1.070 (27.18)		0.740 (18.80)	0.750 (19.05)	0.320 (8.13)	1.690 (42.93)		
5	2.250 (57.15)	1.095 (27.81)		0.740 (18.80)	0.750 (19.05)	0.320 (8.13)	2.185 (55.50)		

1/ Style, shaft hole diameter and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

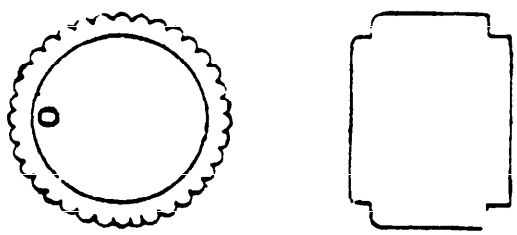


Figure 2 - Typical round ring skirt knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE III. - Round dial skirt knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall Thickness ±0.030 (.76)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Skirt dia max	Style 1/	Color 1/
0	0.500 (12.70)	0.655 (16.64)	1--1/8" round	0.560 (14.22)	0.300 (7.62)	0.177 (4.50)	0.900 (22.86)	Round dial skirt with white arrow	Black
1	0.700 (17.78)	0.782 (19.86)	2--1/4" round	0.568 (14.43)	0.485 (12.32)	0.188 (4.78)	1.150 (29.21)	Round dial skirt, no arrow	Gray
2	0.900 (22.86)	1.010 (25.65)	3--1/8" D flat	0.730 (18.54)	0.640 (16.26)	0.320 (8.13)	1.525 (38.74)	Round dial skirt with slot	Red
3	1.250 (31.75)	0.850 (21.59)	4--1/4" D flat	0.605 (15.37)	0.750 (19.05)	0.250 (6.35)	1.837 (46.66)	Round dial skirt with back-lighted white arrow	
4	1.750 (44.45)	1.070 (27.18)		0.740 (18.80)	0.750 (19.05)	0.320 (8.13)	2.468 (62.69)	Round dial skirt with fluorescent arrow	
5	2.250 (57.15)	1.095 (27.81)		0.740 (18.80)	0.750 (19.05)	0.320 (8.13)	3.020 (76.71)	Round dial skirt with phosphorescent dot	

1/ Style, shaft hole diameter, and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

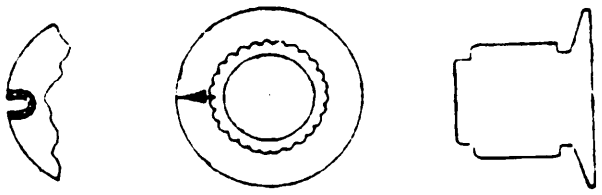


Figure 3 - Typical round dial skirt knobs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE IV - Round concentric knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall Thickness ±0.015 (.38)	Shaft hole diameter 1/	Nut clearance		Style	Color 1/	Knob form
				Dia Min	Depth Min			
1	0.700 (17.78)	0.510 (12.95)	2--1/4" round	0.485 (12.32)	0.028 (.66)	Round	Black	Concentric
2	0.900 (22.86)	0.655 (16.64)	4--1/4" D flat	0.640 (16.26)	0.114 (2.90)		Gray	
3	1.250 (31.75)	0.530 (13.46)		0.750 (19.05)	0.114 (2.90)		Red	

1/ Shaft hole diameter and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

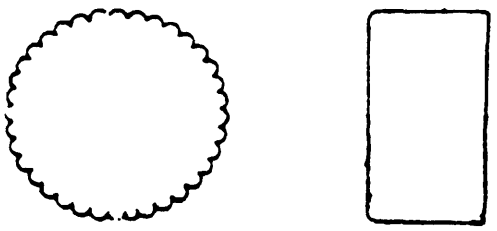


Figure 4 - Typical round concentric knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE V - Round concentric ring skirt knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall Thickness +0.025 (.64)	Shaft hole diameter 1/	Nut clearance		Skirt Dia max	Style	Color 1/	Knob form
				Dia Min	Depth Min				
1	0.700 (17.78)	0.690 (17.53)	2--1/4" round	0.485 (12.32)	0.188 (4.78)	0.680 (17.27)	Skirted round	Black	Concentric
2	0.900 (22.86)	0.885 (22.48)	4--1/4" D flat	0.640 (16.26)	0.320 (8.13)	0.845 (21.46)		Gray	
3	1.250 (31.75)	0.700 (17.78)		0.750 (19.05)	0.250 (6.35)	1.185 (30.10)		Red	

1/ Shaft hole diameter and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

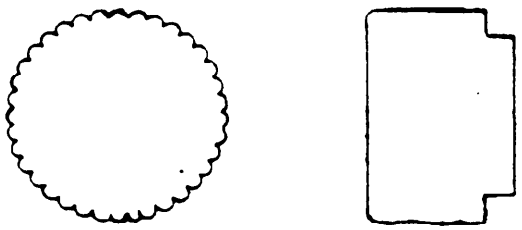


Figure 5 - Typical round concentric ring skirt knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE VI - Round concentric dial skirt knobs.

Series	Outside diameter +0.030 (.76) -0.010 (25)	Overall thickness ±0.025 (.64)	Shaft hole diameter 1/	Nut clearance		Skirt dia max	Style 1/	Color 1/	Knob form
				Dia Min	Depth Min				
1	0.700 (17.78)	0.690 (17.53)	2--1/4" round 4--1/4" D flat	0.485 (12.32)	0.188 (4.78)	1.150 (29.21)	Round dial skirt with white arrow	Black	Concentric
2	0.900 (22.86)	0.885 (22.48)		0.640 (16.26)	0.320 (8.13)	1.525 (38.74)	Round dial skirt with fluorescent arrow	Gray	
3	1.250 (31.75)	0.700 (17.78)		0.750 (19.05)	0.250 (6.35)	1.837 (46.66)	Round dial skirt with phosphorescent arrow	Red	

1/ Style, shaft hole diameter, and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

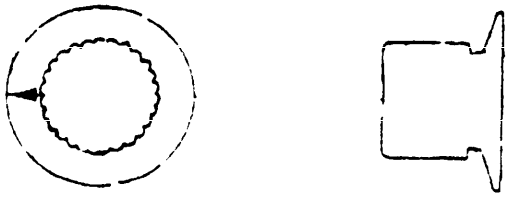


Figure 6 - Typical round concentric dial skirt knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE VII - Knob lock pointer knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall thickness +0.030 (.76)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Skirt Dia max	Pointer length (from shaft center	Style 1/	Color 1/
1	0.700 (17.78)	0.782 (19.86)	1--1/8" round	0.568 (14.43)	0.560 (14.22)	0.188 (4.78)	0.680 (17.27)	0.812 (20.62)	Round knob lock pointer with white line	Black
2	0.900 (22.86)	0.958 (24.33)	2--1/4" round	0.680 (17.27)	0.640 (16.26)	0.188 (4.78)	0.845 (21.46)	0.968 (24.59)	Round knob lock pointer with fluorescent line	Gray
3	1.250 (31.75)	0.862 (21.89)	3--1/8" D flat	0.605 (15.37)	0.750 (19.05)	0.188 (4.78)	1.185 (30.10)	1.125 (28.58)	Round knob lock pointer with phosphorescent line	Red
			4--1/4" D flat							

1/ Style, shaft hole diameter, and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

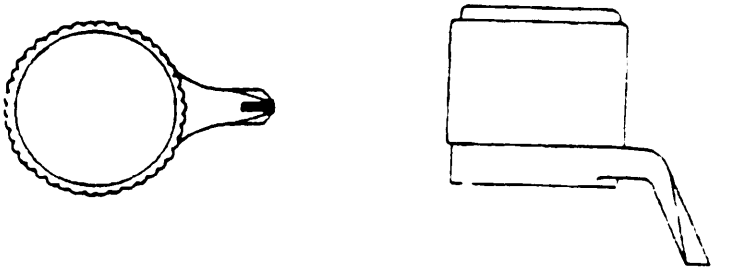


Figure 7 - Typical knob lock pointer knob.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:45Z
Check the source to verify that this is the currentversion before use.

TABLE VIII - Round bar knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall thickness ±0.030 (.76)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Dimension M ±0.025 (.64)	Style 1/	Color 1/
1	0.700 (17.78)	0.610 (15.49)	1--1/8" round 2--1/4" round 3--1/8" D flat 4--1/4" D flat	0.045 (1.14)	0.485 (12.32)	0.026 (.66)	1.150 (29.21)	Round bar with white line Round bar with fluorescent line Round bar with phosphorescent line	Black Gray Red

1/ Style, shaft hole diameter, and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

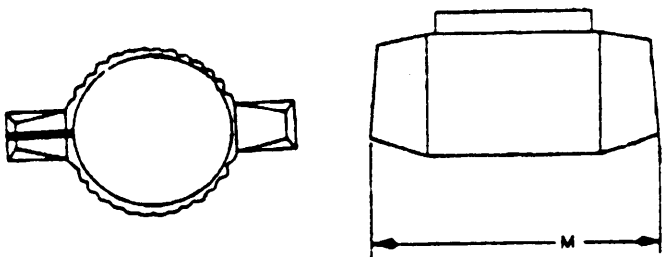


Figure 8 - Typical round bar knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE IX - Round bar ring skirt knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall thickness +0.030 (.76)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Skirt dia max	Dimension M +0.025 (.64)	Style 1/	Color 1/
1	0.700 (17.78)	0.782 (19.86)	1--1/8" round 2--1/4" round 3--1/8" D flat 4--1/4" D flat	0.568 (14.43)	0.485 (12.32)	0.188 (4.78)	0.680 (17.27)	1.150 (29.21)	Round bar ring skirted with white line Round bar ring skirted with fluorescent line Round bar ring skirted with phosphorescent line	Black Gray Red

1/ Style, shaft hole diameter, and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

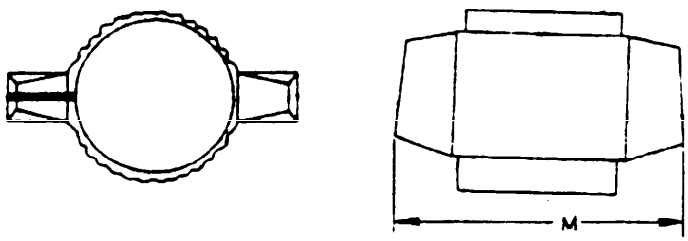


Figure 9 - Typical round bar ring skirt knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE X - Round bar dial skirt knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall thickness ±0.030 (.76)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Skirt dia max	Dimension M ±0.025 (.64)	Style 1/	Color 1/
1	0.700 (17.78)	0.782 (19.86)	1--1/8" round 2--1/4" round 3--1/8" D flat 4--1/4" D flat	0.568 (14.43)	0.485 (12.32)	0.188 (4.78)	1.150 (29.21)	1.150 (29.21)	Round bar dial skirted with white line Round bar dial skirted with fluorescent line Round bar dial skirted with phosphorescent line	Black Gray Red

1/ Style, shaft hole diameter, and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses.. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

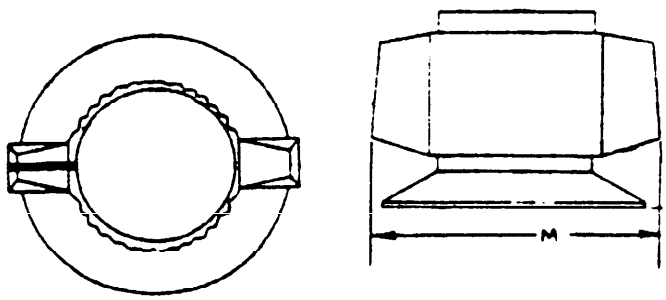


Figure 10 - Typical round bar dial skirt knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XI - Round bar concentric knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall thickness +0.015 (.38)	Shaft hole diameter 1/	Nut clearance		Dimension M ±0.025 (.64)	Style 1/	Color 1/	Knob form
				Dia Min	Depth Min				
1	0.700 (17.78)	0.510 (12.95)	2--1/4" round 4--1/4" D flat	0.485 (12.32)	0.026 (.66)	1.150 (29.21)	Round bar with white line Round bar with fluorescent line Round bar with phosphorescent line	Black Gray Red	Concentric

1/ Style, shaft hole diameter, and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

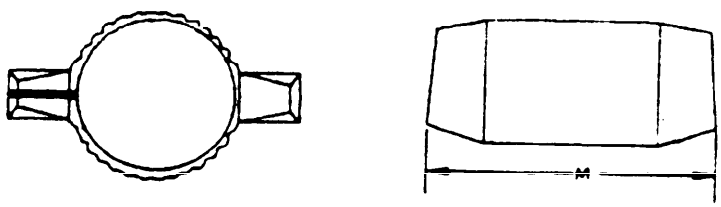


Figure 11 - Typical round bar concentric knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XII - Round bar concentric ring skirt knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall thickness ±0.025 (.64)	Shaft hole diameter 1/	Nut clearance		Skirt dia max	Dimension M ±0.025 (.64)	Style 1/	Color 1/	Knob form
				Dia Min	Depth Min					
1	0.700 (17.78)	0.690 (17.53)	2--1/4" round 4--1/4" D flat	0.485 (12.32)	0.188 (4.78)	0.680 (17.27)	1.150 (29.21)	Round bar ring skirted with white line Round bar ring skirted with fluorescent line Round bar ring skirted with phosphorescent line	Black Gray Red	Concentric

1/ Style, shaft hole diameter, and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

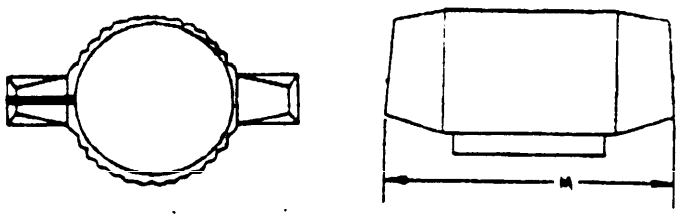


Figure 12 - Typical round bar concentric ring skirt knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XIII - Round bar concentric dial skirt knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall thickness ±0.025 (.64)	Shaft hole diameter 1/	Nut clearance		Skirt dia max	M ±0.025 (.64)	Style 1/	Color 1/	Knob form
				Dia Min	Depth Min					
1	0.700 (17.78)	0.690 (17.53)	2--1.4" round 4--1/4" D flat	0.485 (12.32)	0.188 (4.78)	1.150 (29.21)	1.150 (29.21)	Round bar dial skirted with white line Round bar dial skirted with fluorescent line Round bar dial skirted with phosphorescent line	Black Gray Red	Concentric

1/ Style, shaft hole diameter, and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

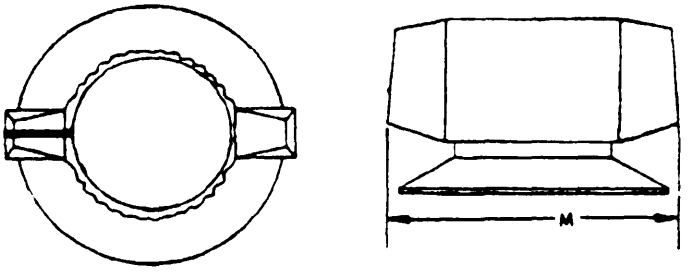


Figure 13 - Typical round bar concentric dial skirt knob.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:45Z
Check the source to verify that this is the currentversion before use.

TABLE XIV - Pointer knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall thickness +0.030 (.76)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Pointer length (from shaft center) +0.025 (.64) -0.005 (.13)	Style 1/	Color 1/
0	0.500 (12.70)	0.510 (12.95)	1--1/8" round	0.405 (10.29)	0.420 (10.67)	0.026 (.66)	0.490 (12.45)	Plain pointer	Black
1	0.700 (17.78)	0.610 (15.49)	2--1/4" round	0.405 (10.29)	0.485 (12.32)	0.026 (.66)	0.680 (17.27)	Plain pointer with white line	Gray
2	0.900 (22.86)	0.790 (20.07)	3--1/8" D flat	0.520 (13.21)	0.640 (16.26)	0.114 (2.90)	0.885 (22.48)	Plain pointer with fluorescent line	Red
			4--1/4" D flat					Plain pointer with phosphorescent line	

1/ Style, shaft hole diameter, and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

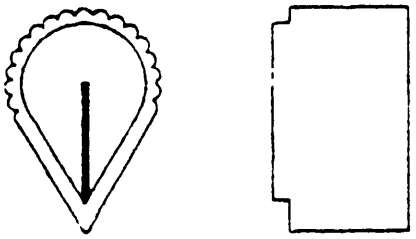


Figure 14 - Typical pointer knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XV - Pointer ring skirt knobs.

Series	Outside diameter +0.030 -0.010 (.76) (.25)	Overall thickness ±0.030 (.76)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Skirt dia max	Pointer length (from shaft center) +0.025 -0.005 (.64) (.13)	Style 1/	Color 1/
0	0.500 (12.70)	0.655 (16.64)	1--1/8" round	0.560 (14.22)	0.300 (7.62)	0.177 (4.50)	0.690 (17.53)	0.490 (12.45)	Skirted pointer	Black
1	0.700 (17.78)	0.782 (19.86)	2--1/4" round	0.568 (14.43)	0.485 (12.32)	0.188 (4.78)	1.000 (25.40)	0.680 (17.27)	Skirted pointer with white line	Gray
2	0.900 (22.86)	1.010 (25.65)	3--1/8" D flat	0.730 (18.54)	0.640 (16.26)	0.320 (8.13)	1.345 (34.16)	0.885 (22.48)	Skirted pointer with fluorescent line	Red
			4--1/4" D flat						Skirted pointer with phosphorescent line	

1/ Style, shaft hole diameter, and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

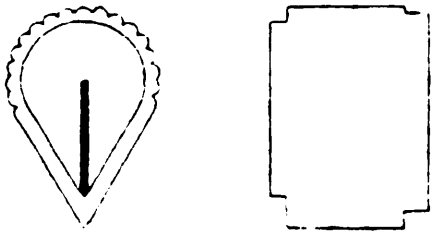


Figure 15 - Typical pointer ring skirt knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XVI - Pointer tactile knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall thickness ±0.050 (1.27)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Pointer length (from shaft center) +0.025 (.64) -0.005 (.13)	Style	Color 1/	Tactile form
1	0.700 (17.78)	0.900 (22.86)	1--1/8" round	0.405 (10.29)	0.485 (12.32)	0.026 (.66)	0.680 (17.27)	Plain pointer (P)	Black	Form 7
2	0.900 (22.86)	1.155 (29.34)	2--1/4" round	0.520 (13.21)	0.640 (16.26)	0.114 (2.90)	0.885 (22.48)		Gray	
			3--1/8" D flat						Red	
			4--1/4" D flat							

1/ Shaft hole diameter and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

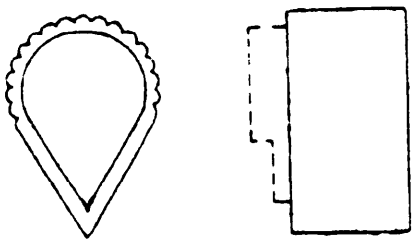


Figure 16 - Typical pointer tactile knob.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XVII - Pointer ring skirt tactile knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall thickness +0.050 (1.27)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Skirt dia max	Pointer length (from shaft center) +0.015 (.38) -0.005 (.13)	Style	Color 1/	Tactile form
1	0.700 (17.78)	1.075 (27.31)	1--1/8" round	0.568 (14.43)	0.485 (12.32)	0.188 (4.78)	1.000 (25.40)	0.680 (17.27)	Skirted pointer (K)	Black	Form 7
2	0.900 (22.86)	1.375 (34.93)	2--1/4" round	0.730 (18.54)	0.440 (11.18)	0.320 (8.13)	1.345 (34.16)	0.885 (22.48)		Gray	
			3--1/8" D flat							Red	
			4--1/4" D flat								

1/ Shaft hole diameter and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

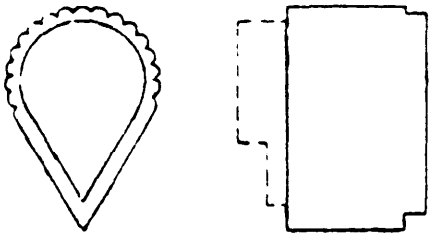

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XVIII - Bar knobs (Styles A, W, and XX).

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall thickness +0.015 −(.38)	Shaft hole diameter 1/	Shaft clearance Min	Nut clearance Dia Min	Nut clearance Depth Min	Pointer length (from shaft center) max	Dimension M Max	Style 1/	Color 1/
1	0.700 (17.78)	0.645 (16.38)	2--1/4" round 4--1/4"D flat	0.445 (11.30)	0.515 (13.08)	0.110 (2.79)	0.575 (14.61)	1.515 (38.48)	Bar with white line Bar with fluorescent line Bar with phosphorescent line	Black Gray Red

1/ Style, shaft hole diameter, and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

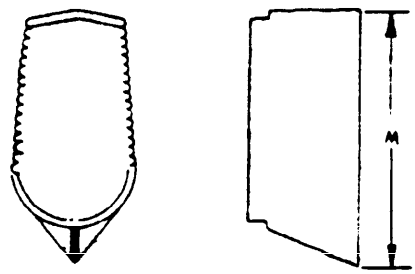


Figure 18 - Typical bar knobs (Styles A, W, and XX).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XIX - Bar dial skirt knobs.

Series	Outside diameter max	Overall thickness ±0.025 (.64)	Shaft hole diameter 1/	Shaft clearance Min	Nut clearance Dia Min	Nut clearance Depth Min	Pointer length (from shaft center) max	Dimension M Max	Style 1/	Color 1/
1	1.520 (38.61)	0.815 (20.70)	2--1/4" round 4--1/4" D flat	0.590 (14.99)	0.515 (13.08)	0.268 (6.76)	0.780 (19.81)	1.720 (43.69)	Dial skirted bar with white line and white arrow Dial skirted bar with white line and slot Dial skirted bar with white line and translucent arrow Dial skirted bar with fluorescent line and fluorescent arrow Dial skirted bar with fluorescent line and slot Dial skirted bar with fluorescent line and translucent arrow Dial skirted bar with phosphorescent line and phosphorescent arrow Dial skirted bar with phosphorescent line and slot Dial skirted bar with phosphorescent line and translucent arrow	Black Gray Red

1/ Style, shaft hole diameter, and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

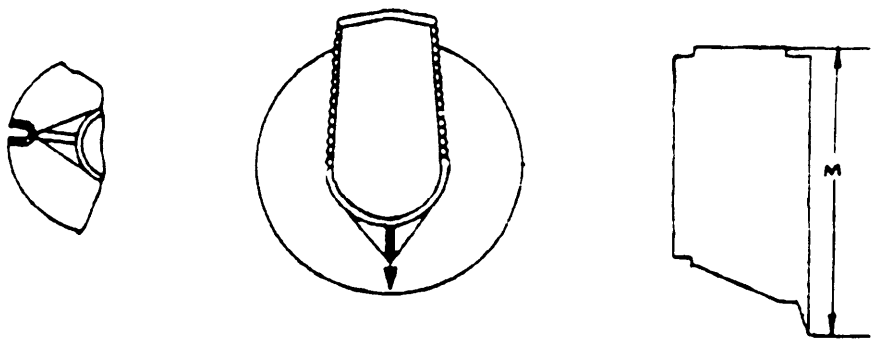


Figure 19 - Typical bar dial skirt knobs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XX - Bar anti-parallax knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	Overall thickness ±0.015 (.38)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Pointer length (from shaft center) max	Dimension M Max	Style 1/	Color 1/
2	0.700 (17.78)	0.645 (16.39)	2--1/4" round 4--1/4" D flat	0.445 (11.30)	0.595 (15.11)	0.110 (2.79)	0.900 (22.86)	1.855 (47.12)	Bar with white line Bar with fluorescent line Bar with phosphorescent line	Black Gray Red

1/ Style, shaft hole diameter, and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

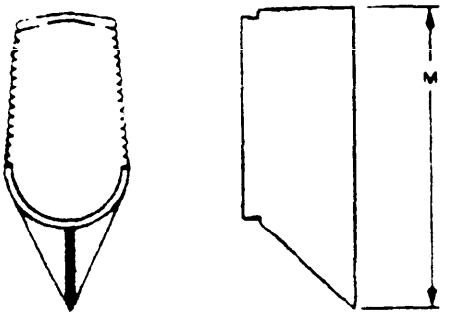


Figure 20 - Typical bar anti-parallax knob.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XXI - Bar anti-parallax dial skirt knobs.

Series	Outside diameter max	Overall thickness +0.025 -(.64)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Pointer length (from shaft center) max	Dimension M Max	Style 1/	Color 1/
2	1.520 (38.61)	0.815 (20.70)	2--1/4" round 4--1/4" D flat	0.590 (14.99)	0.470 (11.94)	0.266 (6.76)	0.915 (23.24)	1.870 (47.50)	Dial skirted bar with white line Dial skirted bar with fluorescent line Dial skirted bar with phosphorescent line	Black Gray Red

1/ Style, shaft hole diameter, and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

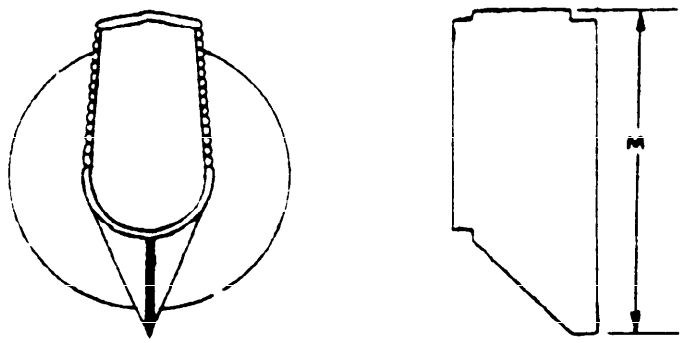


Figure 21 - Typical bar anti-parallax dial skirt knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XXII - Bar knobs (Style R)

Series	Outside diameter Max.	Overall thickness Max	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance		Pointer length (from shaft center) max	Dimension M Max	Style	Color 1/
					Dia Min	Depth Min				
3	0.788 (20.02)	0.869 (22.07)	2--1/4" round 4--1/4" D flat	0.739 (18.77)	0.562 (14.27)	0.177 (4.50)	1.290 (32.77)	2.552 (64.82)	Bar	Black Gray Red

1/ Shaft hole diameter and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

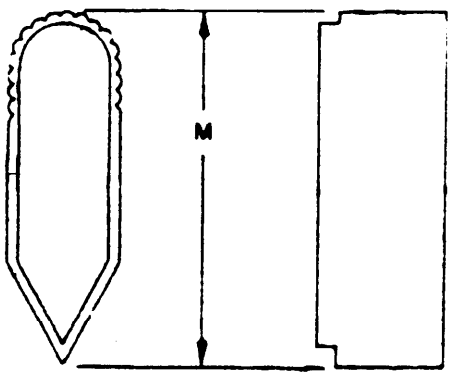


Figure 22 - Typical bar knob (Style R).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XXIII - Spinner knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	M ±0.050 (1.27)	F ±0.030 (.76)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Skirt dia max	N ±0.025 (.64)	P ±0.015 (.38)	Style	Color 1/
3	1.250 (31.75)	1.350 (34.29)	0.850 (21.59)	2--1/4" round	0.605 (15.37)	0.685 (17.40)	0.250 (6.35)	1.185 (30.10)	0.580 (14.73)	0.800 (20.32)	Spinner	Black
4	1.750 (44.45)	1.758 (44.65)	1.070 (27.18)	4--1/4" D flat	0.740 (18.80)	0.685 (17.40)	0.320 (8.13)	1.690 (42.93)	0.780 (19.81)	1.094 (27.79)		Gray
5	2.250 (57.15)	1.782 (45.26)	1.095 (27.81)		0.740 (18.80)	0.685 (17.40)	0.320 (8.13)	2.185 (55.50)	0.780 (19.81)	1.344 (34.14)		Red

1/ Shaft hole diameter and color optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

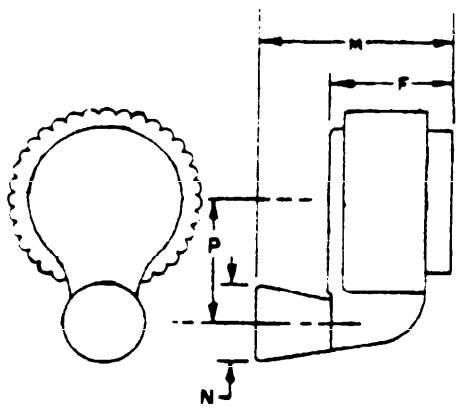


Figure 23 - Typical spinner knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XXIV - Spinner slip clutch knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	M ±0.050 (1.27)	F ±0.030 (.76)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Skirt dia max	N ±0.025 (.64)	P ±0.015 (.38)	Style	Color 1/	Slipping torque 1/
3	1.250 (31.75)	1.350 (34.29)	0.850 (21.59)	2--1/4" round	0.600 (15.24)	0.685 (17.40)	0.105 (2.67)	1.185 (30.10)	0.580 (14.73)	0.800 (20.32)	Spinner slip clutch	Black	2.0 in-lbs ±0.5
4	1.750 (44.45)	1.758 (44.65)	1.070 (27.18)	4--1/4" D flat	0.740 (18.80)	0.685 (17.40)	0.200 (5.08)	1.690 (42.93)	0.780 (19.81)	1.094 (27.79)		Gray	4.0 in-lbs ±0.5
5	2.250 (57.15)	1.782 (45.26)	1.095 (27.81)		0.740 (18.80)	0.685 (17.40)	0.200 (5.08)	2.185 (55.50)	0.780 (19.81)	1.344 (34.14)		Red	6.0 in-lbs ±0.5

1/ Shaft hole diameter, color, and slipping torque optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

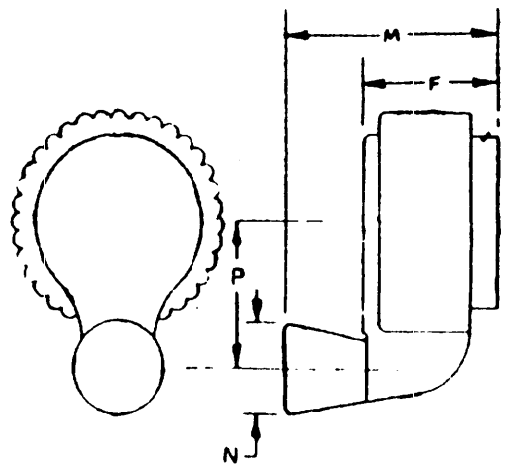


Figure 24 - Typical spinner slip clutch knob.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XXV - Spinner slip clutch tactile knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	M ±0.050 (1.27)	F ±0.030 (.76)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Skirt dia max	N Ref	P ±0.015 (.38)	Style	Color 1/	Slipping torque 1/	Tactile form 1/
3	1.250 (31.75)	1.475 (37.47)	0.850 (21.59)	2--1/4" round	0.600 (15.24)	0.685 (17.40)	0.105 (2.67)	1.185 (30.10)	0.860 (21.84)	0.800 (20.32)	Spinner slip clutch (SC)	Black	2.0 in-lbs ±0.5	Form 8
4	1.750 (44.45)	1.940 (49.28)	1.070 (27.18)	4--1/4 D flat	0.740 (18.80)	0.685 (17.40)	0.200 (5.08)	1.690 (42.93)	1.187 (30.15)	1.094 (27.79)		Gray	4.0 in-lbs ±0.5	Form 9
5	2.250 (57.15)	1.970 (50.04)	1.095 (27.81)		0.740 (18.80)	0.685 (17.40)	0.200 (5.08)	2.185 (55.50)	1.187 (30.15)	1.344 (34.14)		Red	6.0 in-lbs ±0.5	

1/ Shaft hole diameter, color, slipping torque, and tactile form optional.

26

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

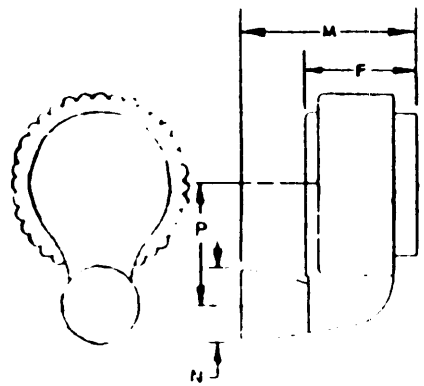


Figure 25 - Typical spinner slip clutch tactile knob.

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XXVI - Spinner tactile knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	M ±0.050 (1.27)	F ±0.030 (.76)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Skirt dia max	N Ref	P ±0.015 (.38)	Style	Color 1/	Tactile form 1/
3	1.250 (31.75)	1.475 (37.47)	0.850 (21.59)	2--1/4" round	0.605 (15.37)	0.685 (17.40)	0.250 (6.35)	1.185 (30.10)	0.860 (21.84)	0.800 (20.32)	Spinner (S)	Black	Form 8
4	1.750 (44.45)	1.940 (49.28)	1.070 (27.18)	4--1/4 D flat	0.740 (18.80)	0.685 (17.40)	0.320 (8.13)	1.690 (42.93)	1.187 (30.15)	1.094 (27.79)		Gray	Form 9
5	2.250 (57.15)	1.970 (50.04)	1.095 (27.81)		0.740 (18.80)	0.685 (17.40)	0.320 (8.13)	2.185 (55.50)	1.187 (30.15)	1.344 (34.14)		Red	

1/ Shaft hole diameter, color, and tactile form optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

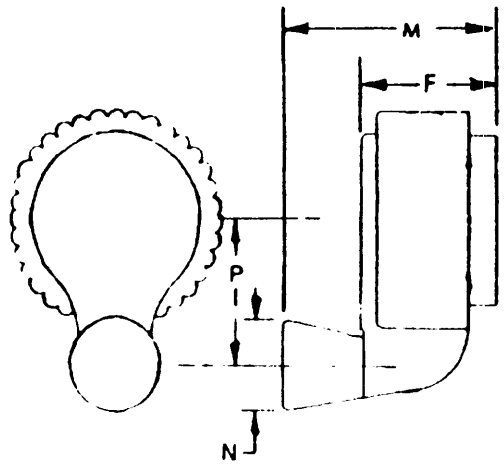


Figure 26 - Typical spinner tactile knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XXVII - Round tactile knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	F ±0.050 (1.27)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Style	Color 1/	Tactile form 1/
1	0.700 (17.78)	0.906 (23.01)	1--1/8" round	0.405 (10.29)	0.485 (12.32)	0.026 (.66)	Round (N)	Black	Form 1
2	0.900 (22.86)	1.156 (29.36)	2--1/4" round	0.520 (13.21)	0.640 (16.26)	0.114 (2.90)		Gray	Form 2
3	1.250 (31.75)	1.220 (30.99)	3--1/8" D flat	0.455 (11.56)	0.750 (19.05)	0.114 (2.90)		Red	Form 3
			4--1/4" D flat						Form 4
									Form 5
									Form 6

1/ Shaft hole diameter, color, and tactile form optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

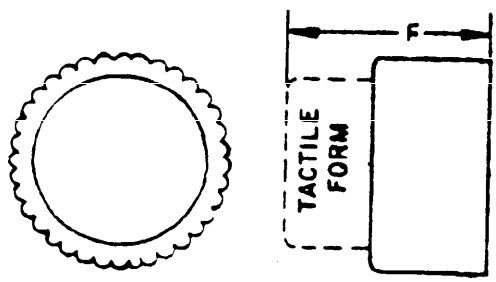


Figure 27 - Typical round tactile knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XXVIII - Round ring skirt tactile knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	F ±0.050 (1.27)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Skirt dia max	Style	Color 1/	Tactile form 1/
1	0.700 (17.78)	1.075 (27.31)	1--1/8" round	0.568 (14.43)	0.485 (12.32)	0.188 (4.78)	0.680 (17.27)	Skirted round, plain (D)	Black	Form 1
2	0.900 (22.86)	1.375 (34.93)	2--1/4" round	0.730 (18.54)	0.640 (16.26)	0.320 (8.13)	0.845 (21.46)		Gray	Form 2
3	1.250 (31.75)	1.375 (34.93)	3--1/8" D flat	0.605 (15.37)	0.750 (19.05)	0.250 (6.35)	1.185 (30.10)		Red	Form 3
			4--1/4" D flat							Form 4
										Form 5
										Form 6

1/ Shaft hole diameter, color, and tactile form optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

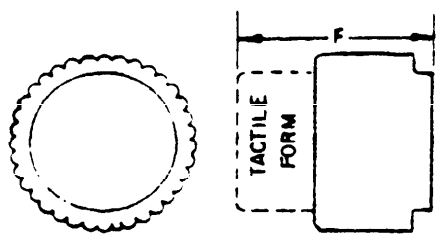


Figure 28 - Typical round ring skirt tactile knob.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XXIX - Round dial skirt tactile knobs.

Series	Outside diameter +0.030 (.76) -0.010 (.25)	F ±0.050 (1.27)	Shaft hole diameter 1/	Shaft hole depth Min	Nut clearance Dia Min	Nut clearance Depth Min	Skirt dia max	Style 1	Color 1	Tactile form 1
1	0.700 (17.78)	1.075 (27.31)	1--1/8" round	0.568 (14.43)	0.485 (12.32)	0.188 (4.78)	1.150 (29.21)	Round dial skirt with white arrow (F)	Black	Form 1
2	0.900 (22.86)	1.375 (34.93)	2--1/4" round	0.730 (18.54)	0.640 (16.26)	0.320 (8.13)	1.525 (38.74)	Round dial skirt, no arrow (G)	Gray	Form 2
3	1.250 (31.75)	1.375 (34.93)	3--1/8" D flat	0.605 (15.37)	0.750 (19.05)	0.250 (6.35)	1.837 (46.66)	Round dial skirt with slot (H)	Red	Form 3
			4--1/4" D flat					Round dial skirt with back-lighted white arrow (O)		Form 4
								Round dial skirt with fluorescent arrow (O)		Form 5
								Round dial skirt with phosphorescent arrow (OO)		Form 6

1/ Style, shaft hole diameter, color, and tactile form optional.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.



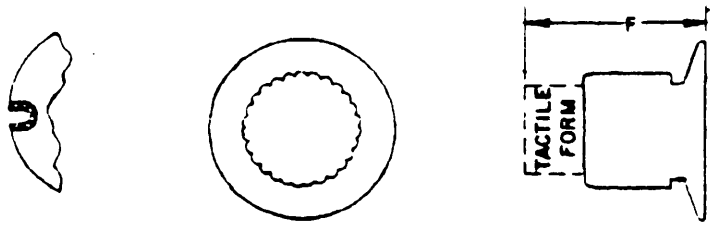


Figure 29 - Typical round dial skirt tactile knobs.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

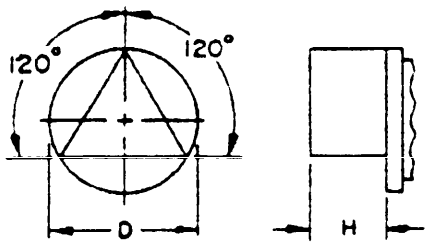


INTENSITY – BLUE NO. 35109
TACTILE FORM NO. 1

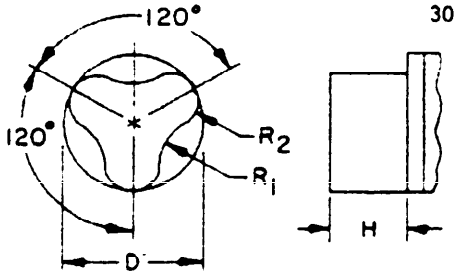


TUNE – ORANGE NO. 32246
TACTILE FORM NO. 2

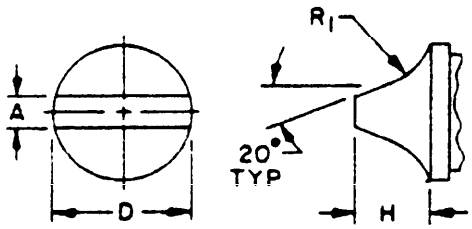


DIMMER – WHITE NO. 37875
TACTILE FORM NO. 3

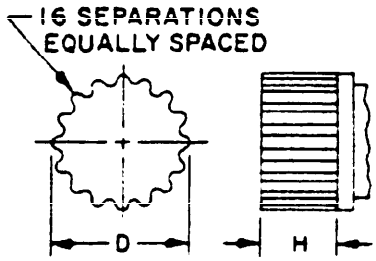


GAIN – RED NO. 31136
TACTILE FORM NO. 4

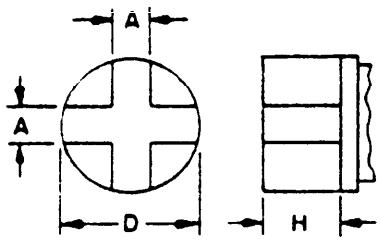


FOCUS – VIOLET NO. 37144
TACTILE FORM NO. 5

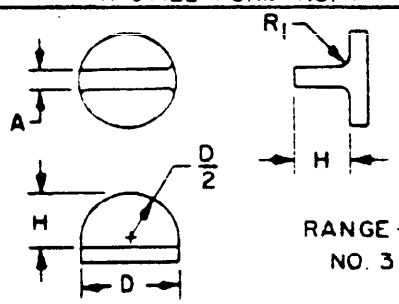


RANGE – YELLOW
NO. 33695
TACTILE FORM NO. 6



RANGE – YELLOW NO. 33695
TACTILE FORM NO. 7

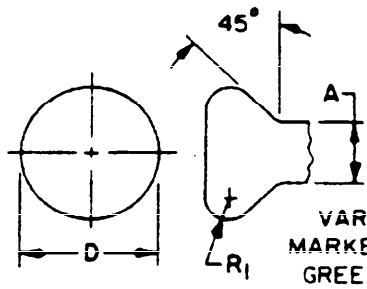

VARIABLE RANGE
MARKER OR STROBE
GREEN NO. 34108
TACTILE FORM NO. 8

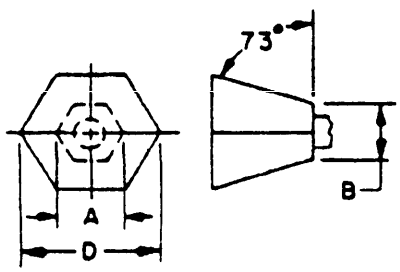

BEARING – GRAY NO. 36231
TACTILE FORM NO. 9

FIGURE 30. Tactile forms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XXX - Tactile forms.

Tactile form No.	Used on knob style	Applicable to knob size	Dimensions A ±0.010 (.25)	B ±0.010 (.25)	D ±0.020 (.51)	H ±0.025 (.64)	J ±0.025 (.64)	R_1 ±0.025 (.64)	R_2 ±0.025 (.64)
1	D	1	---	---	0.630 (16.00)	0.345 (8.76)	---	---	---
	F, N, and	2	---	---	0.812 (20.62)	0.438 (11.13)	---	---	---
	G, H, O Q, QQ	3	---	---	1.156 (29.36)	0.625 (15.88)	---	---	---
2	D	1	---	---	0.630 (16.00)	0.345 (8.76)	---	0.329 (8.36)	0.158 (4.01)
	F, N, and	2	---	---	0.812 (20.62)	0.438 (11.13)	---	0.422 (10.72)	0.203 (5.16)
	G, H, O Q, QQ	3	---	---	1.156 (29.36)	0.625 (15.88)	---	0.609 (15.47)	0.281 (7.14)
3	D	1	0.136 (3.45)	---	0.630 (16.00)	0.345 (8.76)	---	0.390 (9.91)	---
	F, N, and	2	0.175 (4.45)	---	0.812 (20.62)	0.438 (11.13)	---	0.500 (12.70)	---
	G, H, O Q, QQ	3	0.250 (6.35)	---	1.156 (29.36)	0.625 (15.88)	---	0.719 (18.26)	---
4	D	1	---	---	0.630 (16.00)	0.390 (9.91)	---	---	---
	F, N, and	2	---	---	0.812 (20.62)	0.500 (12.70)	---	---	---
	G, H, O Q, QQ	3	---	---	1.156 (29.36)	0.690 (17.53)	---	---	---
5	D	1	0.166 (4.22)	---	0.630 (16.00)	0.345 (8.76)	---	---	---
	F, N, and	2	0.213 (5.41)	---	0.812 (20.62)	0.438 (11.13)	---	---	---
	G, H, O Q, QQ	3	0.302 (7.67)	---	1.156 (29.36)	0.625 (15.88)	---	---	---
6	D	1	0.162 (4.11)	---	0.630 (16.00)	0.345 (8.76)	---	0.070 (1.78)	---
	F, N, and G, H, O Q, QQ	2	0.188 (4.78)	---	0.812 (20.62)	0.438 (11.13)	---	0.125 (3.18)	---
7	P and K	1	0.162 (4.11)	---	0.630 (16.00)	0.345 (8.76)	0.630 (16.00)	---	---
		2	0.188 (4.78)	---	0.812 (20.62)	0.438 (11.13)	0.812 (20.62)	---	---
8	S	3	0.400 (10.16)	---	0.860 (21.84)	---	---	0.125 (3.18)	---
	and	4	0.560 (14.22)	---	1.187 (30.15)	---	---	0.188 (4.78)	---
	SC	5	0.560 (14.22)	---	1.187 (30.15)	---	---	0.188 (4.78)	---
9	S	3	0.400 (10.16)	0.350 (8.89)	0.860 (21.84)	---	---	---	---
	and	4	0.560 (14.22)	0.484 (12.29)	1.187 (30.15)	---	---	---	---
	SC	5	0.560 (14.22)	0.484 (12.29)	1.187 (30.15)	---	---	---	---

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XXXI - Knob locks.

Series	Outside diameter max.	Thread size		Style 1/	Thread size 1/	Color 1/
		1/4" Shaft	1/8" Shaft			
1	1.030 (26.16)	3/8-32 UNEF-2B	1/4-32 UNEF-2B	Round knob lock with white marking	1--1/4-32	Black
2	1.340 (34.04)	3/8-32 UNEF-2B	---	Round knob lock splash proof with white marking 2/	2--3/8-32	Gray
3	1.645 (41.78)	3/8-32 UNEF-2B	---	Round knob lock with fluorescent marking		Red
				Round knob lock splash proof with fluorescent marking 2/		
				Round knob lock with phosphorescent marking		
				Round knob lock splash proof with phosphorescent marking 2/		

1/ Style, thread size, and color optional.

2/ Used only with thread size No. 2 for 1/4" diameter shafts.

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

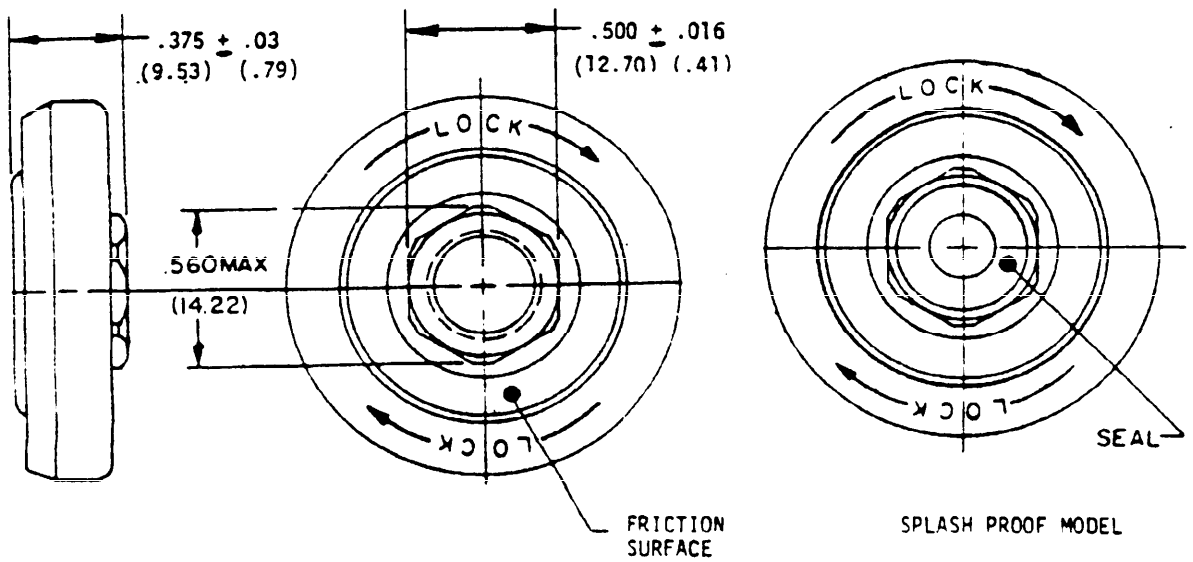


Figure 31 - Typical knob locks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.


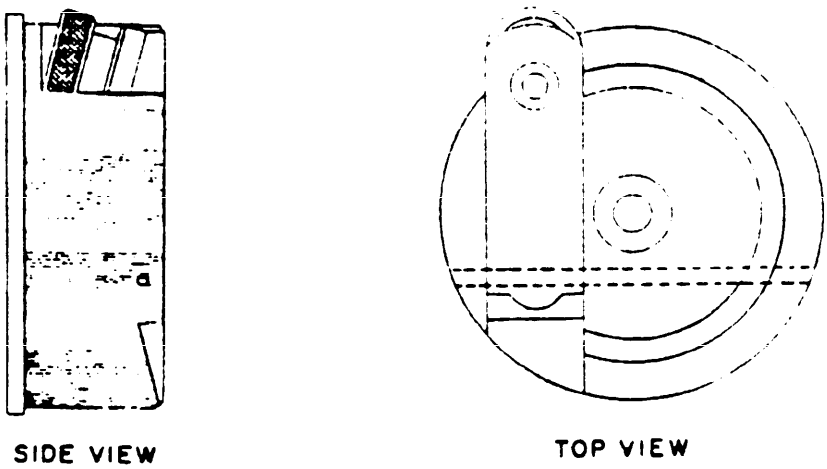


Figure 32 - Crank-knob assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XXXII - Knob control symmetrical, bar metal

Series	Knob body color	Finish-line
1	Olive	Phosphorescent
2	Olive	White
3	Black	Phosphorescent
4	Black	White
5	Gray	Phosphorescent
6	Gray	White

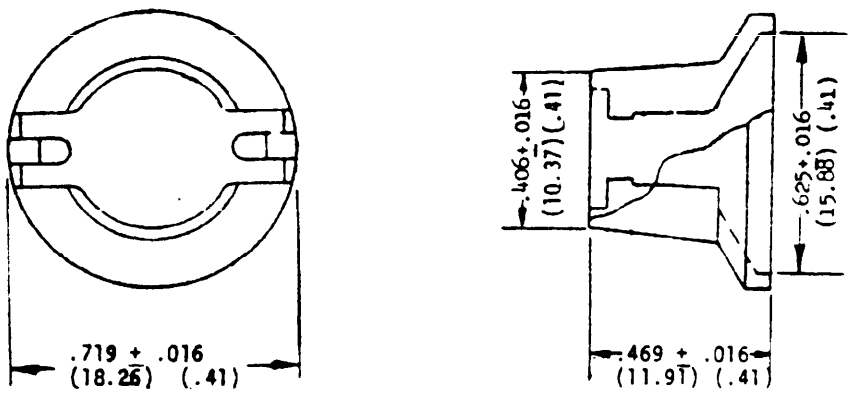

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Figure 33 - Typical knob control symmetrical, bar metal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XXXIII - Knob control bar metal.

Series	A	B	Knob finish	Bar line	Series	A	B	Knob finish	Bar line
1	.594 (15.09)	1.188 (30.18)	Olive	Phosphorescent	13	.594 (15.09)	1.188 (30.18)	Olive	White
2	.844 (21.44)	1.438 (36.53)	Olive	Phosphorescent	14	.844 (21.44)	1.438 (36.53)	Olive	White
3	1.344 (34.14)	1.938 (49.23)	Olive	Phosphorescent	15	1.344 (34.14)	1.938 (49.23)	Olive	White
4	1.969 (50.01)	2.562 (65.07)	Olive	Phosphorescent	16	1.969 (50.01)	2.562 (65.07)	Olive	White
5	.594 (15.09)	1.188 (30.18)	Black	Phosphorescent	17	.594 (15.09)	1.188 (30.18)	Black	White
6	.844 (21.44)	1.438 (36.53)	Black	Phosphorescent	18	.844 (21.44)	1.438 (36.53)	Black	White
7	1.344 (34.14)	1.938 (49.23)	Black	Phosphorescent	19	1.344 (34.14)	1.938 (49.23)	Black	White
8	1.969 (50.01)	2.562 (65.07)	Black	Phosphorescent	20	1.969 (50.01)	2.562 (65.07)	Black	White
9	.594 (15.09)	1.188 (30.18)	Gray	Phosphorescent	21	.594 (15.09)	1.188 (30.18)	Gray	White
10	.844 (21.44)	1.438 (36.53)	Gray	Phosphorescent	22	.844 (21.44)	1.438 (36.53)	Gray	White
11	1.344 (34.14)	1.938 (49.23)	Gray	Phosphorescent	23	1.344 (34.14)	1.938 (49.23)	Gray	White
12	1.969 (50.01)	2.562 (65.07)	Gray	Phosphorescent	24	1.969 (50.01)	2.562 (65.07)	Gray	White

NOTE: Dimensions are in inches. Millimeters are in parentheses. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

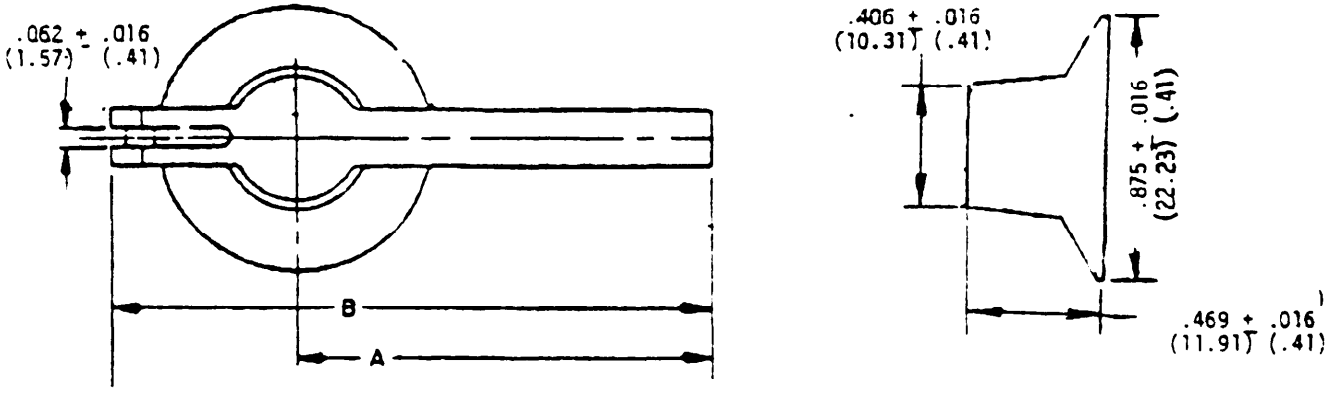


Figure 34 - Typical knob control bar metal.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:45Z
Check the source to verify that this is the current version before use.

TABLE XXXIV - MS Part numbers.

MS91528-0C1B	MS91528-1N1B	MS91528-2E2G	MS91528-3D2B1
MS91528-0D1B	MS91528-1N1B2	MS91528-2F1B	MS91528-3D2B2
MS91528-0D1G	MS91528-1N1B4	MS91528-2F2B	MS91528-3D2B3
MS91528-0F1B	MS91528-1N1B5	MS91528-2F2BC	MS91528-3D2B4
MS91528-0K1B	MS91528-1N2B	MS91528-2F2B2	MS91528-3D2B5
MS91528-0K2B	MS91528-1N2BC	MS91528-2F2B4	MS91528-3D2B9
MS91528-0N1B	MS91528-1N2B1	MS91528-2F2G	MS91528B-3D2G
MS91528-0N2G	MS91528-1N2B2	MS91528-2G2B	MS91528-3E2B
MS91528-001B	MS91528-1N2B3	MS91528-2K1B	MS91528-3F2B
MS91528-0P1B	MS91528-1N2B4	MS91528-2K1G	MS91528-3F2BC
MS91528-1A2B	MS91528-1N2B5	MS91528-2K2B	MS91528-3F2B3
MS91528-1D1B	MS91528-1N2G	MS91528-2K2B7	MS91528-3F2G
MS91528-1D1G	MS91528-101B	MS91528-2N1B	MS91528-3G2B
MS91528-1D2B	MS91528-101B1	MS91528-2N1B2	MS91528-3N2B
MS91528-1D2B1	MS91528-101B4	MS91528-2N1B3	MS91528-3N2B3
MS91528-1D2B2	MS91528-102B	MS91528-2N2B	MS91528-302B
MS91528-1D2B3	MS91528-102B1	MS91528-2N2BC	MS91528-3R2B
MS91528-1D2B4	MS91528-102B2	MS91528-2N2B1	MS91528-3S2B
MS91528-1D2B5	MS91528-102B5	MS91528-2N2B2	MS91528-3S2B8
MS91528-1D2G	MS91528-1P1B	MS91528-2N2B3	MS91528-3S2G
MS91528-1E2B	MS91528-1P2B	MS91528-2N2B4	MS91528-4D2B
MS91528-1F1B	MS91528-1P2B7	MS91528-2N2B5	MS91528-4F2B
MS91528-1F2B	MS91528-1P2G	MS91528-201B	MS91528-4N2B
MS91528-1F2B1	MS91528-2C2B	MS91528-202B	MS91528-402B
MS91528-1F2B4	MS91528-2D1B	MS91528-202B1	MS91528-4S2B
MS91528-1F2B3	MS91528-2D2B	MS91528-202B3	MS91528-4S2B9
MS91528-1F2G	MS91528-2D2BC	MS91528-202B4	MS91528-5D2B
MS91528-1G1B	MS91528-2D2B1	MS91528-202B5	MS91528-5F2B
MS91528-1G2B	MS91528-2D2B2	MS91528-2P1B	MS91528-5N2B
MS91528-1K1B	MS91528-2D2B3	MS91528-2P2B	MS91528-502B
MS91528-1K2B	MS91528-2D2B4	MS91528-2P2B7	MS91528-5S2B
MS91528-1K2B7	MS91528-2D2B5	MS91528-3C2B	MS91528-5S2B8
MS91528-1K1G	MS91528-2D1G	MS91528-3D2B	MS91528-5S2B9
MS91528-1K2G	MS91528-2D2G		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - MI, ME
Navy - OS
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - MU, WC
Navy - SH, MC, CG
Air Force - 19

Preparing activity:
Navy - EC

(Project 5355-0074)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions - Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND (ELEX 8111)
WASHINGTON, DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:45Z
Check the source to verify that this is the current version before use.