MIL-STD-1407B
17 December 1985
SUPERSEDING
MIL-STD-1407A
16 July 1975

MILITARY STANDARD

HEATERS, VEHICULAR COMPARTMENT; HEATERS, COOLANT, ENGINE; HEATERS, SPACE; HEATERS, DUCT-TYPE



AMSC N/A FSC 4520

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, DC 20301

Heaters, Vehicular Compartment; Heaters, Coolant, Engine; Heaters, Space; Heaters, Duct-Type.

10 This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Belvoir Research and Development Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

FOREWORD

This Military Standard is issued to implement Department of the Army policy specified in AR 700-115 regarding the use of only Standard Family Heaters as described herein for Field Army type application and systems, and to provide a guide to all Department of Defense users for the selection of such Standard Family Heaters. The use of this standard plays a prime role in the Military Standardization Program being carried out by the Department of Defense. The use of heaters listed herein will eliminate item duplication.

This publication includes existing heaters that constitute the Standard Family of Military Heaters and units currently under development which will be added to the Standard Family as they become available. The data sheets give BTUH output and general application characteristics available at this time.

For assistance in the use, installation, and technical data contact:

(a) Heaters, Vehicular Compartment
Commander
U. S. Army Tank - Automotive Command
ATTN: AMSTA-GBM
Warren, MI 48397-5000

(b) Heaters. Coolant. Engine
Commander
U. S. Army Tank - Automotive Command
ATTN: AMSTA-GBM
Warren, MI 48397-5000

(c) Heaters, Space (Nonblower Type)
Commander
U. S. Army Natick Research and Development Center
ATTN: STRNC–ES
Natick, MA 01760-5014

(d) Heaters, Space (Blower Type)
Comnander
U. S. Army Belvoir Research and Development Center
ATTN: STRBE-FES
Fort Belvoir, VA 22060-5606

(e) Heaters, Space, Electric
Commander
U. S. Army Belvoir Research and Development Center
ATTN: STRBE–FES
Fort Belvoir, VA 22060-5606

(f) Heaters, Duct-Type, Portable
Commander
U. S. Army Belvoir Research and Development Center
ATTN: STRBE–FES
Fort Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

CONTENTS

Paragraph			Page
1.		SCOPE	1
	1.1	Coverage	1
	1.2	Method of reference	1
2.		REFERENCED DOCUMENTS	1
	2.1	Government Documents	1
	2.1.1	Specifications, standards, handbooks	1
3.		DEFINITIONS	3
	3.1	Heaters, vehicular compartment	3
	3.2	Heaters, coolant, engine	3
	3.3	Heaters, space	3
	3.4	Heater, space, electric	3
	3.5	Heater, duct-type, portable	3
	3.6	Abbreviations	3
4.		GENERAL REQUIREMENTS	3
5.		DETAIL REQUIREMENTS	4
	5.1	Data sheets	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

FIGURES

			Page
Figure	1	Heater, Multifuel, 30,000 BTU/HR	7
	2	Heater, Multifuel, 30,000 BTU/HR; Dimensions	8
	3	Single Air Model 10560C	10
	4	Dual Air Model 10560M24	11
	5	Single Air Model MF-510A	12
	6	Dual Air Model MF510B	13
	7	Heater, Liquid Coolant Operated, 20,000 BTU/HR; Dimensions	15
	8	Heater, Liquid Coolant Operated, 30,000 BTU/HR; Dimensions	17
	9	One type of Engine Heating System, Utilizing Combustion-Heater	19
	10	Heater, Space, Multifuel, 15,000 BTU/HR; Dimensions	22
	11	Heater, Space, With Blower, 60,000 BTU/HR (Discharge Up Position)	24
	12	Heater Control Box	25
	13	Heater, Electric, 1500 Watts, Dimensions	27
	14	Heaters, Radiant Type, Portable, 45,000 BTU/HR (M-1941)	29
	15.1	Accessories (M-41)	30
	15.2	Overall Dimensions (M-41)	30
	15.3	Internal Arrangement, Liquid Fueled Type (M-41)	30
	15.4	Internal Arrangement, Coal Burning Type (M-41)	30
	16	Installation Setup of Yukon Stove	32
	17	Heater, Space, Oil-Fired, 70,000 BTU/HR (Barracks Heater)	34
	18	Heater, Space; Oil-Fired, 70,000 BTU/HR; Dimensions and Accessories (Barracks Heater)	35
	19	Heater, Duct Type, Portable, Multifuel, Self-powered, 250,000 BTUH, Wheel-Mounted	37
	20	Heater, Duct Type, Portable, 400,000 BTUH	39

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 Coverage. This standard covers the heating capacity (expressed in British Thermal Units per hour, Btuh) and general application characteristics for heaters with various capacities and operating characteristics. It covers vehicular compartment heaters, engine coolant heaters, space heaters (blower and nonblower types), (fuel and all-electric types), and portable duct-type heaters. These models comprise essentially the complete Standard Family of Military Heaters to satisfy the various requirements. Data sheets of operating and physical characteristics as presently established are presented for each heater. Information is also included on units currently under development which will be added to the Standard Family as they become available.

1.2 Method of reference. When available, a National Stock Number is given for each heater listed herein, and it should be used for referencing a particular model. Reference to models without National Stock Numbers should be made by the nomenclature listed. When it has been determined that a special nonfamily item is required, the requirement for the special item with supporting documentation should be processed in accordance with procedures contained in AR 700-115.

2. REFERENCED DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

O-A-548	- Antifreeze/Coolant, Engine: Ethylene Glycol, Inhibited, Concentrated.
O-I-490	- Inhibitor, Corrosion, Liquid Cooling System.
VV-F-800	- Fuel Oil, Diesel.
VV-G-1690	- Gasoline, Automotive, Leaded or Unleaded.

MILITARY

MIL-G-3056	- Gasoline, Automotive, Combat.
MIL-H-3177	- Heaters, Coolant, Engine: Multi-Fuel-Burning, 24-Volt DC.
MIL-H-3199	- Heaters, Vehicular Compartment 28-Volt, DC.
MIL-H-4607	- Heater, Engine and Shelter, Ground, Type H-1.
MIL-G-5572	- Gasoline, Aviation: Grades 80/87, 100/130, 115/145.
MIL-T-5624	- Turbine Fuel, Aviation, Grades JP-4 and JP-5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

MIL-H-11511	- Heater, Space: Multifuel, with Blower, 60,000 Btu/Hr.
MIL-A-11755	- Antifreeze, Arctic-Type.
MIL-H-12340	- Heater, Space, (Yukon, M-1950, with Accessories) .
MIL-H-13514	- Heaters, Space, Radiant Type, Portable, 45,000 Btu/Hr.
MIL-H-14516	- Heaters, Space: Oil-Fired 70,000 BTU Per Hour, Theater of Operations Type.
MIL-F-46162	- Fuel, Diesel, Referee Grade.
MIL-H-46792	- Heater, Vehicular Compartment: Multi.fuel Burning 24 Volt, Dc.
MIL-H-52204	- Heaters, Space: Multifuel, with Blower, 15,000 Btu/Hr.
MIL-H-52641	- Heater, Electric, 1,500 Watts, 115 Volts, AC, with Fan.
MIL-H-62315	- Heater Assembly, Combustion, Vehicular Compartment , 60,000 BTU/HR.
MIL-T-83133	- Turbine Fuel, Aviation, Kerosene Type, Grade JP-8 .

STANDARDS

MILITARY

MS 3102	- Connector, Receptacle, Electric, Box mounting.

(Copies of specifications and drawing required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

3. DEFINITIONS

For purposes of this document the following definitions apply.

3.1 Heaters, vehicular compartment. A device designed to heat the interior of a vehicle by utilizing the heat from the engine coolant system, or a liquid fuel type burner.

3.2 Heaters, coolant, engine. A heater designed to burn fuel or to utilize electric power to apply heat through direct connection to the engine coolant system to facilitate starting in low temperatures; may also supply heated coolant to heat exchanger.

3.3 Heaters, space. A device designed to burn various types of fuel within an enclosure which protects and confines the fire. It is used for the purpose of raising the temperature of the air in its immediate vicinity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

3.4 Heater, space, electric. A device having a heating element which, when connected to an electrical source, directly imparts heat.

3.5 Heater, duct type, portable. A heater equipped with integral connections for attaching flexible ducts to direct heat to equipment or spaces such as engine surfaces, railroad cars, warehouses, and tents. It is equipped with a blower, and must be mounted on skids or wheels, or be capable of being hand carried.

3.6 Abbreviations.

Btuh	- British Thermal Units per Hour - Heat required to produce a temperature rise of 1° F in 1 pound of water in 1 hour.
Hz	- (Hertz) Frequency of electrical power in cycles per second.
cfm	- Cubic feet of airflow per minute.
gal/hr	- Gallons per hour.
lbs	- Pounds.
psig	- Pounds per square inch gage.
gpm	- Gallons per minute.

4. GENERAL REQUIREMENTS

(Not applicable.)

5. DETAIL REQUIREMENTS

5.1 Data sheets. Data sheets containing detailed output and general application characteristics, and an outline sketch and photograph, when available, are included herein for each model heater (see Index).

Custodians:
Army - ME
Navy - MC
Air Force - 84

Review activities:
Army - AT, ER
DLA - CS

User activity:
Army - MI

Preparing activity:
Army - ME

Project 4520-0274

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

INDEX

INDIVIDUAL UNIT CHARACTERISTICS

Page

Heater, Vehicular Compartment
Multifuel Burning 30,000 Btuh 6
NSN 2540-00-113-4180
Multifuel Burning 60,000 Btuh 9
Dual Air
NSN 2540-01-169-5159
NSN 2540-01-162-3834
Single Air
NSN 2540-01-083-0691
NSN 2540-00-930-8938
Liquid Coolant 20,000 Btuh 14
NSN 2540-00-869-0424
Liquid Coolant 30,000 Btuh 16
NSN 2540-00-202-8591

Heater, Coolant, Engine
Multifuel Burning 15,000 Btuh 18
NSN 2990-00-927-4254
Multifuel Burning 30,000 Btuh 20
NSN 2990-00-135-6427

Heater, Space, Blower Type
Multifuel Burning 15,000 Btuh 21
NSN 4520-01-010-0316
NSN 4520-00-709-9223
NSN 4520-00-357-0518
Multifuel Burning 60,000 Btuh 23
NSN 4520-00-683-8595
Electric 5,000 Btuh. 26
NSN 4520-00-177-6198


Heater, Space, Nonblower Type
Solid and Oil Burning 45,000 Btuh 28
NSN 4520-00-257-4877
NSN 4520-00-927-4214
Gasoline Burning 60,000 Btuh 31
NSN 4520-00-287-3353
Diesel Oil Burning 70,000 Btuh 33
NSN 4520-00-540-0557

Heater, Duct Type, Portable
Multifuel Burning 250,000 Btuh (Development Item) 36
NSN 4520-01-081-0773
Gasoline Burning 400,000 Btuh 38
NSN 4520-00-203-0224

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.


Nomenclature:	Heater, Vehicular Compartment: Multifuel-Burning, 24 Volt DC, 30,000 Btuh.
Capacity	
Heat Output Btuh	
Nominal	30,000
Minimum at high setting	27,000
Low setting	15,000
Air Discharge Rate cfm	
Minimum O-inch water static pressure	115
Minimum with 0.75-inch water static pressure	80
Power Requirements	
Voltage nominal	24 dc
Voltage range	19-30
Current Maximum Start (amps)	20
Current Maximum Run (amps)	8
Frequency	Direct Current
Operating Weight Max, lbs	21
Fuel Consumption lbs/min	
High setting	0.049
Low setting	0.031
Fuels:	
Diesel fuel per specification	VV-F-800
Gasoline per specification	VV-G-1690, MIL-G-3056
Jet fuel per specification	MIL-T-5624
Control, when specified:	Manual start and stop, manual cycling from high to low setting.
National Stock Number:	2540-00-113-4180
Line Item Number:	
Specification:	MIL-H-46792

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

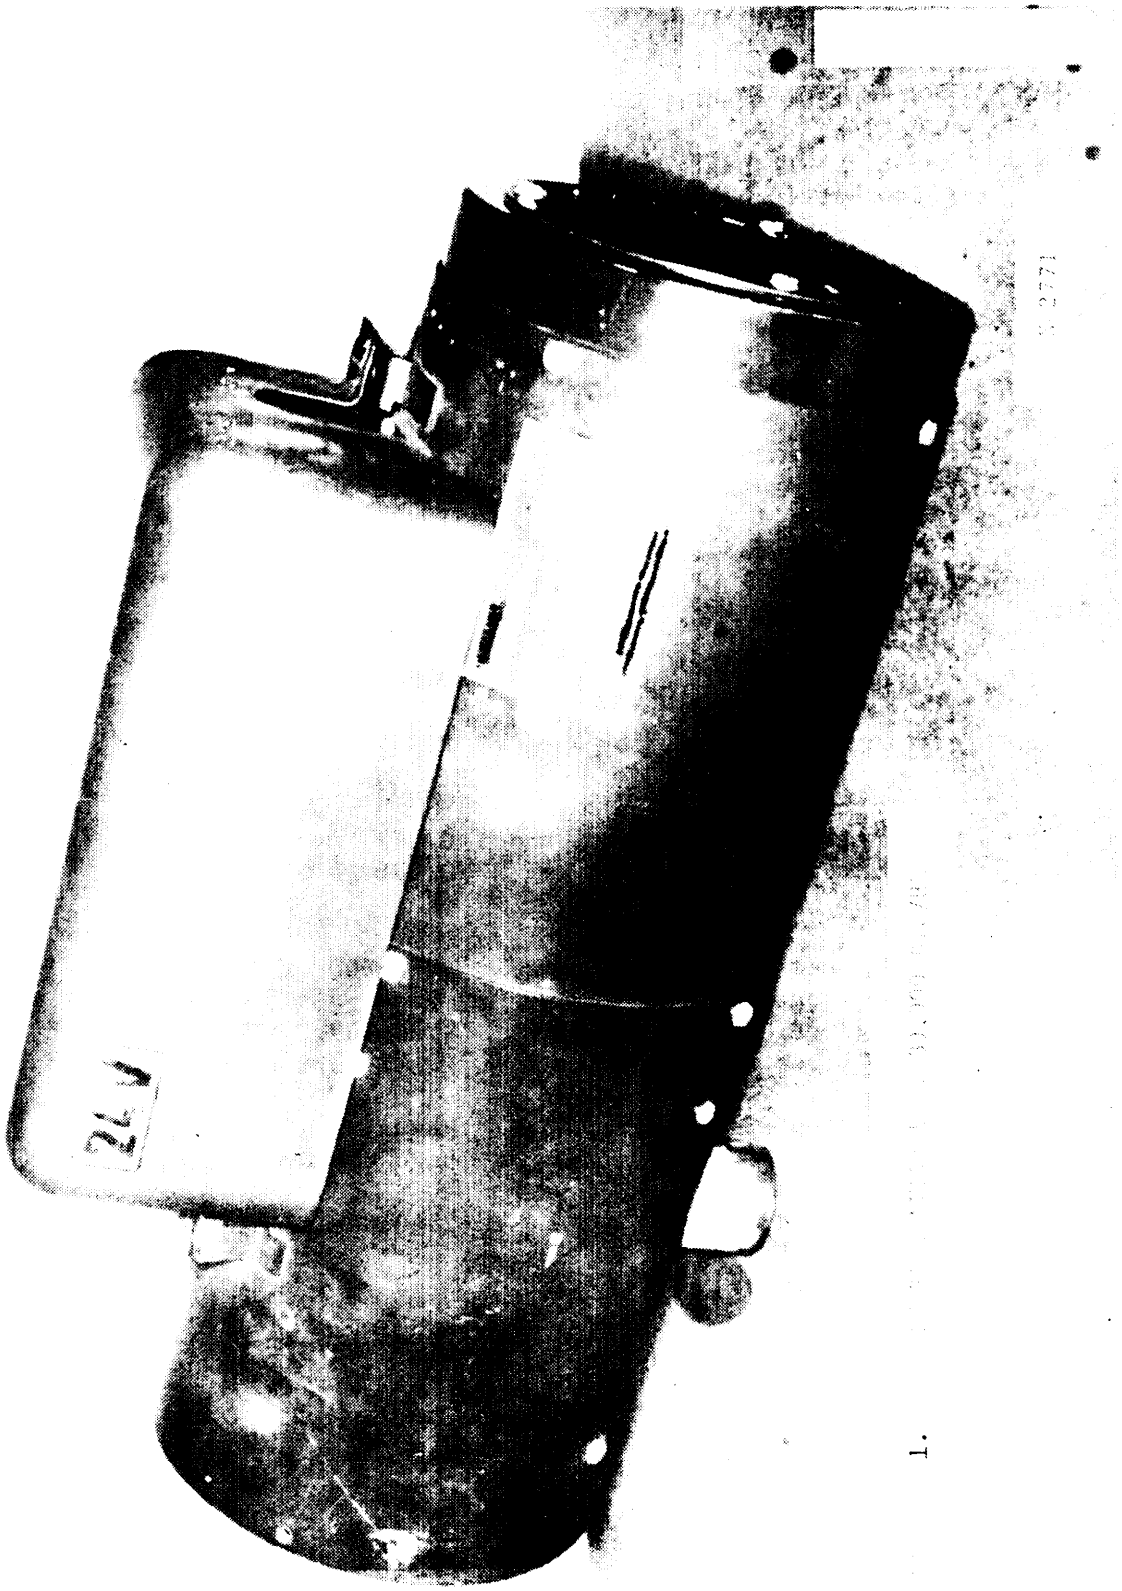

1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

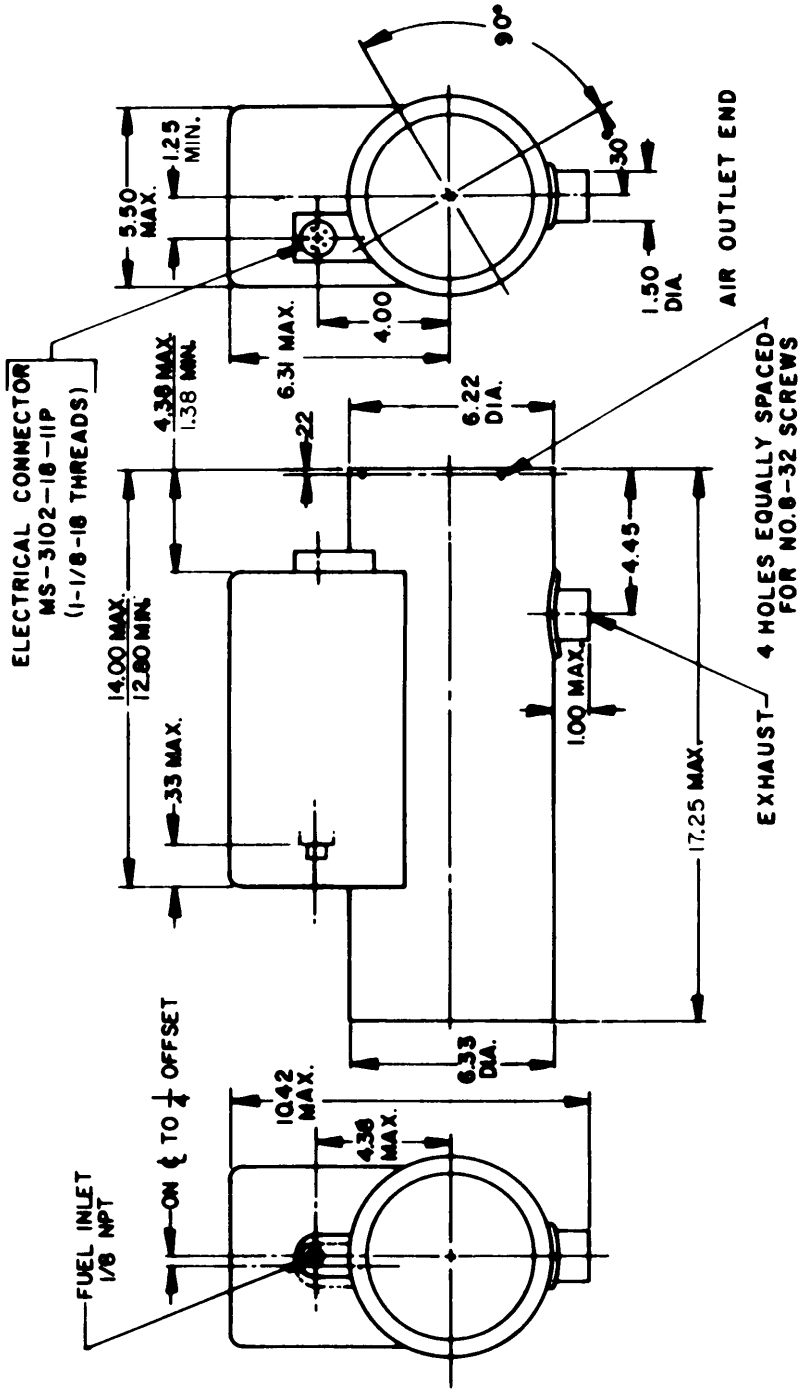

NOTE: All dimensions in inches; unless otherwise specified tolerances are ±.030 inches, ± 1/2° on angles.

FIGURE 2. HEATER, MULTIFUEL, 30,000 BTU/HR; DIMENSIONS X-2772

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

Nomenclature:	Heater, Vehicular Compartment, Multifuel, 60,000 Btuh, Single Air and Dual Air
Heat Output (Btuh)	
Nominal	60,000
Minimum at high setting	57,000
Low setting	30,000
Air Discharge Rate (cfm), minimum, with water static pressure of	
0 inches	200
1.3 inch	150
Power Requirements	
Voltage (volts)	
Nominal	24
Range	19-30
Current Max. (Amperes)	
Start	16
Run	15
Operating wt., approx., (lbs)	35
Fuel Consumption, Max. lbs/min	
High setting	0.092
Low setting	0.052
Fuels per specification	
Diesel	VV-F-800
Control	
Start and stop	Manual
Setting changes	Manual
National Stock Number	
Dual Air	2540-01-169-5159 2540-01-162-3834
Single Air	2540-01-083-0691 2540-00-930-8938
Procurement Specification	
Dual Air	MIL-H-62315
Single Air	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

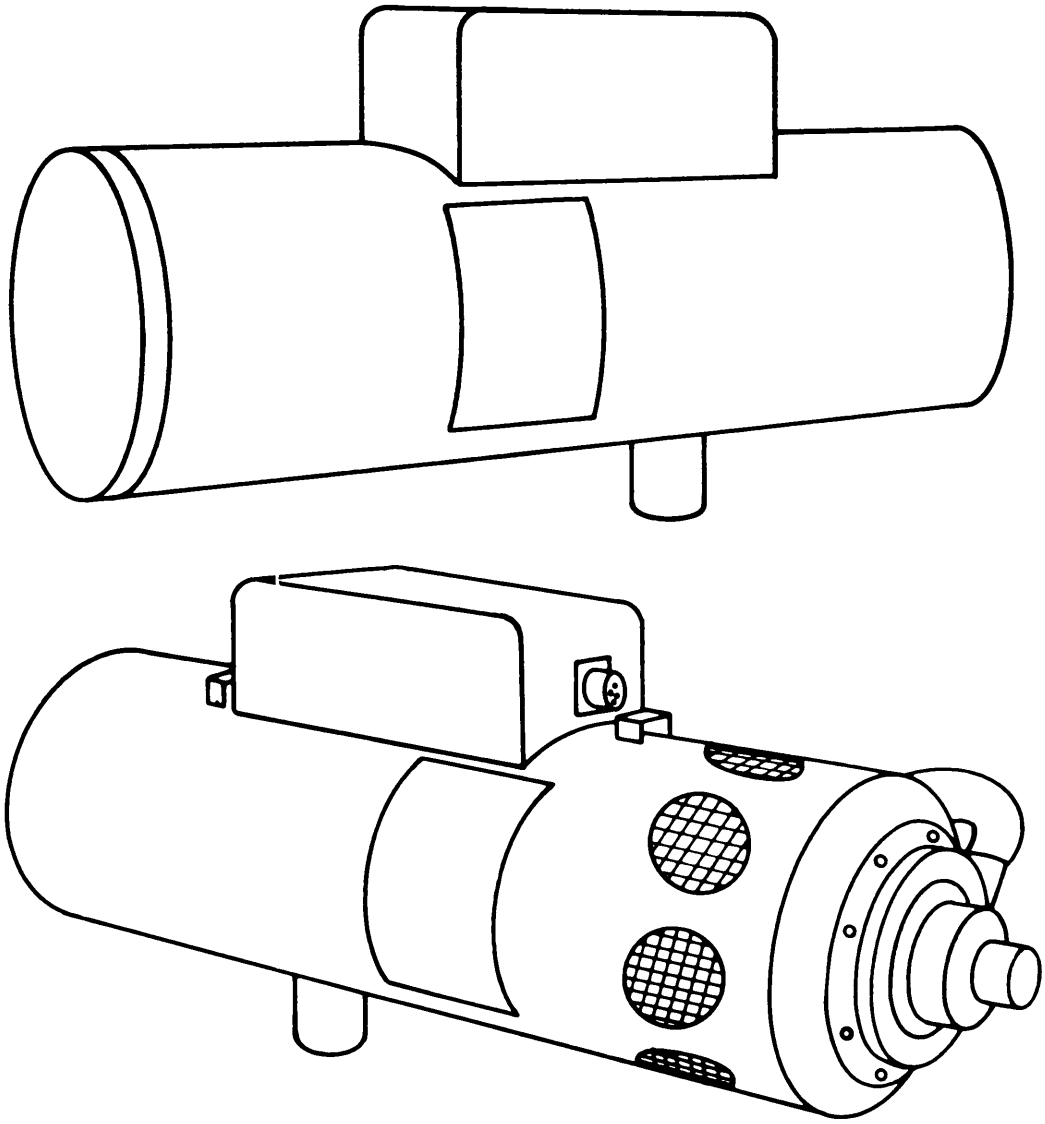


FIGURE 3. Stewart-Warner model 10560C, single air heater, NSN 2540-01-083-0691.

X-4439

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

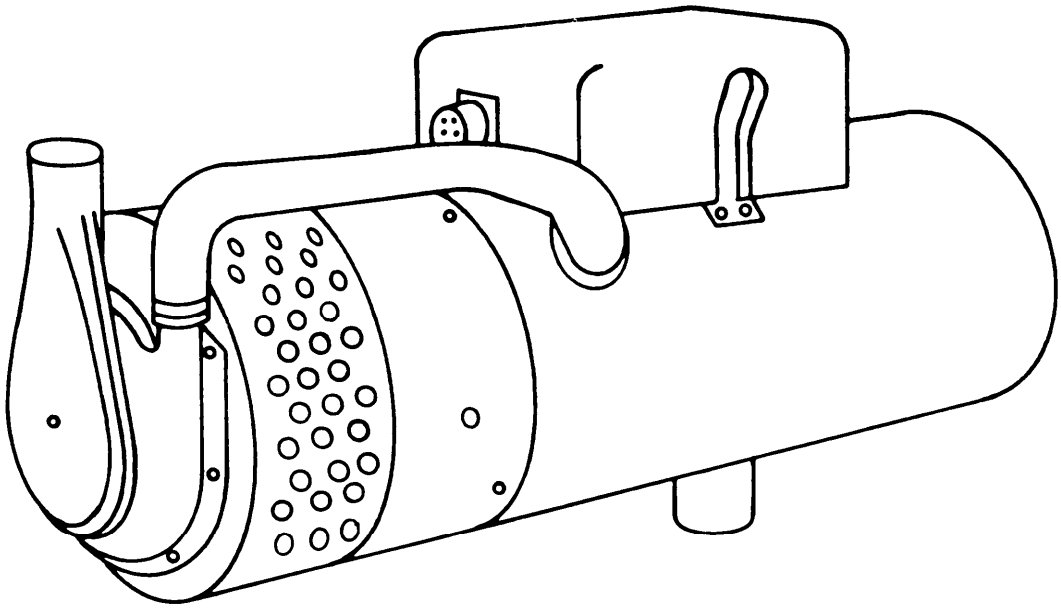


FIGURE 4. Stewart-Warner, dual air heater, model No. 10560M24BI, NSN 2540-01-169-5159 and model No. 10560M24, NSN 2540-01-071-0651.

X-4440

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

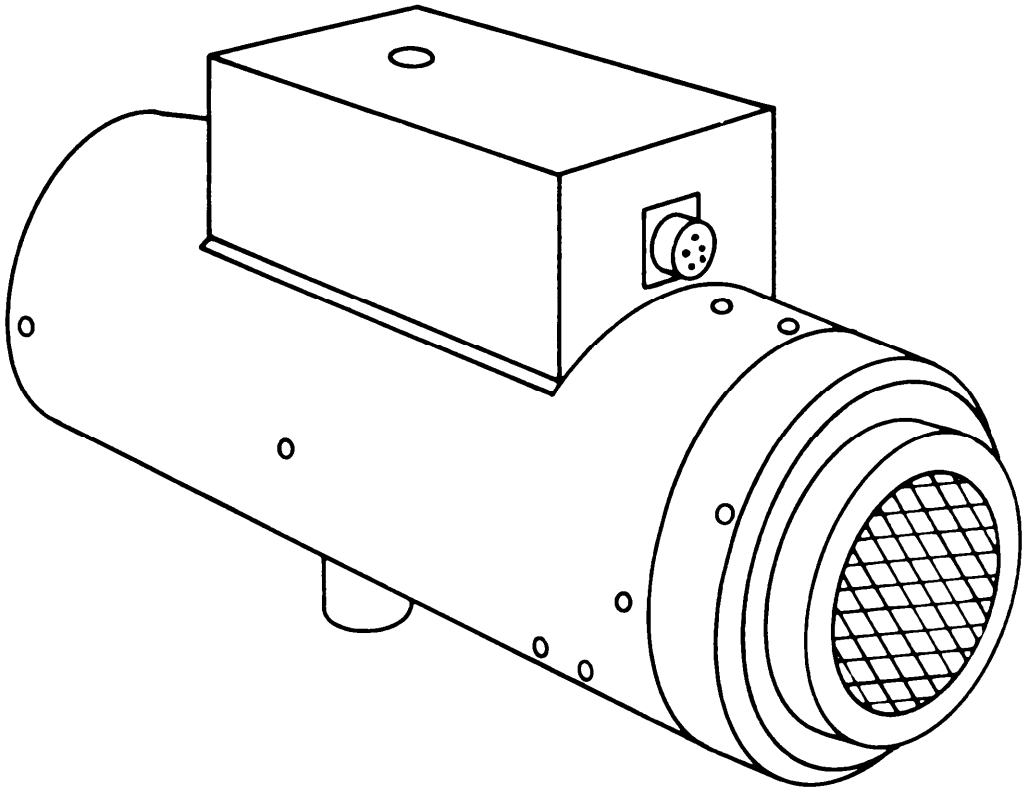


FIGURE 5. Hupp model No. MF-510A, single air heater, NSN 2540-00-930-8938.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

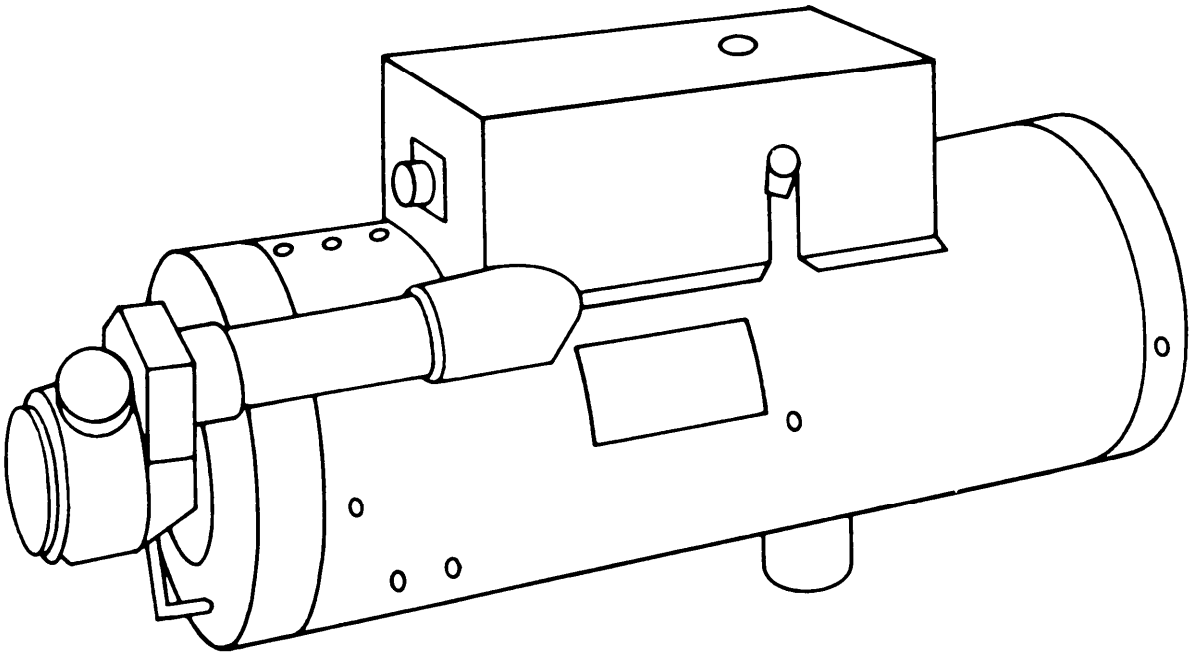



FIGURE 6. Hupp dual air heater, model No. MF510C, NSN 2540-01-162-3834 and No. MF510B, NSN 2540-01-071-0652.

X-4442

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

Nomenclature:	Heater, Vehicular Compartment: 24 Volt DC (Liquid Coolant Operated, Personnel) 20,000 Btuh.
Capacity	
Heat Output Btuh	
Nominal	20,000
Minimum w/1.6 H_20 static pressure	12,000
Air Discharge Rate cfm	
Minimum O-inch water static pressure	150
Minimum 1.6-inch water static pressure	75
Power Requirements	
Voltage nominal	24
Voltage range	20-28.5
Frequency	Direct Current
Coolants	Water and antifreeze compound conforming to 0-A-548, or water and corrosion inhibitor compound conforming to 0-I-490, or arctic-antifreeze compound conforming to MIL-A-11755.
Control, when specified:	Manual start and stop, with automatic operation if suitable thermostat is installed.
National Stock Number:	2540-00-869-0424
Line Item Number:	
Specification:	MIL-H-3199

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

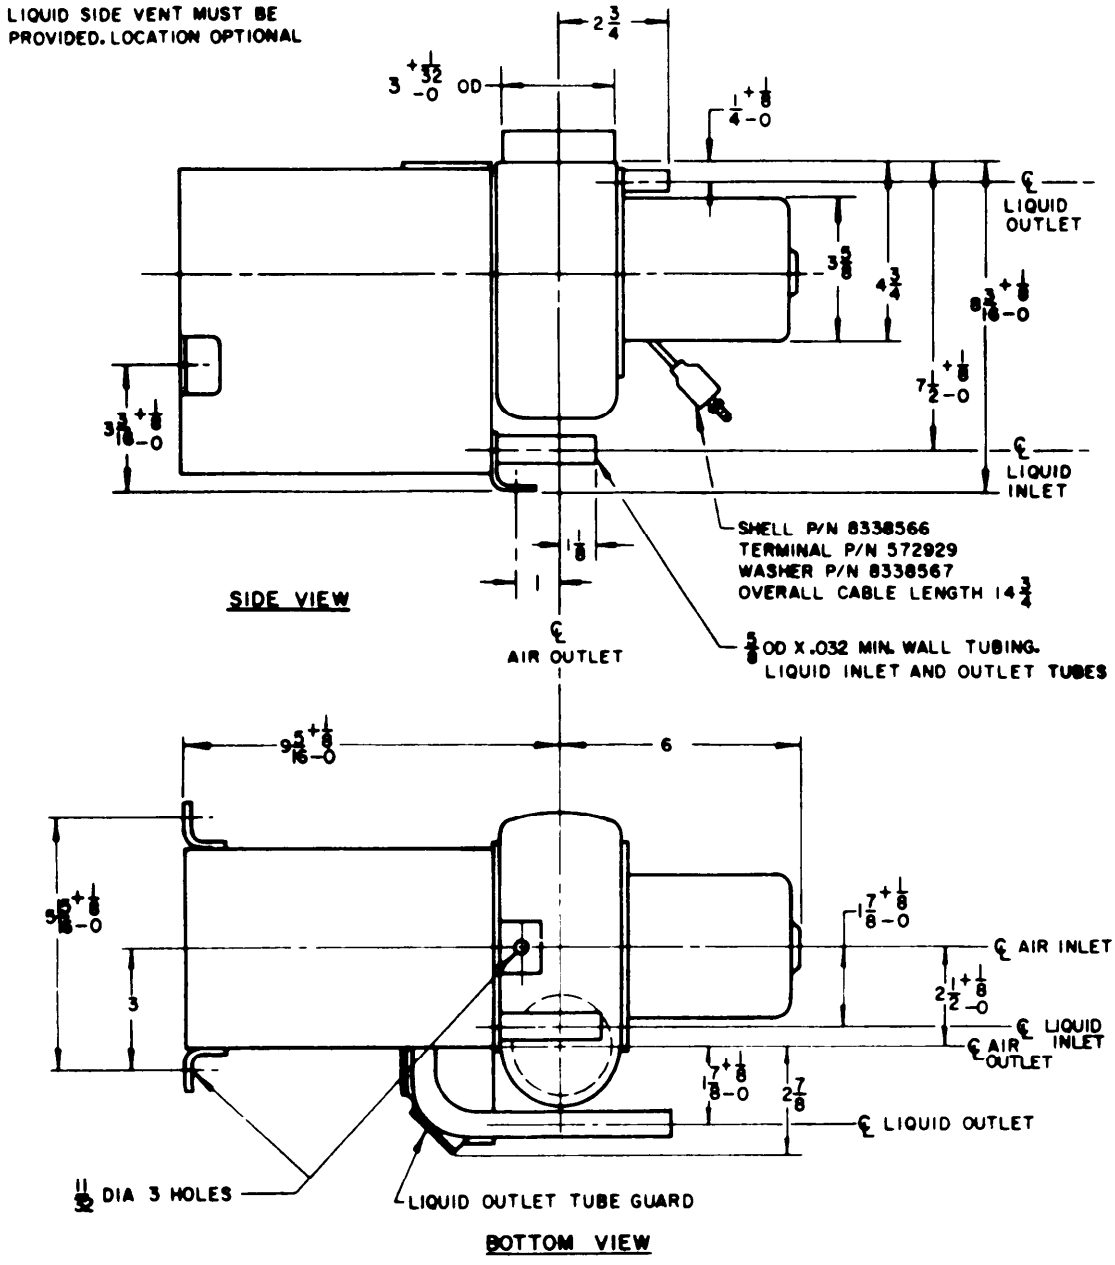


NOTES:
1. THIS HEATER SHALL CONFORM TO TYPE II, CAPACITY "A" OF MIL-H-3199.
2. DIMENSIONS ARE IN INCHES, MAXIMUM, UNLESS OTHERWISE SPECIFIED.

FIGURE 7. HEATER, LIQUID COOLANT OPERATED, 20,000 BTU/HR; DIMENSIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

Nomenclature:	Heater, Vehicular Compartment: 24 Volt DC (Liquid Coolant Operated, Personnel) 30,000 Btuh.
Capacity	
Heat Output Btuh	
Nominal	28,000
Minimum w/1.6 H_20 static pressure	15,000
Air Discharge Rate cfm	
Minimum 0-inch water static pressure	150
Minimum 1.6-inch water static pressure	75
Power Requirements	
Voltage nominal	24
Voltage range	20-28.5
Frequency	Direct Current
Coolants	Water and antifreeze compound conforming to 0-A-548, or water and corrosion inhibitor compound conforming to 0-I-490, or arctic-antifreeze compound conforming to MIL-A-11755.
National Stock Number:	2540-00-202-8591
Line Item Number:	
Specification:	MIL-H-3199

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

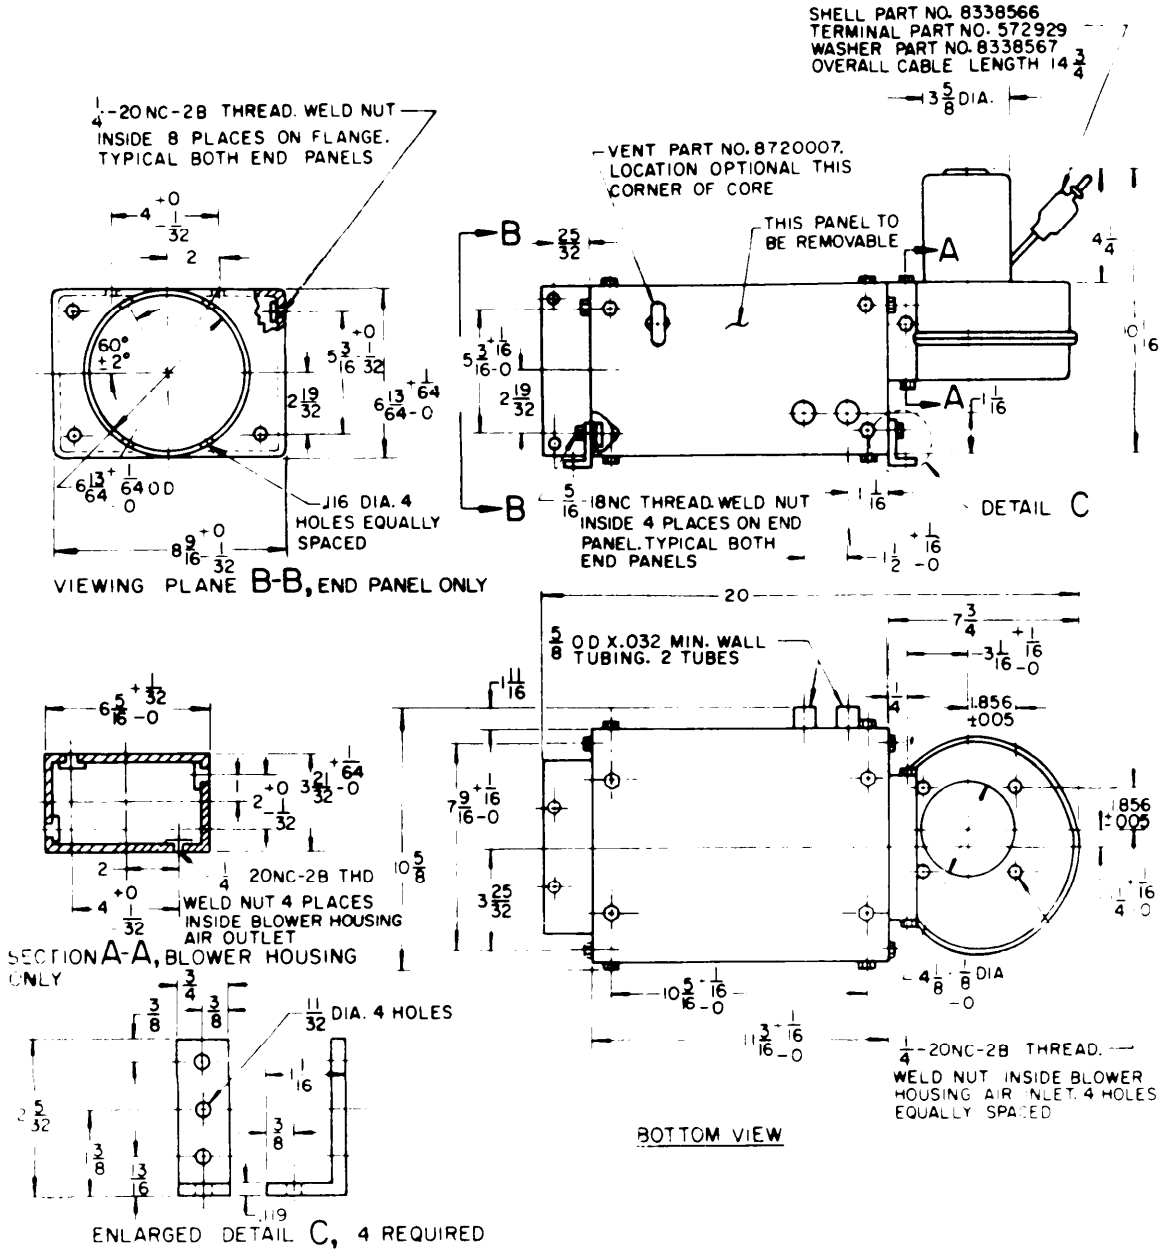

NOTES:
1. THIS HEATER SHALL CONFORM TO TYPE II, CAPACITY B OF MIL-H-3199.
2. BASIC ASSEMBLY IS SHOWN. HEATER MAY BE ADAPTED TO VARIOUS CONFIGURATIONS BY REARRANGING OR INTERCHANGING END PANELS OR BLOWER HOUSING ATTACHMENT.
3. INTERNALLY MOUNTED WELD NUTS ARE TO BE USED FOR ALL FASTENERS. SIZE IS OPTIONAL UNLESS OTHERWISE SPECIFIED.
4. DIMENSIONS ARE IN INCHES, MAXIMUM, UNLESS OTHERWISE SPECIFIED.


FIGURE 8. HEATER, LIQUID COOLANT OPERATED, 30,000 BTU/HR; DIMENSIONS X-2777

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:47Z
Check the source to verify that this is the current version before use.

Nomenclature:	Heaters, Coolant, Engine: Multifuel Burning, 24 Volt DC, 15,000 Btuh (MIL-H-3177).
Capacity	
Heat Output Btuh	
Nominal	15,000
Minimum	13,500
Coolant-Pump Characteristics	
Discharge pressure, psig	1.75
Flow minimum, gpm	0.25
Power Requirements	
Voltage nominal	24
Frequency	Direct Current
Maximum Dimensions, Inches	
Height	11
Width	7
Length	15
Weight, lbs	25
Fuel Consumption approx, gal/hr	0.3
Fuels:	Conforming to:
Diesel fuel	VV-F-800, Grades DF-A, DF-1
Gasoline	VV-G-1690, MIL-G-3056
Turbine fuel, aviation	MIL-T-5624, Grades JP-4 and JP-5.
National Stock Number:	2990-00-927-4254
Line Item Number:	
Specification:	MIL-H-3177

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

FIGURE 9. ONE TYPE OF ENGINE HEATING SYSTEM, UTILIZING COMBUSTION-HEATER

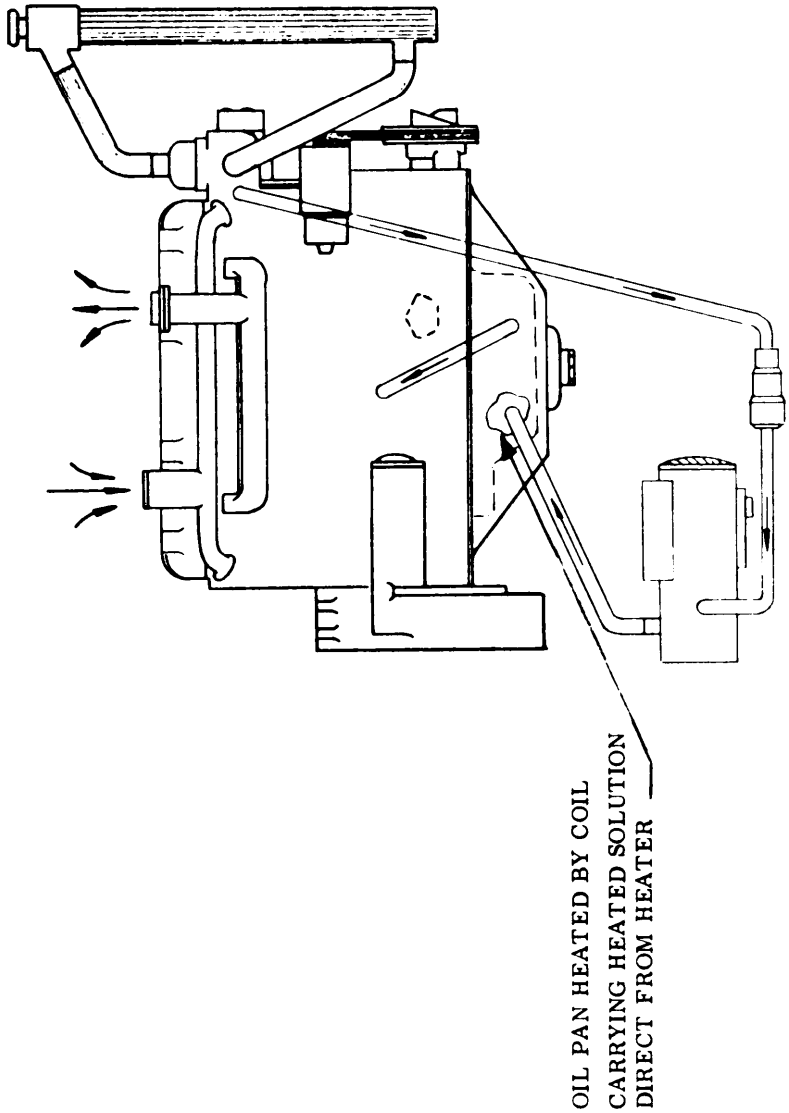

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

Nomenclature:	Heater, Coolant, Engine: Multifuel Burning, 24 Volt DC, 30,000 Btuh.
Capacity	
Heat Output Btuh	
Nominal	30,000
Minimum	27,000
Coolant Pump Characteristics	
Discharge pressure, psig	3050
Flow minimum, gpm	0.50
Power Requirements	
Voltage nominal	24
Frequency	Direct Current
Maximum Dimensions, Inches	
Height	11
Width	7
Length	20
Weight, lbs	35
Fuel Consumption, gal/hr	0.6
Fuels:	Conforming to:
Diesel fuel	VV-F-800, Grades DF-A, DF-1
Gasoline	VV-G-1690, MIL-G-3056
Turbine fuel, aviation	MIL-T-5624, Grades JP-4 and JP-5.
National Stock Number:	2990-00-135-6427
Line Item Number:	
Specification:	MIL-H-3177

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

Nomenclature:	Heater, Space, Multifuel, with Blower, 15,000 Btuh.		
Capacity			
Minimum Output	15,000		
Air Discharge Rate, cfm			
Minimum 0.2 inch water static pressure	115		
Minimum 0.35 inch water static pressure	100		
Power Requirements			
Type	I	II	Iv
Voltage	120	120	28
Frequency	60	400	dc
Phase	1	1	
Operating Weight, lbs	40		
Fuel Consumption, gal/hr	.25		
Fuels:	Conforming to:		
Gasoline	VV-G-1690, MIL-G-3056, any other up to 100 octane.		
Diesel Fuel	VV-F-800, Grades DF-1, DF-2 and DF-A.		
Control	Manual start, automatic cycling.		
National Stock Number:			
Type I	4520-01-010-0316		
Type 11	4520-00-709-9223		
Type IV	4520-00-357-0518		
Line Item Number:			
Type I	Not assigned.		
Type II	Not assigned.		
Type IV	Not assigned.		
Specification:	MIL-H-52204.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

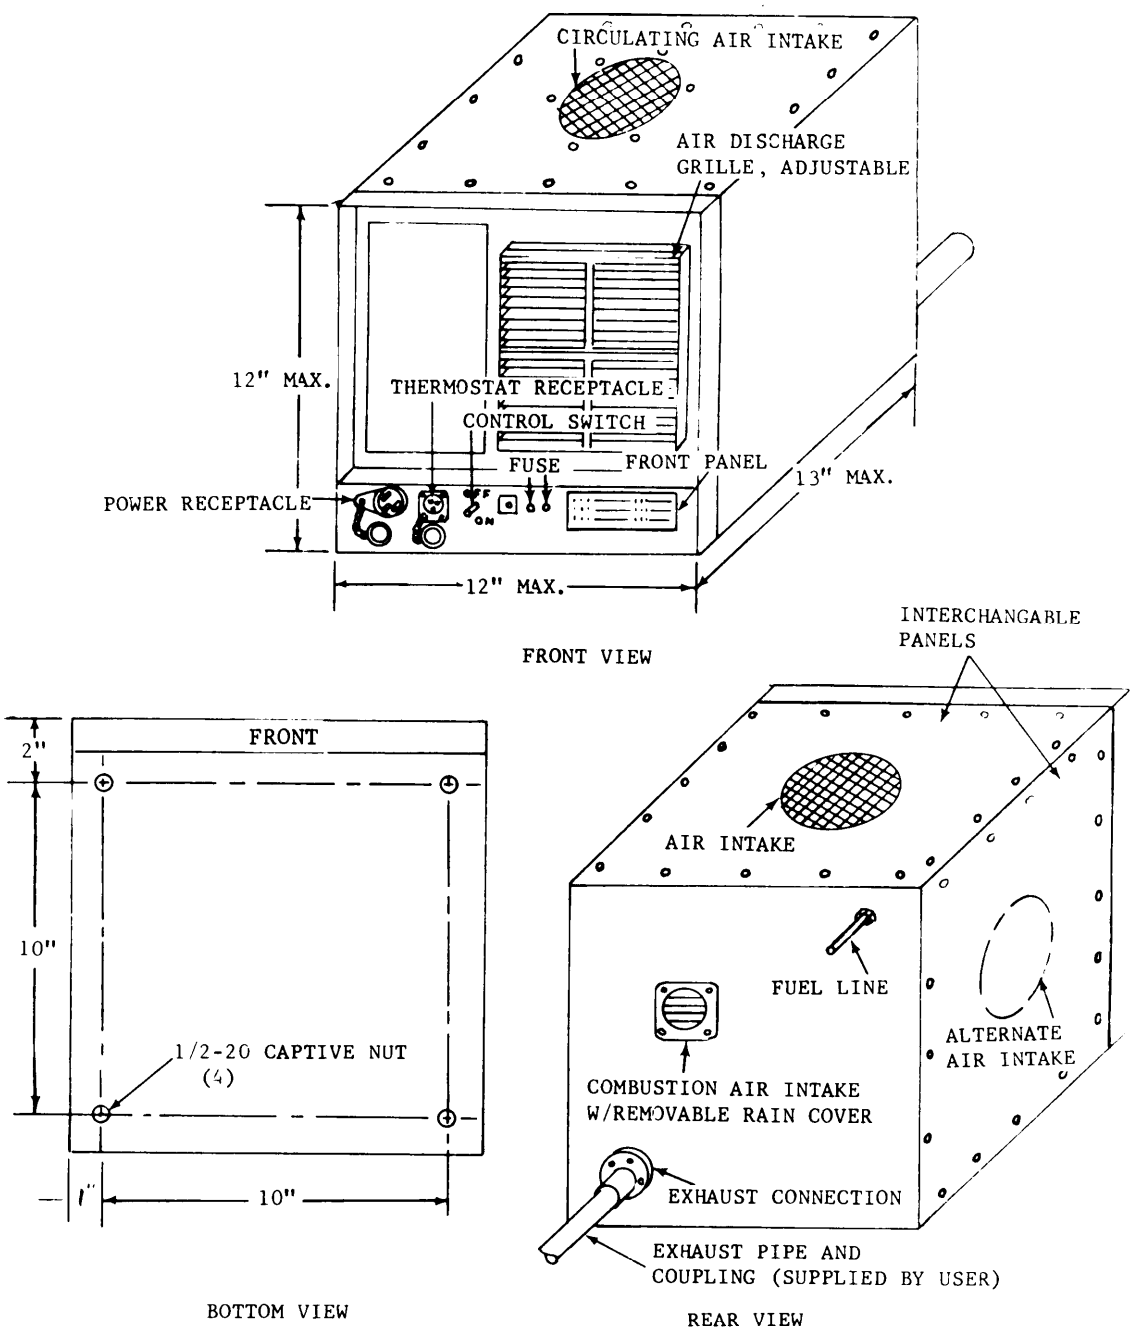


FIGURE 10. . HEATER, SPACE, MULTIFUEL, 15,000 BTU/HR; DIMENSIONS

X-2780

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

Nomenclature:	Heater, Space, Multifuel, with Blower, 60,000 Btuh.	
Capacity		
Heat Output Btuh		
Minimum	60,000	
Air Discharge Rate, cfm		
Minimum at 0.2 inch water static pressure	500	
Minimum at 0.35 inch water static pressure	425	
Power Requirements		
Type	I	II
Voltage	120	208
Frequency	50/60	400
Phase	1	3
Operating Weight, lbs	130	
Fuel Consumption, gal/hr	l 75	
Fuels:	Conforming to:	
Gasoline	VV-G-1690, MIL-G-3056, any other up to 100 octane.	
Diesel Fuel	VV-F-800, Grades DF-1, DF-2 and DF-A.	
Control	Manual start, automatic cycling	
National Stock Number:		
Type I	4520-00-683-8595	
Type II	Not assigned.	
Line Item Number:		
Type I	K26301	
Type II	Not assigned.	
Specification:	MIL-H-11511	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

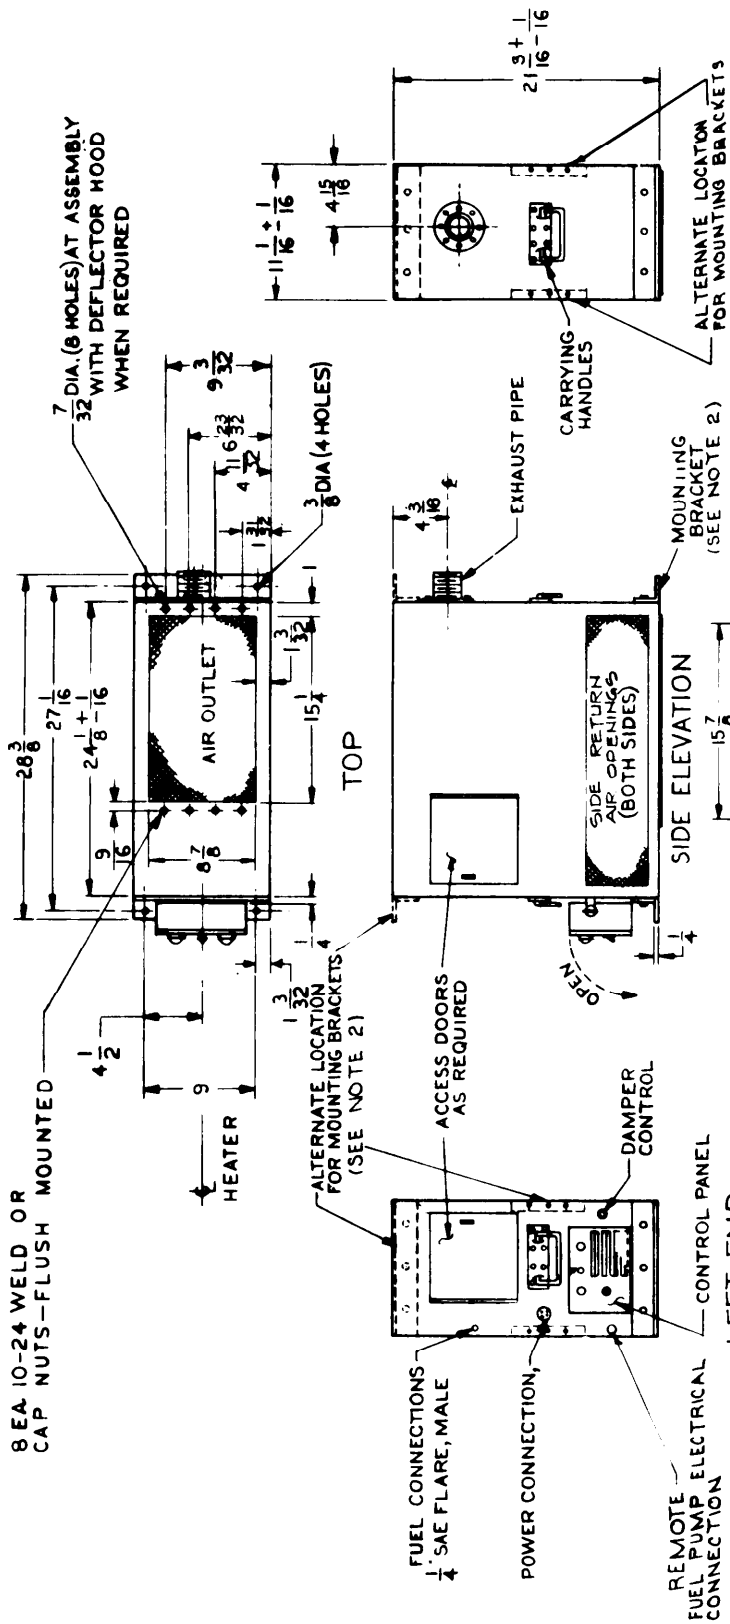


FIGURE 11. Heater, space, with blower, 60,000 btu/hr (discharge up position) (see note 2).

X-1028C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

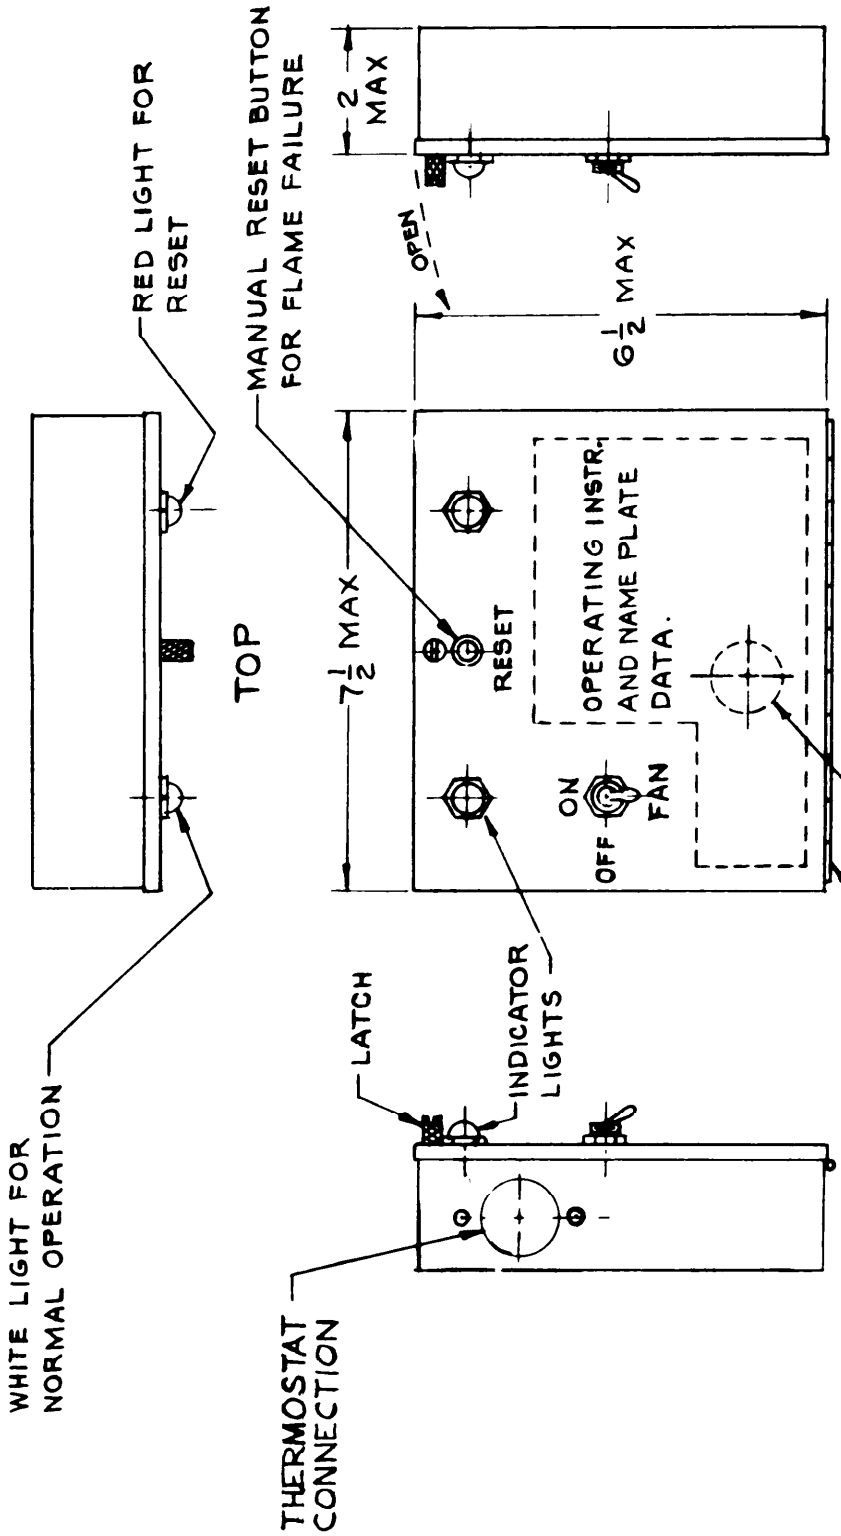


FIGURE 12.
HEATER CONTROL BOX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

Nomenclature:	Heater, Space, Electric with Blower, 5,000 Btuh.
Capacity	
Heat Output Btuh	
Minimum	5,000
Air Discharge Rate, cfm	
Minimum at 0-inch water static pressure	92
Power Requirements	
Voltage	115
Frequency	60
Phase	1
Watts	1500
Operating Weight, lbs	25
Control	Manual start-stop, switch adjustable thermostat regulation. Permits fan operation without heating.
National Stock Number:	4520-00-177-6198
Line Item Number:	
Specification:	MIL-H-52641

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.


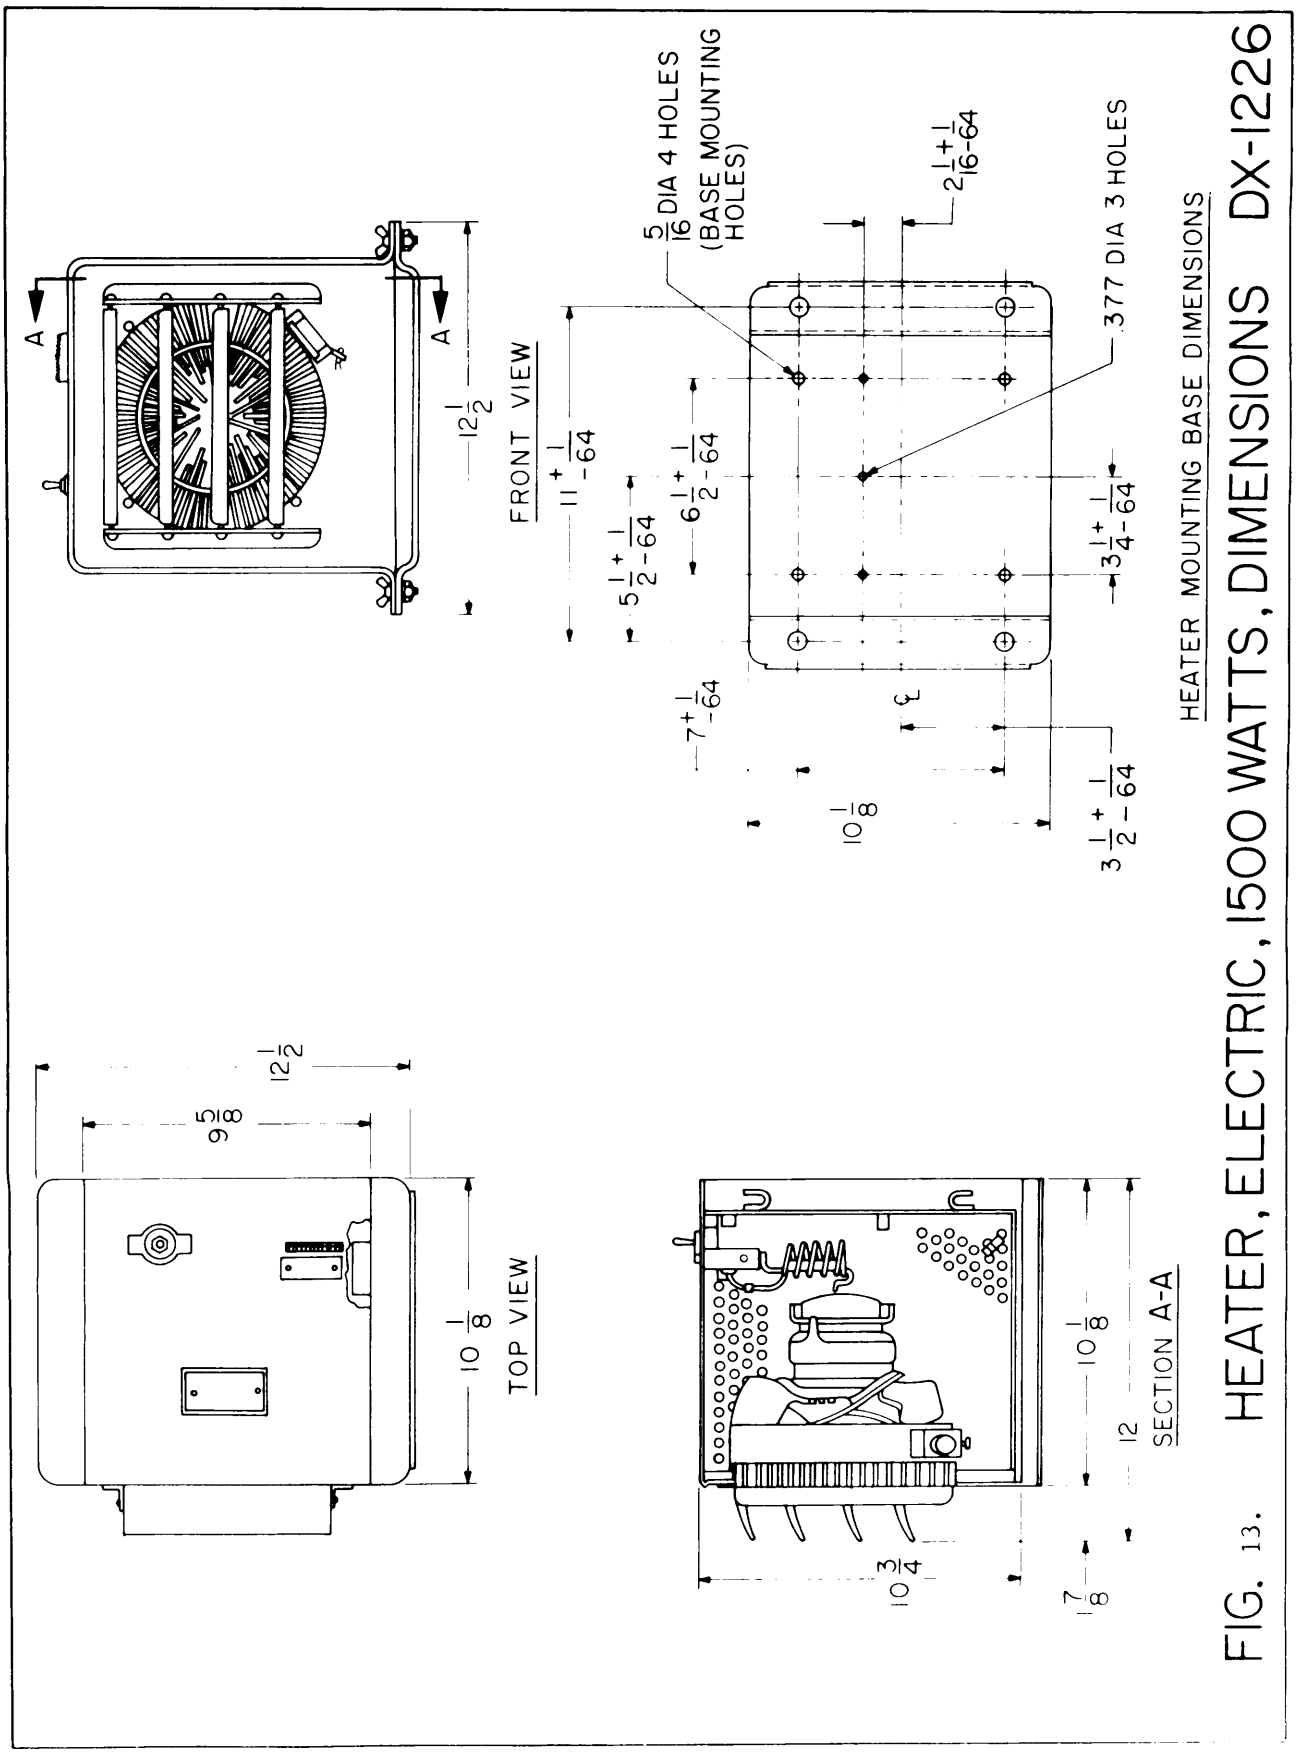


FIG. 13. HEATER, ELECTRIC, 1500 WATTS, DIMENSIONS DX-1226

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

Nomenclature:	Heater, Space, Radiant Type, Portable, Nonblower, 45,000 Btuh (M-1941).
Capacity	
Heat Output Btuh	45,000
Fuel	
Type I	Coal or solid fuel burning.
Type II	Oil burning.
Fuel Consumption	
Type I	1/4 ton coal per week.
Type II	2/3 gallon per hour.
Fuels	
Type I	Coal and other solid fuels.
Type 11	Diesel, conforming to VV-F-800, Grade DF-2 or lighter; jet fuel or gasoline, any grade.
Operating Weight, lbs	44
Heat Output Control	
Type I	Manual, by setting of stack-damper and ash door and by manipulation of unburned fuel and fire.
Type II	Manual, by float valve.
National Stock Number:	
Type I	4520-00-257-4877
Type II	4520-00-927-4214
Line Item Number:	
Type I	K25890
Type II	K25943
Specification:	MIL-H-13514

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

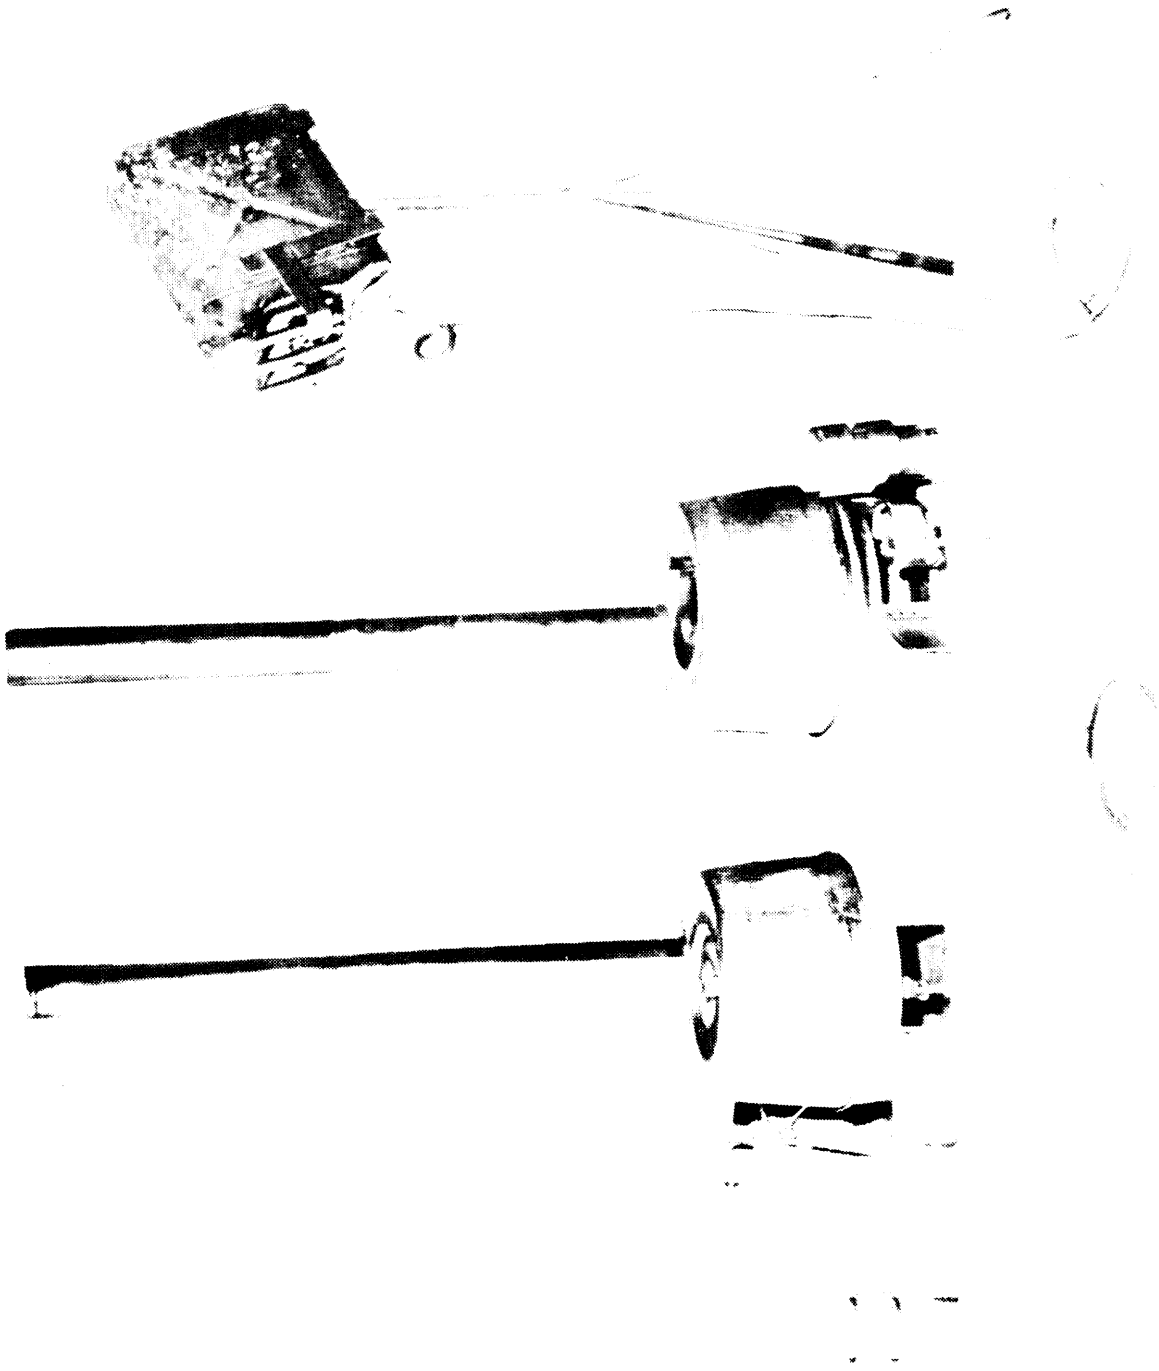

X-2781A

FIGURE 14. Heater, radiant type, portable, 45,000 btu/hr (M-1941).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

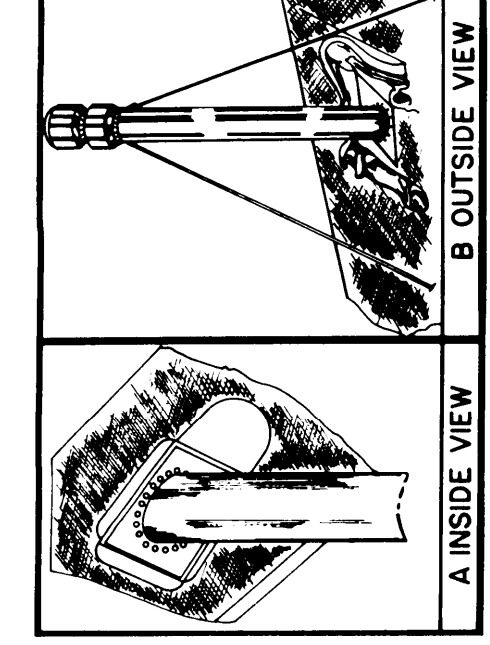


FIGURE 15.1 Accessories. (M-41).

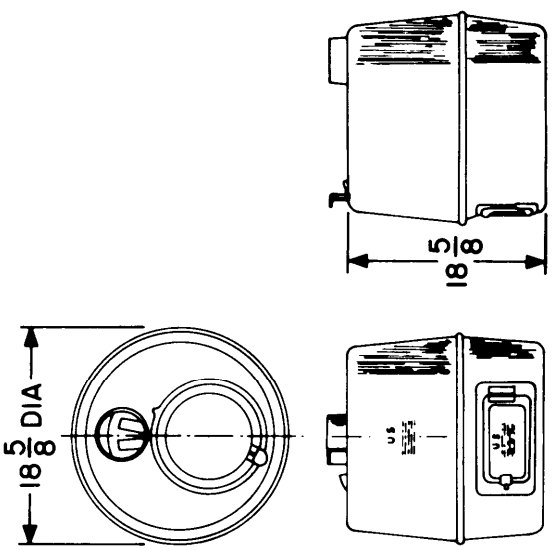


FIGURE 15.2 Overall dimensions (M-41).

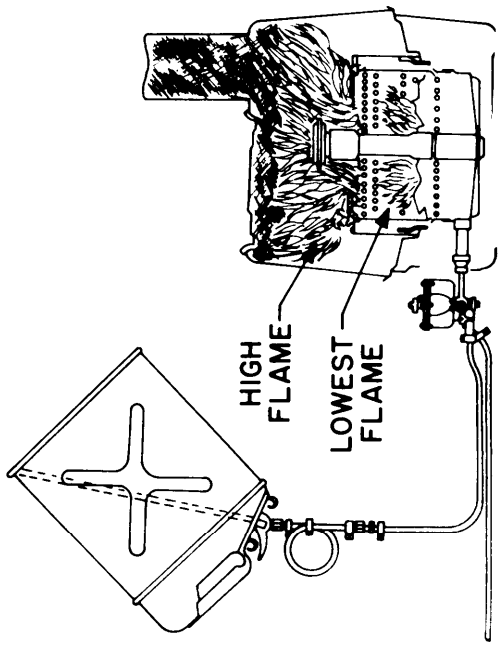


FIGURE 15.3 Internal arrangement, liquid fueled type (M-41).

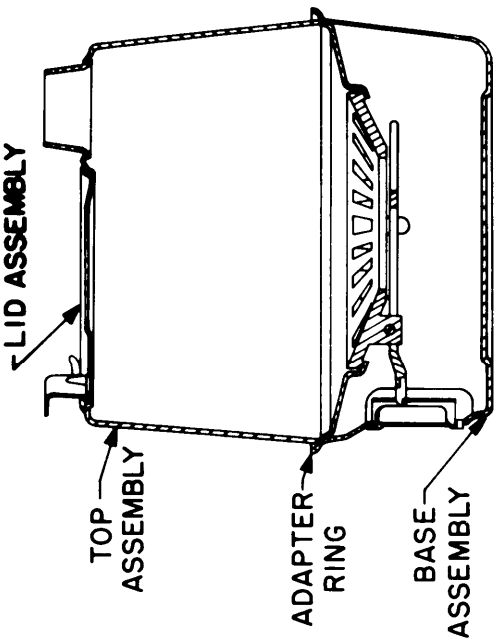


FIGURE 15.4 Internal arrangement burning type (M-41).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

Nomenclature:	Heater, Space, Radiant Type, portable, Nonblower, 60,000 Btuh (Yukon).
Capacity	
Heat Output Btuh	60,000
Fuel Consumption, gal/hr	0.625
Fuels	Normally gasoline, but provision made for solid fuel to be used when necessary.
Weight (Packed), lbs	33
Size: Height with diverter	106 inches
Height stovetop, assembled.	16 inches
Length, assembled with stack.	30 inches
Width, assembled.	10 inches
Control	Drip valve with sight glass.
National Stock Number:	4520-00-287-3353
Line Item Number:	K26275
Specification:	MIL-H-12340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

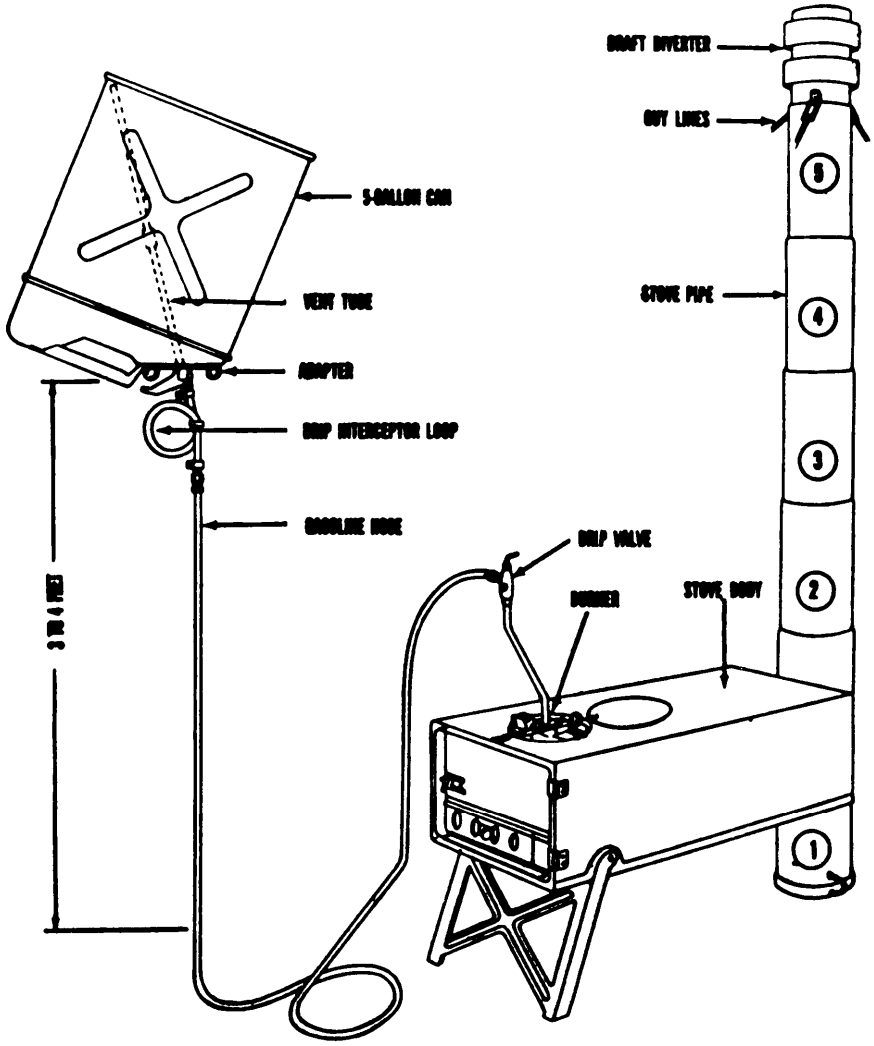


FIGURE 16. INSTALLATION SETUP OF YUKON STOVE

X-2782

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:47Z
Check the source to verify that this is the currentversion before use.

Nomenclature	Heater, Space, Fuel Oil, Floor Installation, Nonblower, 70,000 Btuh (Barracks Heater).
Capacity Heat Output Btuh	 70,000
Fuel Consumption, gal/hr	3/4
Fuels	Diesel, Grades DF-A, DF-1, and DF-2, conforming to VV-F-800.
Weight, lbs	87
Control	Manual, float type fuel valve.
National Stock Number:	4520-00-540-0557 4520-00-540-0557, with fan and smoke stack.
Line Item Number:	K26164
Specification:	MIL-H-14516

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

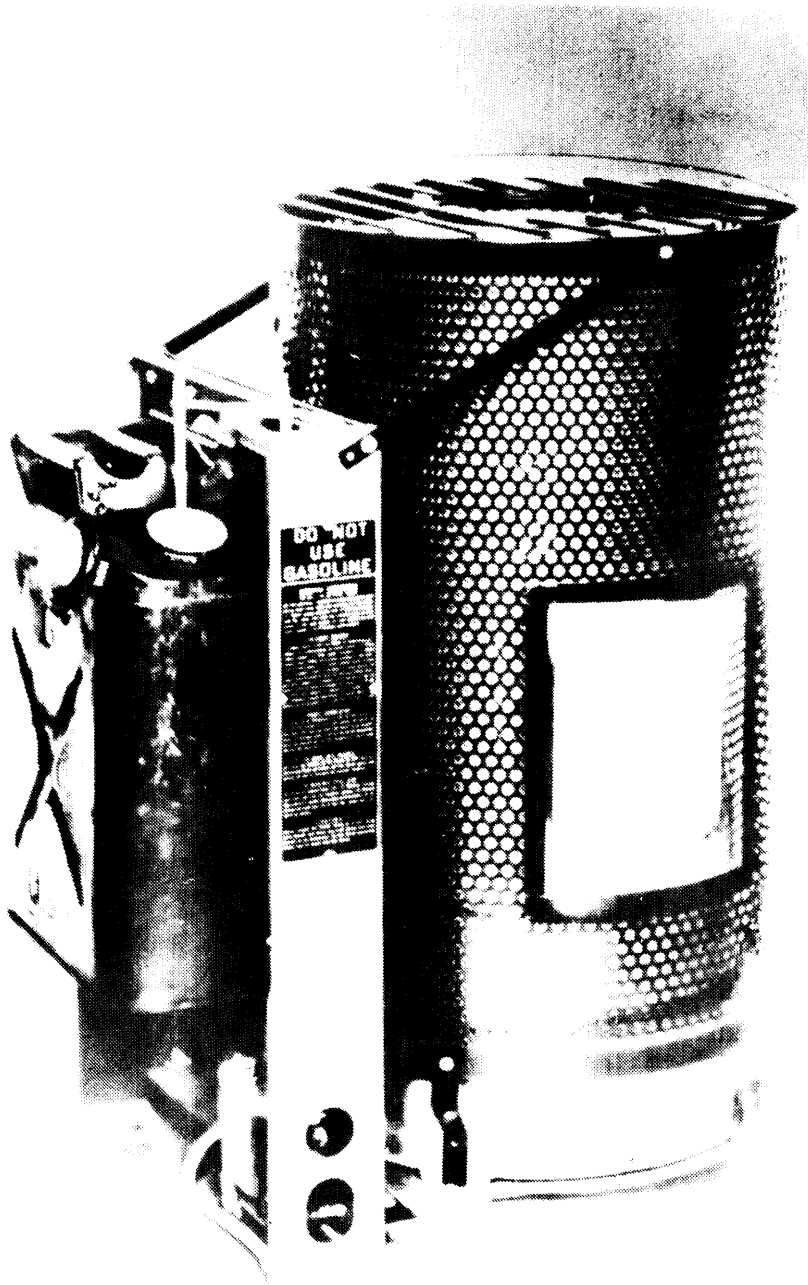
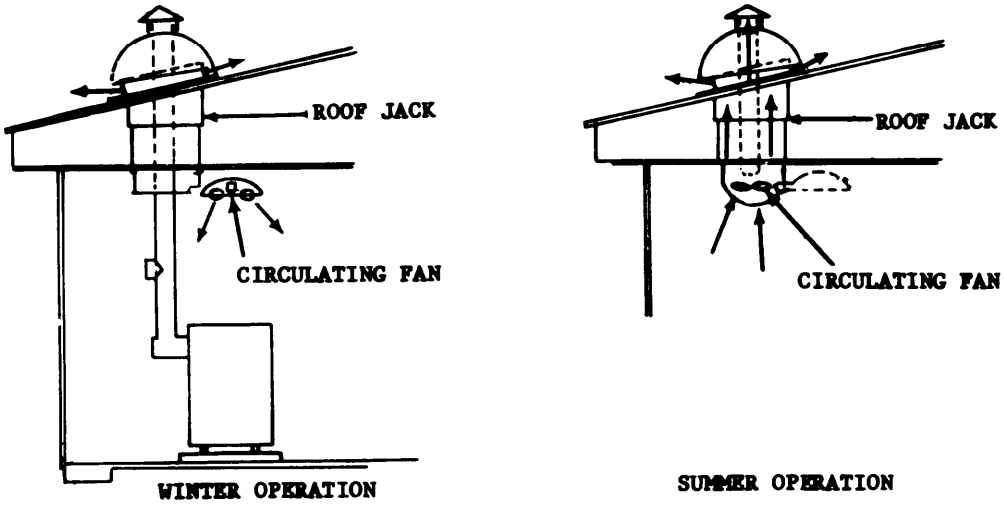


FIGURE 17. Heater, space, oil-fired, 70,000 btu/hr (barracks heater).

X-27838

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.



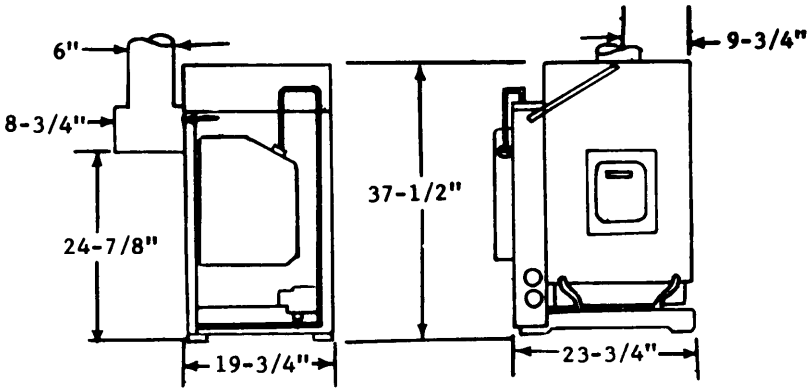


FIGURE 18. Heater, space; oil-fired, 70,000 btu/hr; dimensions and accessories (barracks heater).

X-27848

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

Nomenclature:	Heater, Duct-Type, Portable, Multifuel, Self-powered, 250,000 Btuh, Wheel-Mounted.
Capacity Heat Output Btuh Minimum	 250,000 at 0“ F outdoor temperature
Air Discharge, cfm Minimum l-inch water static pressure	 1300 to 1900
Power Source	Integral turbine engine
Operating Weight, lbs Size: Width Height Length	650 40 inches 58 inches 65 inches
Fuel Consumption, gal/hr	3.25
Fuels	Gasoline, DF-1, DF-2, DF-A, JP-4, JP-5, Kerosene.
Control	Manual start, automatic cycling.
National Stock Number	Not assigned, under development.
Line Item Number:	Z32890
Specification:	Not assigned, under development.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:47Z
Check the source to verify that this is the currentversion before use.

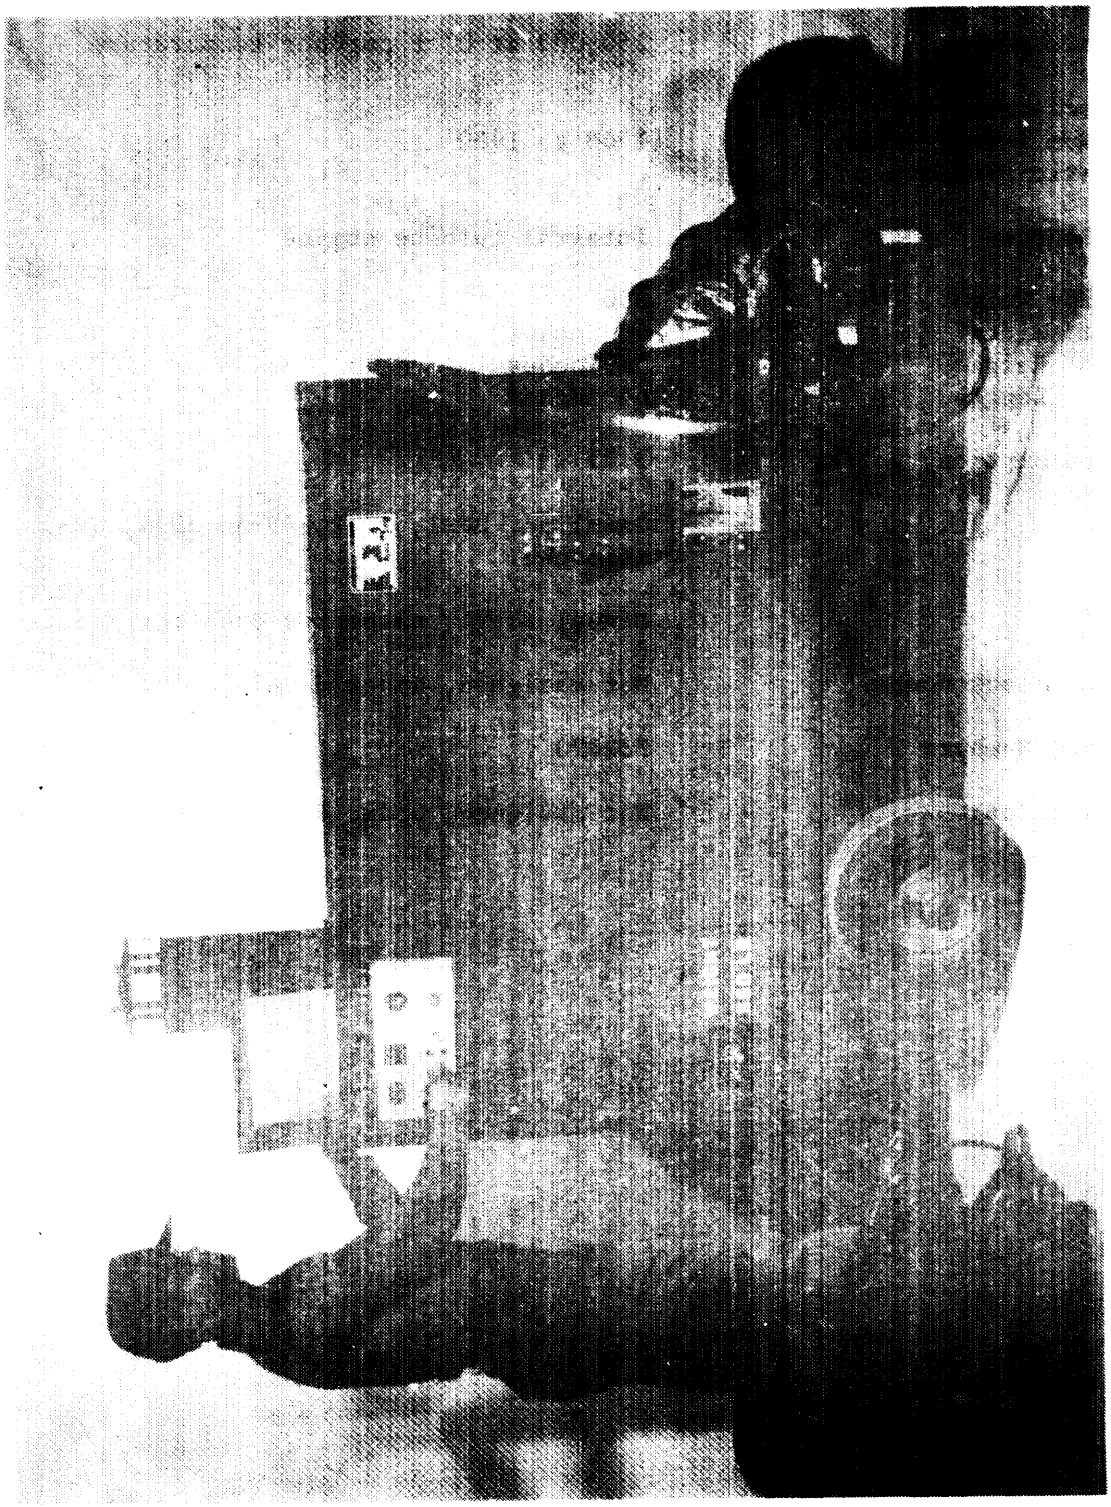


FIGURE 19. Heater, duct type, portable, multifuel, self-powered, 250,000 BTUH, wheel-mounted.

X-4107A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

Nomenclature:	Heater, Duct-Type, Portable, 400,000 Btuh.
Capacity Heat Output Btuh Minimum	 400,000 at (-) 65° F.
Air Discharge, cfm	1100 to 1500
Prime Mover: Class 1 Class 2 Class 3 Class 4	 Equipped with a commercial gasoline engine. Equipped with an electric motor, 208/220 volt, 3 phase, 60 Hertz. Equipped with a military standard gasoline engine 1-1/2 hp., Model No. 1A08-III. Equipped with a commerical diesel engine.
Dry Weight, lbs	675 for class 1, 2, or 3 heaters. 800 for class 4 heaters.
Fuels: For classes 1,2, and 3 only Gasoline For class 4 only Diesel fuel Turbine Fuel	Conforming to: VV-G-1690, MIL-G-3056, MIL-G-5572 VV-F-800, Grades DF-1, DF-2 and DF-A. MIL-T-5624, Grades JP-4 and JP-5, MIL-T-83133, Grade JP-8.
Fuel Consumption, gal/hr	5
Control	Manual start, automatic control of air discharge temperature.
National Stock Number:	4520-00-203-0224
Army Line Item Number:	K24931
Specification:	MIL-H-4607

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

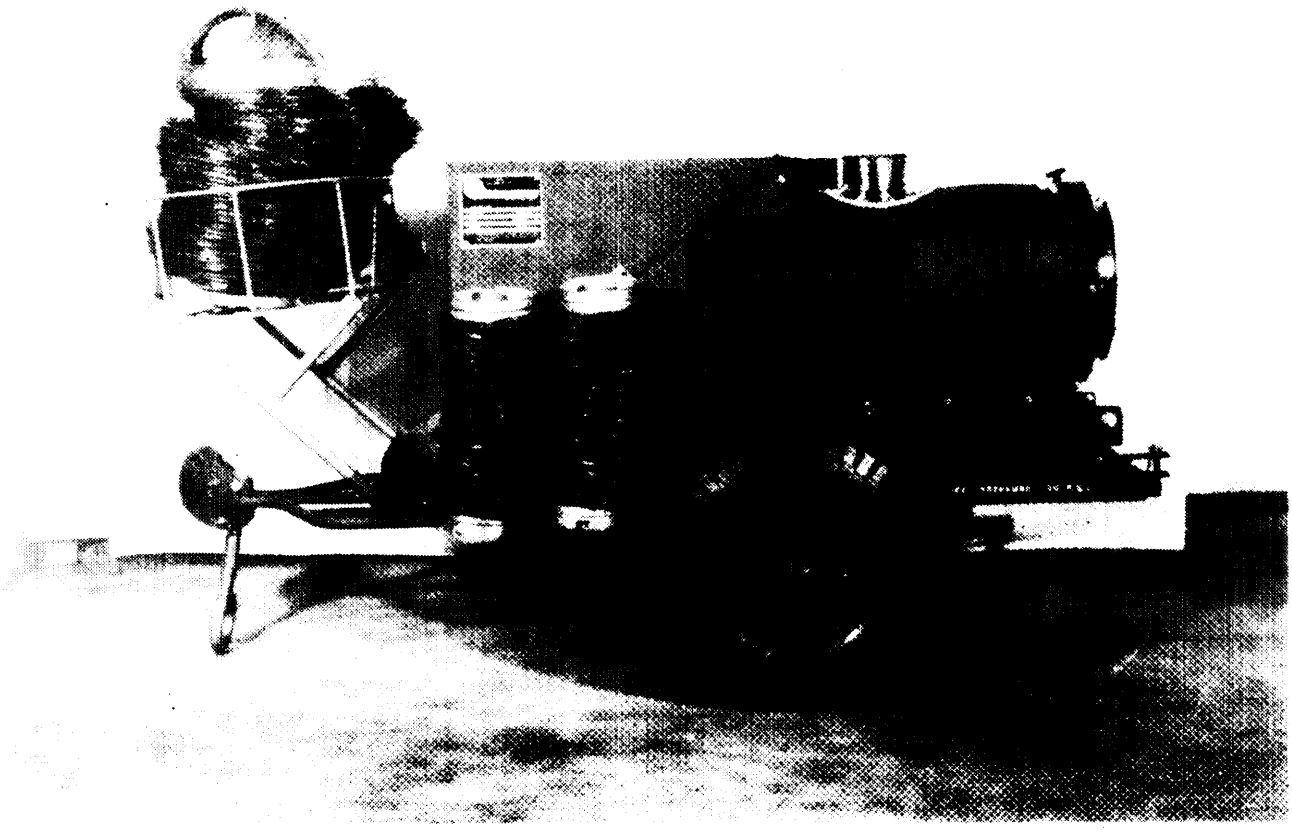


Figure 20. Heater, duct type, portable, 400,000 Btuh.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Belvoir R&D Center
ATTN: STRBE-XDS TSE
Fort Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-STD-1407B	Heaters, Vehicular Compartment; Heaters, Coolant, Engine; Heaters, Space; Heaters, Duct-Type

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.