INCH-POUND

MIL-STD-1408B
5 March 1992
SUPERSEDING
MIL-STD-1408A
9 APRIL 75

MILITARY STANDARD

# AIR CONDITIONERS,

# STANDARD FAMILY OF MILITARY AIR CONDITIONERS,

# GENERAL APPLICATION CHARACTERISTICS

AMSC N/A

FSC 4120

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

# FOREWORD

1. This military standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U. S. Army Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

CONTENTS


| Paragraph: | | Page |
|---|---|---|
| 1. | SCOPE | 1 |
| 1.1 | Scope | 1 |
| 2. | REFERENCED DOCUMENTS | 1 |
| 2.1 | Government documents | 1 |
| 2.1.1 | Specifications | 1 |
| 2.1.2 | Government drawings | 1 |
| 2.2 | Non-Government documents | 2 |
| 3. | DEFINITIONS | 3 |
| 3.1 | Definitions and abbreviations | 3 |
| 4. | GENERAL INFORMATION | 4 |
| 4.1 | Capacity. | 4 |
| 4.2 | Design. | 4 |
| 4.3 | Reduction in air flow | 4 |
| 5. | DETAIL REQUIREMENTS | 4 |
| 5.1 | The standard family of military air conditioners | 4 |
| 5.1.1 | Compact air conditioners | 4 |
| 5.1.2 | Compact vertical air conditioners | 5 |
| 5.1.3 | Compact horizontal air conditioners | 6 |
| 5.1.4 | Split-package air conditioner | 6 |
| 5.1.5 | MPI air conditioners | 6 |
| 5.1.6 | Trailer mounted 18,000 Btuh A/C | 8 |
| 5.1.7 | Deployable medical system (DEPMED) A/C | 8 |
| 5.1.8 | Detailed drawings | 8 |
| 5.2 | Method of reference | 8 |

| Figure: | | |
|---|---|---|
| 1. | Compact vertical air conditioners | 5 |
| 2. | Compact horizontal air conditioners | 6 |
| 3. | Vertical multiple power input air conditioner | 7 |
| 4. | Horizontal multiple power input air conditioners | 7 |
| 5. | Horizontal compact unit, (9,000 Btuh) | 9 |
| 6. | Horizontal compact unit, (18000 Btuh) | 12 |
| 7. | Horizontal compact unit, (36,000 Btuh) | 16 |
| 8. | Vertical compact unit, (6,000 Btuh). | 18 |
| 9. | Vertical compact unit, (9,000 Btuh) | 20 |
| 10. | Vertical compact unit, (18,000 Btuh) | 22 |
| 11. | Vertical compact unit, (36,000 Btuh) | 24 |
| 12. | Vertical compact unit, (60,000 Btuh) | 27 |
| 13. | Split package unit, (18,000 Btuh) | 29 |
| 14. | MPI, compact vertical (18,000 Btuh) | 31 |
| 15. | MPI, compact vertical (36,000 Btuh) | 33 |
| 16. | MPI, compact horizontal (18,000 Btuh) | 35 |
| 17. | MPI, compact horizontal (36,000 Btuh) | 37 |
| 18. | Trailer mounted, horizontal (18,000 Btuh) | 39 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

19. DEPMED, 54,000 Btuh . . . . . 41



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

## 1. SCOPE

1.1 Scope. This standard serves as a catalog of units comprising the standard family of military air conditioners. It presents capabilities and application characteristics useful in selecting a unit to meet a defined need. In cases where the need is not well defined, reference to Army Materiel Command Pamphlet 706-120, Criteria for Environmental Control of Mobile Systems, is invited and encouraged.

## 2. REFERENCED DOCUMENTS

2.1 Government documents.

2.1.1 Specifications. The following specifications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS), and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

| | |
|---|---|
| MIL-A-52767 | - Air Conditioners: Vertical and Horizontal. |
| MIL-A-52963 | - Air Conditioner: Split-Package, 208-Volt, 3-Phase 400-Hertz, AC, 18,000 Btu/Hr Cooling, 30,000 Btu/Hr Heating. |
| MIL-A-53089 | - Air Conditioners: Vertical and Horizontal, Compact, Multiple Power Input. |
| MIL-A-83216 | - Air Conditioner A/E32C-39. |

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Printing Service Office (NPPSO), Standardization Documents Order Desk, Building 4 D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Government drawings. The following Government drawings form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

| | |
|---|---|
| TA13217E6898 | - Air Conditioner, Vertical, Compact, 60,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz. |
| TA13218E9880 | - Air Conditioner, Vertical, Compact, 6,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz. |
| TA13218E9890 | - Air Conditioner, Vertical, Compact, 6,000 Btu/hr, 115 Volt, Single-Phase, 50/60 Hertz. |
| TA13218E9900 | - Air Conditioner, Vertical, Compact, 9,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz. |
| TA13218E9905 | - Air Conditioner, Vertical, Compact, 9,000 Btu/hr, 115 Volt, Single-Phase, 50/60 Hertz. |
| TA13218E9910 | - Air Conditioner, Vertical, Compact, 9,000 Btu/hr, 208 Volt, 3-Phase, 50/60 Hertz. |
| TA13218E9915 | - Air Conditioner, Vertical, Compact, 9,000 Btu/hr, 230 Volt, Single-Phase, 50/60 Hertz. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| TA13221E9100 | - 18,000 BTUH Split Package Air Conditioner, 18,000 BTUH Cooling, 30,000 BTUH Heating, 208V, 3 Phase, 400 Hertz. |
| TA13222E9150 | - Air Conditioner, Horizontal, Compact, 18,000 Btu/hr, 230 Volt, Single-Phase, 50/60 Hertz. |
| TA13222E9160 | - Air Conditioner, Horizontal, Compact, 18,000 Btu/hr, 208 Volt, 3-Phase, 50/60 Hertz. |
| TA13222E9170 | - Air Conditioner, Horizontal, Compact, 18,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz. |
| TA13225E8000 | - Air Conditioner, Vertical, Compact, 18,000 Btu/hr, 208 Volt, 3-Phase, 50/60 Hertz. |
| TA13225E8010 | - Air Conditioner, Vertical, Compact, 18,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz. |
| TA13225E8200 | - Air Conditioner, Vertical, Compact, 36,000 Btu/hr, 208 Volt, 3-Phase, 50/60 Hertz. |
| TA13225E8210 | - Air Conditioner, Vertical, Compact, 36,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz. |
| TA13225E8445 | - Air Conditioner, Horizontal, Compact, 9,000 Btu/hr, 230 Volt, Single-Phase, 50/60 Hertz. |
| TA13225E8450 | - Air Conditioner, Horizontal, Compact, 9,000 Btu/hr, 115 Volt, Single-Phase, 50/60 Hertz. |
| TA13225E8455 | - Air Conditioner, Horizontal, Compact, 9,000 Btu/hr, 208 Volt, 3-Phase, 50/60 Hertz. |
| TA13225E8460 | - Air Conditioner, Horizontal, Compact, 9,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz. |
| TA13225E9500 | - Air Conditioner, Horizontal, Compact, 36,000 Btu/hr, 208 Volt, 3-Phase, 50/60 Hertz. |
| TA13225E9600 | - Air Conditioner, Horizontal, Compact, 36,000 Btu/hr, 208 Volt, 3-Phase, 400 Hertz. |
| TA13228E4000 | - Air Conditioner, Vertical, Compact, 60,000 Btu/hr, 208 Volt, 3-Phase, 50/60 Hertz. |
| TA13228E4200 | - Air Conditioner, Horizontal, Compact, 18,000 Btu/hr, 230 Volt-AC, Single-Phase, 50/60 Hertz, and 208 Volt-AC, 3-Phase, 50/60/400 Hertz. |
| TA13228E4250 | - Air Conditioner, Vertical, Compact, 18,000 Btu/hr, 208 Volt-AC, 3-Phase, 50/60/400 Hertz. |
| TA13228E6700 | - Air Condtioner, Horizontal, Compact, 36,000 Btu/hr, 208 Volt-AC, 3-Phase, 50/60/400 Hertz. |
| D13229E6716 | - Receptical, Wall Mounting. |
| D13229E6718 | - Plug, Straight. |
| TA13229E8100 | - Air Conditioner, Vertical, Compact, 36,000 Btu/hr, 208 Volt-AC, 3-Phase, 50/60/400 Hertz. |
| TA13229E8611 | - Air Conditioner: Trailer Mounted, Generator-Set-Powered, 18K Btuh. |

(Copies of drawings required by contractors in connection with specific acquisition functions should be obtained from the USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-FES, Fort Belvoir, VA 22060-5606.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE STD 16 - Method of Testing for Rating Room Air Conditioners and Packaged Terminal Air Conditioners.
ASHRAE STD 37 - Method of Testing for Rating Unitary Air Conditioning and Heat Pump Equipment.

(Application for copies should be addressed to the American Society of Heating, Refrigerating and Air-Conditioning Engineers, 1791 Tullie Circle, NE, Atlanta, GA 30329.)

## 3. DEFINITIONS

3.1 Definitions and abbreviations. The definitions and abbreviations used in this standard are as follows:

| | |
|---|---|
| A/C | - Air conditioner - A device with the primary function of cooling air. This cooled air is then used to cool equipment and personnel within an enclosure. An A/C may or may not include supplemental heating capability. Usually provides secondary effect of dehumidifying and filtering the air being circulated within the space (see the figures specified in 5.1.8). |
| Btu | - British thermal units - The quantity of heat required to raise the temperature of one pound of water one degree Fahrenheit at, or near, its point of maximum density (39.1 °F). |
| Btuh | - British thermal units per hour. |
| DEPMED | - Deployable medical system. |
| Dry bulb temperature | - Dry bulb temperature is that measured by an ordinary thermometer. It indicates only sensible heat changes. |
| EMI | - Electromagnetic interference - The interference with the operation of electronic equipment that is caused by electromagnetic radiation emissions from electromechanical equipment such as air conditioners. |
| EMP | - Electromagnetic pulse - An intense burst of electromagnetic energy resulting from a nuclear explosion. The energy released can burn out the solid state components used in many A/Cs and shelters hundreds of miles from the blast. |
| h | - Hour |
| Hz | - Hertz (a unit of frequency, expressed in cycles per second). |
| kW | - Kilowatts (1,000 watts). |
| MPI | - Multiple power input |
| scfm | - Standard cubic feet per minute - Cubic feet of air flow per minute at 14.69 psi and 58.73 °F conditions. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

Wet bulb temperature - Wet bulb temperature is the evaporating water temperature measured by a thermometer, whose bulb is covered by a water-saturated wick, when air is passed over the bulb. It is used with dry bulb temperature to determine humidity.

Wg - Water gage - Pressure, in inches of water. On the data sheets, this is used to express the external static pressure on the A/C evaporator when describing conditions at which A/C conditioned air flow was measured.

4. GENERAL INFORMATION

4.1 Capacity. All air conditioners have been capacity tested in accordance with American Society of Heating, Refrigerating and Air Conditioning Engineers (ASHRAE) procedures using the temperatures specified in the climatic conditions for capacity ratings listed for each unit.

4.2 Design. All air conditioners, with the exception of the 54,000 DEPMED and 18,000 trailer mounted A/C, covered by this standard have been designed for installation inside or outside of vans, stationary and mobile shelters, and similar enclosures, provided unrestricted outdoor ambient air is available to the unit for proper operation. The 54,000 DEPMED and 18,000 trailer mounted A/C's are designed to be stationary ground units with cool air supplied to shelters by ducts.

4.3 Reduction in air flow. A reduction in the unit's rated air flow and cooling performance can be expected should the static pressure, as specified on item 16 of the figures, be exceeded by the installation of external ducts, filters, registers, or other devices which restrict the flow of air to and from the A/C. Air flow and cooling capacity for the 54,000 DEPMED and 18,000 trailer mounted A/C are rated with ducts installed.

5. DETAIL REQUIREMENTS

5.1 The standard family of military air conditioners. The standard family consists of 28 units ranging from 6,000 Btuh cooling/4,500 Btuh heating to 60,000 Btuh cooling/47,000 Btuh heating. These units are arranged by this standard into six categories: compact vertical, compact horizontal, split-package, MPI's, 18,000 trailer mount, and the 54,000 DEPMED. All units cool, dehumidify and heat. The heating capacity was designed so that the power demand in the heating mode approximates that of the cooling mode.

5.1.1 Compact air conditioners. The compact air conditioners are intended to satisfy the majority of requirements of the Field Army. They are designed for minimum size and weight, standardization of components, minimum power requirement, a tolerance of variations in power supply, and maximum reliability and maintainability consistent with their relatively small interior volume. Their features include:

a. Rugged construction and able to withstand high levels of shock and vibration.
b. Automatically controlled heating as well as cooling.
c. Compatibility with collective protection systems.
d. Fresh air ventilation with or without cooling or heating.
e. Self-protection against abnormal temperatures.
f. Self-protection against cutoff of condenser air flow.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

g. Compatibility with sensitive electronic systems. A hot gas bypass control system enables precise air conditioning without cyclic disturbance of the external power supply circuit.

h. The MPI units are equipped with soft start capabilities eliminating the need for a hot gas bypass control system.

5.1.2 Compact vertical air conditioners. The vertical air conditioners have their maximum dimension in the vertical direction for applications where available space and the specific cooling requirement dictate a relatively narrow, tall unit. There are five vertical units with a total of twelve different electrical models or classes; these are depicted in figure 1.

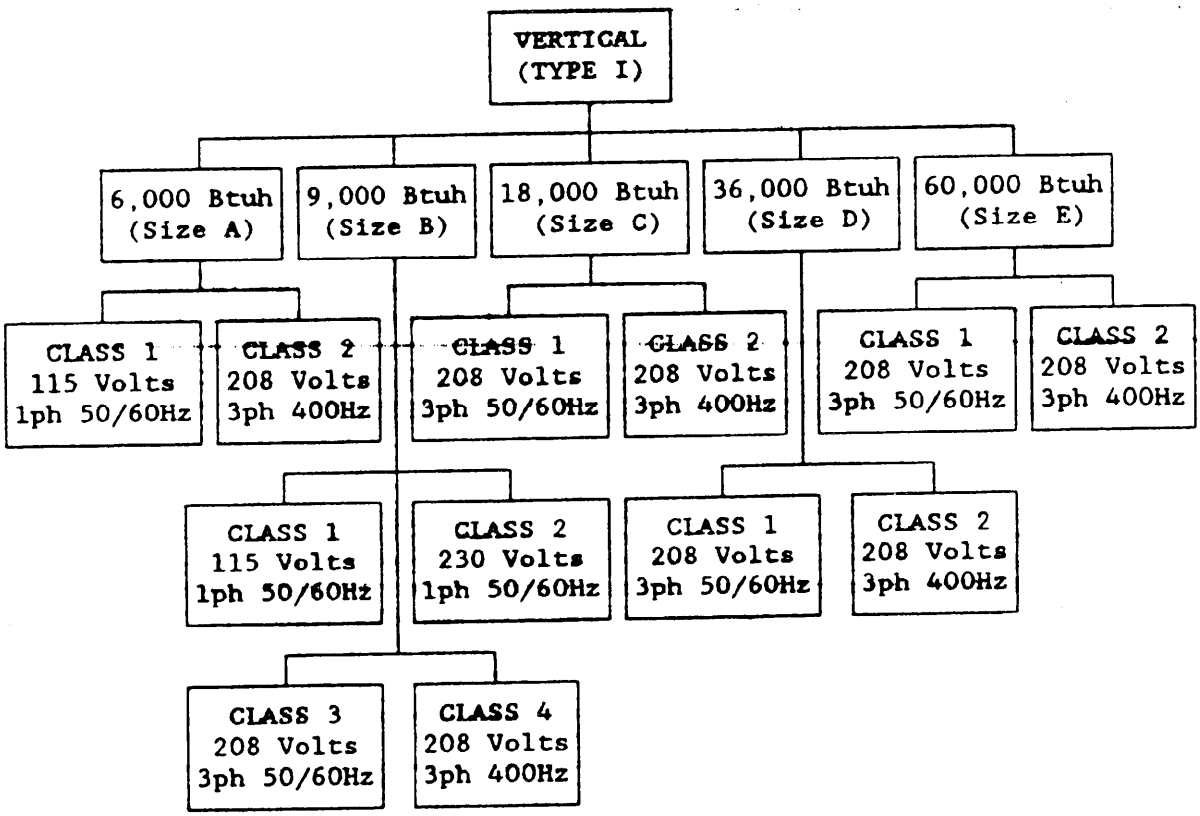



Figure 1. Compact vertical air conditioners.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

5.1.3 Compact horizontal air conditioners. The horizontal units are designed with their maximum dimension in the horizontal direction. There are three horizontal sizes with nine classes, as shown in figure 2.

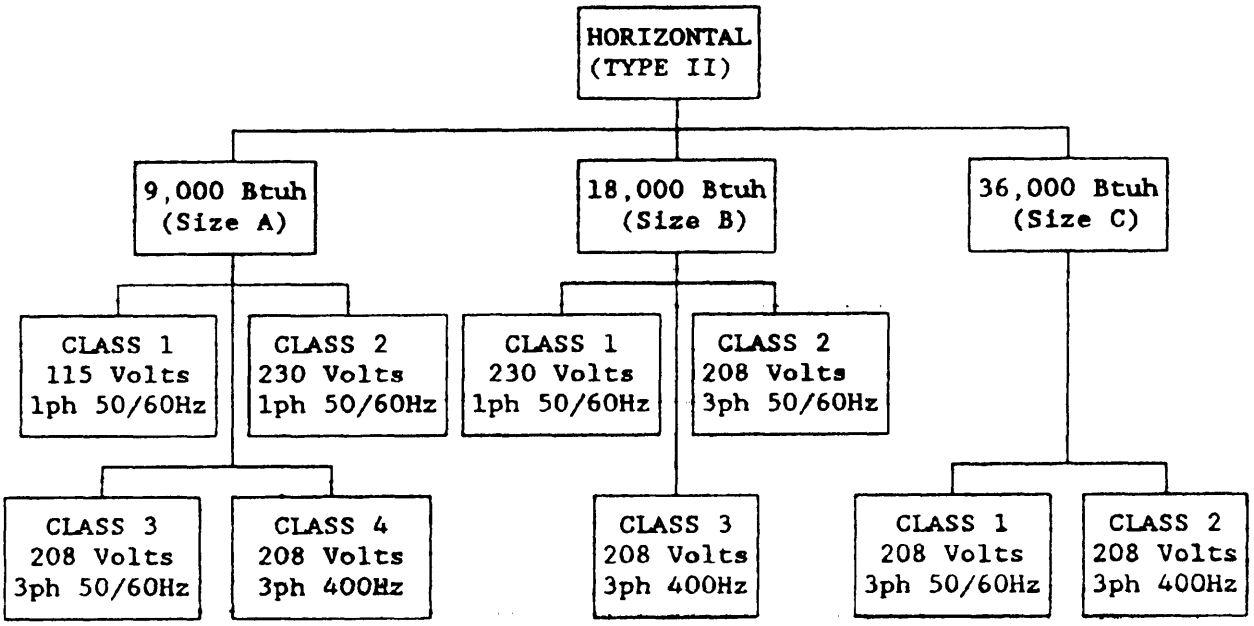



Figure 2. Compact horizontal air conditioners.

5.1.4 Split-package air conditioner. The split package unit is a single 18,000 Btuh air conditioner that is constructed in two parts: an evaporator section and a condenser section. This design permits the user to configure the package vertically or horizontally or with the condenser section operating remotely from the evaporator, for example, on the outside of a wall. The split package unit has the operational features of the compact air conditioners although it is approximately one-third larger and one-third heavier than the equivalent compact units. The split package unit is designed with protection against EMP.

5.1.5 MPI air conditioners. The MPI units are constructed following the vertical and horizontal units design and application. These units are capable of operating on multiple power inputs, subsequently the name, MPI. There are two vertical units and two horizontal units with power characteristics as shown in figures 3 and 4.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

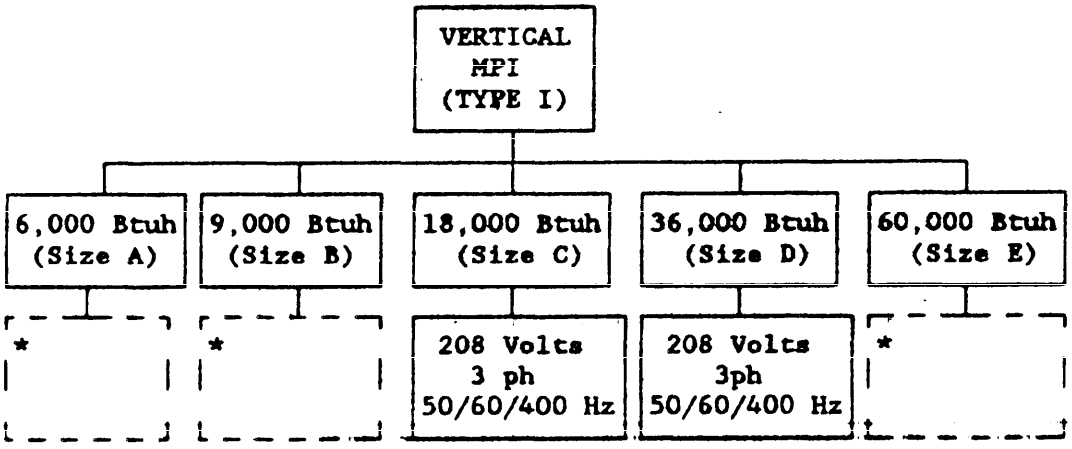
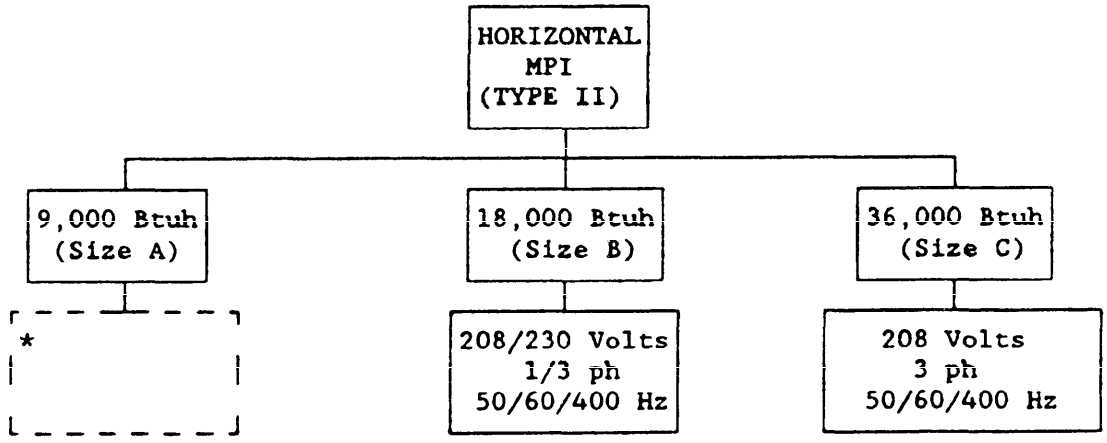



Figure 3. Vertical multiple power input air conditioner.

* Future development planned.




* Future development planned.

Figure 4. Horizontal multiple power input air conditioners.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

5.1.6 Trailer mounted 18,000 Btuh A/C. The self-contained mobile trailer mounted 18,000 Btuh A/C consists of a single horizontal compact 18,000 Btuh air conditioner and a single 10 kW diesel generator unit, both mounted onto a 3/4-ton single axle trailer. The conditioned air is supplied to shelters by two 12-foot-long by 12-inches diameter ducts, supply and return.

5.1.7 Deployable medical system (DEPMED) A/C. The DEPMEDS unit is a horizontal, duct type, 54,000 Btuh air conditioner that has a base mount design. This means that the unit, as opposed to mounting directly on the shelter, would sit on the ground beside the shelter. The conditioned air is supplied to the shelter by two 15-inch diameter flexible ducts, supply and return.

5.1.8 Detailed drawings. Figures 5 through 19 contain general application characteristics for each type of unit: Figures 5 through 7 for horizontal compact units; figures 8 through 12 for vertical compact units; figure 13 for the split-package unit; figures 14 through 17 for MPI units; figure 18 for the trailer mounted 18,000 Btuh unit; and figure 19 for the DEPMED unit. Consult applicable military specification for complete dimensions and installation data.

5.2 Method of reference. Reference to models should include the military specification, type, size, and classes of the desired air conditioner; this information may be found on the figures provided herein.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

AIR CONDITIONER: COMPACT, TYPE II (HORIZONTAL), SIZE A (9,000 BTUH)

| | | | | | | |
|---|---|---|---|---|---|---|
| 1. | Military specification | | MIL-A-52767 | | | |
| 2. | Operating temperature range | | Cooling: 0 to 120 °F<br>Heating: -50 to 80 °F | | | |
| 3. | Control | | Internal or remotely mounted control panel | | | |
| 4. | Mounting | | Base mounted | | | |
| 5. | Refrigerant | | Monochlorodifluoromethane (R-22) | | | |
| | Electrical class | | 1 | 2 | 3 | 4 |
| 6. | Top Assembly Drawing | | TA13225E8445 | TA13225E8450 | TA13225E8455 | TA13225E8460 |
| 7. | National stock number | | 4120-00-916-9404 | 4120-00-903-3569 | 4120-00-963-4447 | 4120-00-951-1091 |
| 8. | Line item number | | A23828 | A23988 | A23955 | A23970 |
| 9. | SSN | | M773 | M716 | M916 | M915 |
| 10. | Rated cooling capacity | | 10,000 Btuh | 10,000 Btuh | 10,000 Btuh | 10,000 Btuh |
| 11. | Rated heating capacity | | 7,000 Btuh | 7,000 Btuh | 7,000 Btuh | 7,000 Btuh |
| 12. | | Volts, AC | 115 | 230 | 208 | 208 |
| | | Phase | 1 | 1 | 3 | 3 |
| | | Frequency, Hz | 50/60 | 50/60 | 50/60 | 400 |
| | | Wires | 3 | 3 | 4 | 4 |
| 13. | Max power consumption | | 3.22 kW | 3.22 kW | 3.0 kW | 3.1 kW |
| 14. | Minumum power factor | | 0.85 | 0.90 | 0.71 | 0.45 |
| 15. | Starting current | Peak duration | | | | |
| 16. | Condition air flow at 0 inches wg | | 370 scfm | 370 scfm | 370 scfm | 370 scfm |
| 17. | Gross weight | | 200 lbs | 200 lbs | 200 lbs | 200 lbs |
| 18. | Power connector supplied | A/C | MS3100R18 -11P | MS3100R18 -11P | MS3100R18 -11P | MS3100R18 -11P |
| | | Mating | MS3106R18 -11S | MS3106R18 -11S | MS3106R18 -11S | MS3106R18 -11S |

Figure 5. Horizontal compact unit, (9,000 Btuh).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

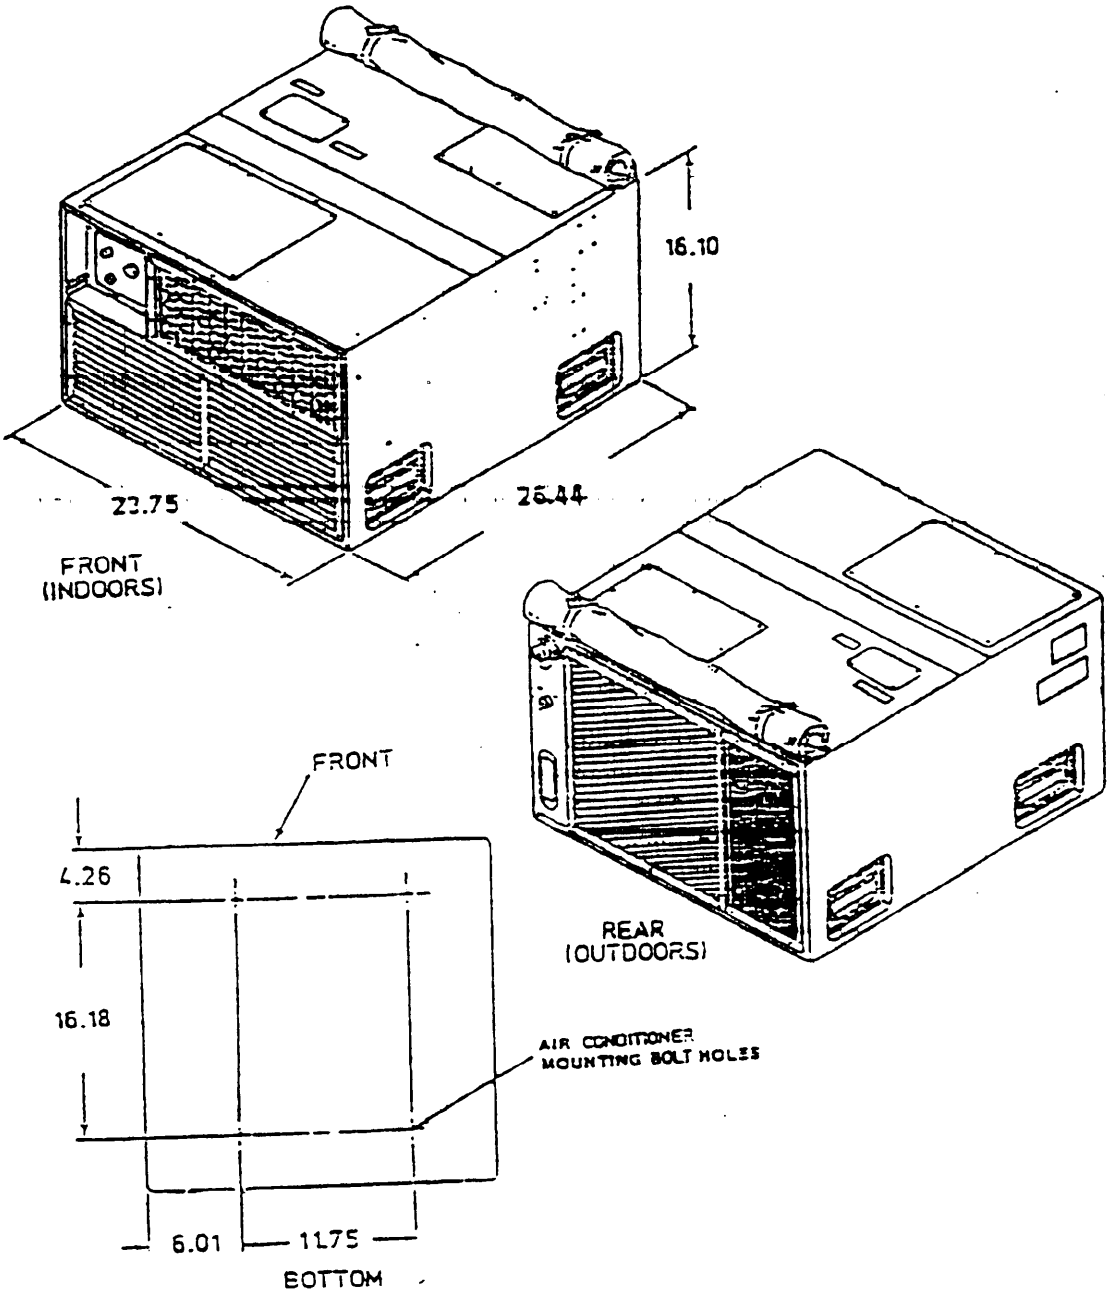



FIGURE 5. Horizontal compact unit, (9,000 Btuh) 208 volts, 3ph, 50/60/400 Hz. (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

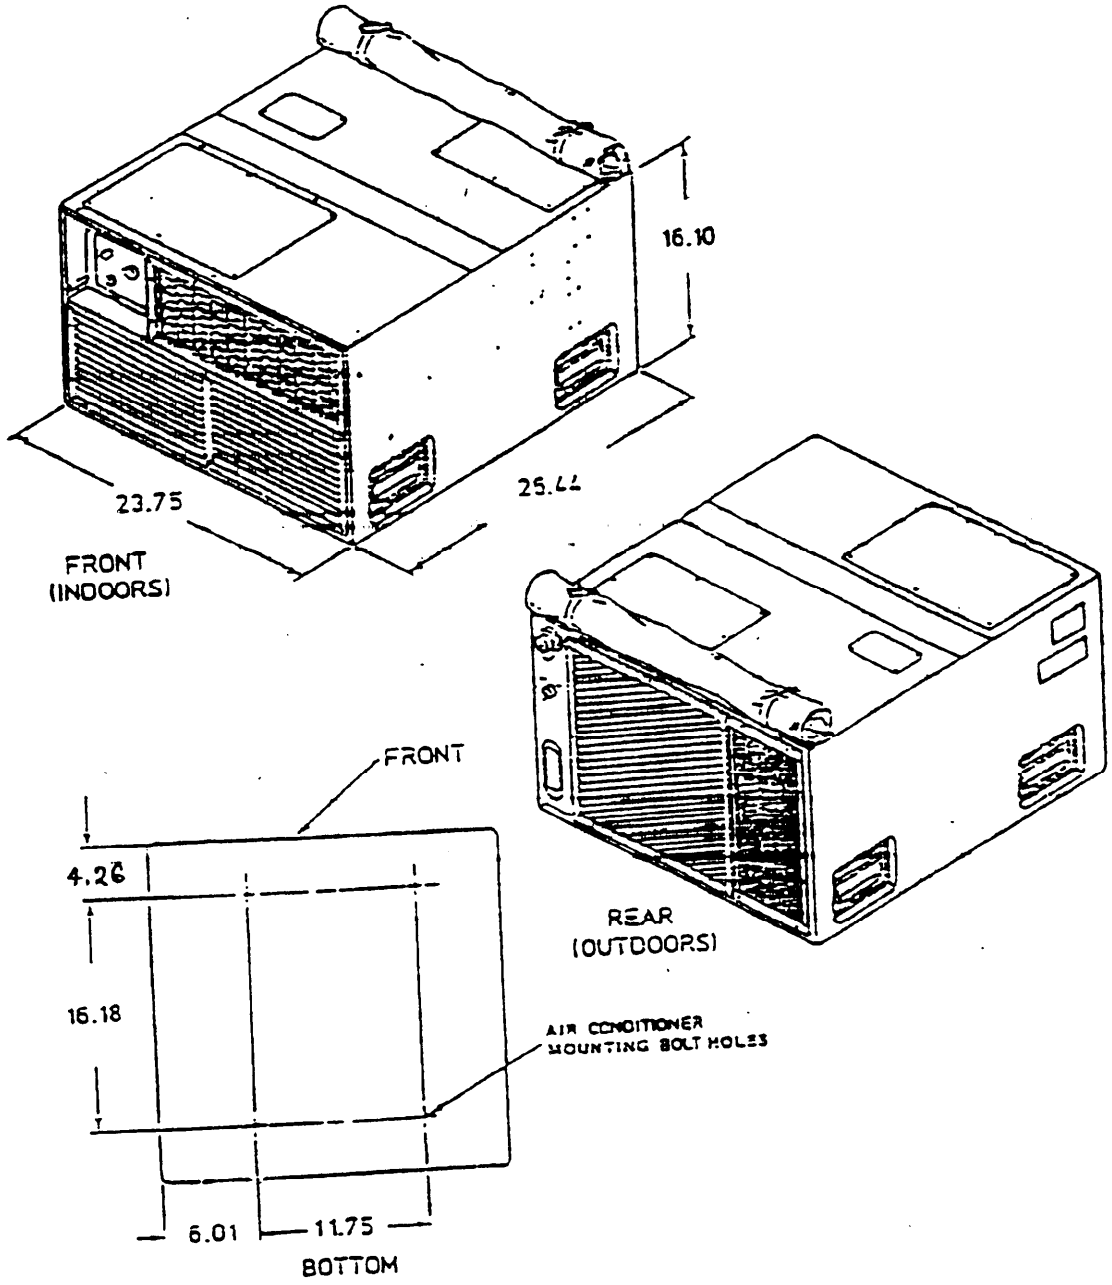



FIGURE 5. Horizontal compact unit, (9,000 Btuh) 115, 230 volts, 3ph, 50/60/400 Hz. (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

AIR CONDITIONER: COMPACT, TYPE II (HORIZONTAL), SIZE B (18,000 BTUH)

| | | | | | |
|---|---|---|---|---|---|
| 1. | Military specification | | MIL-A-52767 | | |
| 2. | Operating temperature range | | Cooling: 0 to 120 °F<br>Heating: -50 to 80 °F | | |
| 3. | Control | | Internal or remotely mounted control panel | | |
| 4. | Mounting | | Base mounted | | |
| 5. | Refrigerant | | Monochlorodifluoromethane (R-22) | | |
| | Electrical class | | 1 | 2 | 3 |
| 6. | Top Assembly Drawing | | TA13222E9150 | TA13222E9160 | TA13222E9170 |
| 7. | National stock number | | 4120-00-931-4518 | 4120-00-974-7206 | 4120-00-951-0948 |
| 8. | Line item number | | A24017 | A24463 | A24575 |
| 9. | SSN | | M917 | M918 | M896 |
| 10. | Rated cooling capacity | | 18,500 Btuh | 18,500 Btuh | 18,500 Btuh |
| 11. | Rated heating capacity | | 13,400 Btuh | 13,400 Btuh | 13,400 Btuh |
| 12. | | Volts, AC | 230 | 208 | 208 |
| | | Phase | 1 | 3 | 3 |
| | | Frequency, Hz | 50/60 | 50/60 | 400 |
| | | Wires | 3 | 4 | 4 |
| 13. | Max power consumption | | 5.0 kW | 4.6 kW | 5.0 kW |
| 14. | Minumum power factor | | 0.95 | 0.80 | 0.55 |
| 15. | Starting current | Peak duration | | | |
| 16. | Condition air flow at 0 inches wg | | 590 scfm | 590 scfm | 640 scfm |
| 17. | Gross weight | | 290 lbs | 290 lbs | 290 lbs |
| 18. | Power connector supplied | A/C | MS3100R18-11P | MS3100R18-11P | MS3100R18-11P |
| | | Mating | MS3106R18-11S | MS3106R18-11S | MS3106R18-11S |

Figure 6. Horizontal compact unit, (18000 Btuh).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

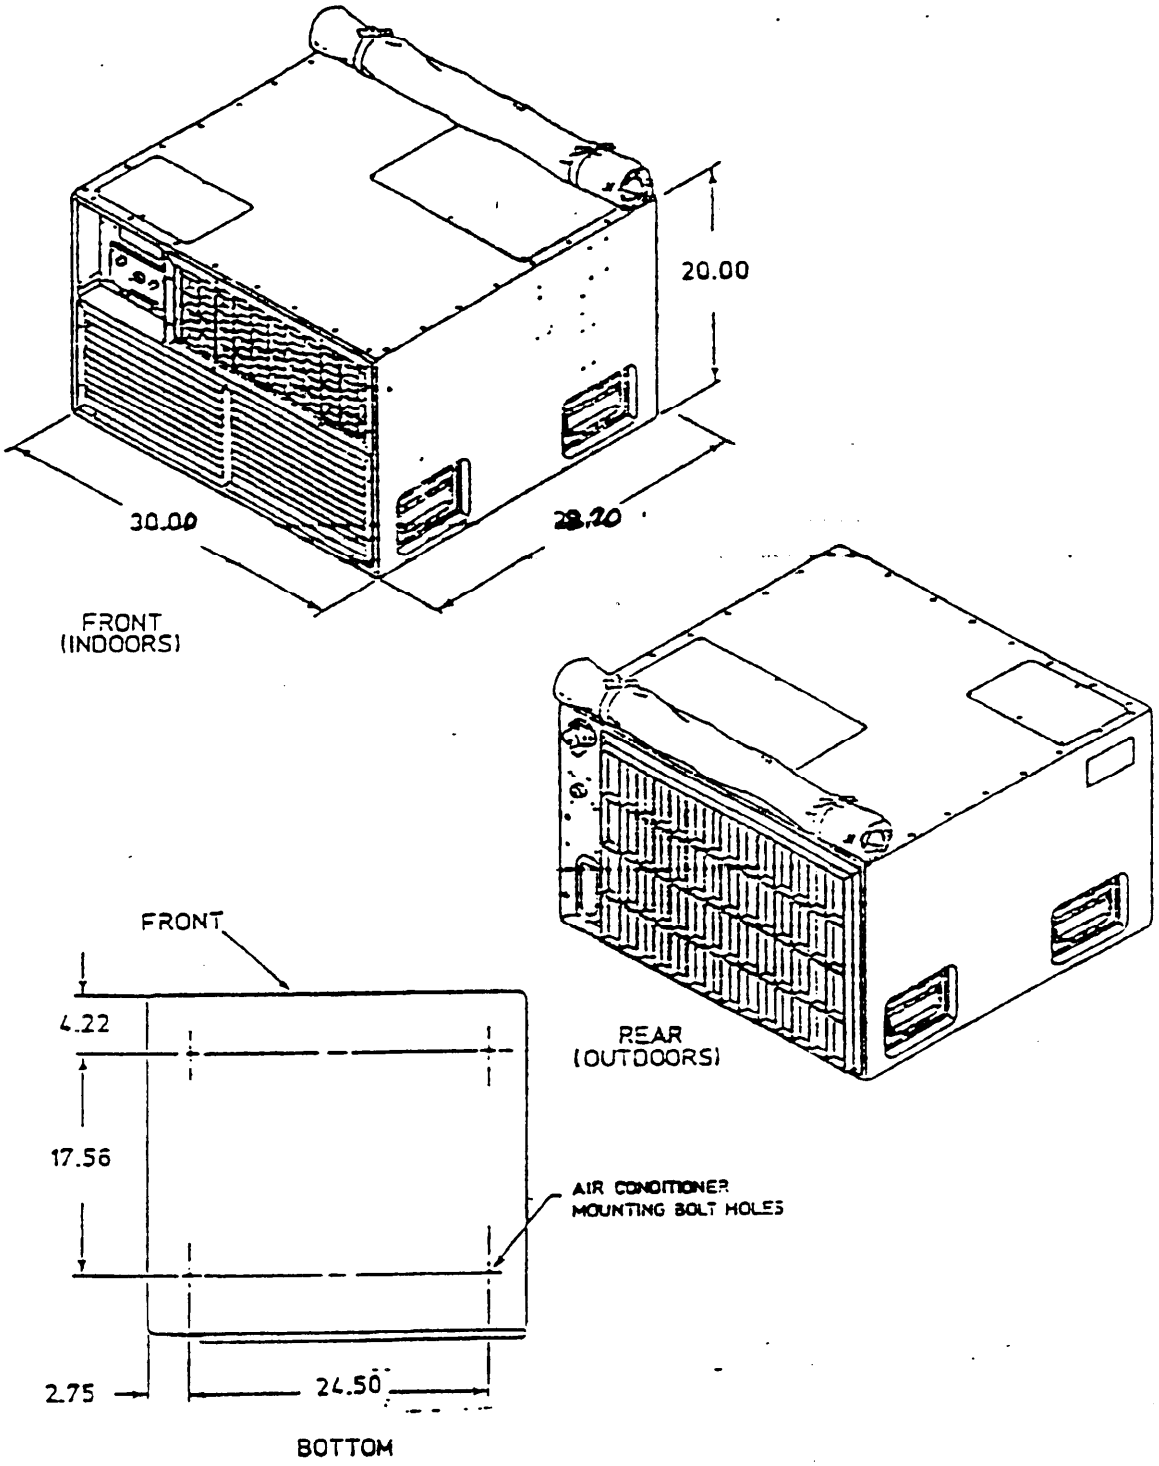



FIGURE 6. Horizontal compact unit, (18,000 Btuh) 208 volts, 3ph, 50/60 Hz. (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

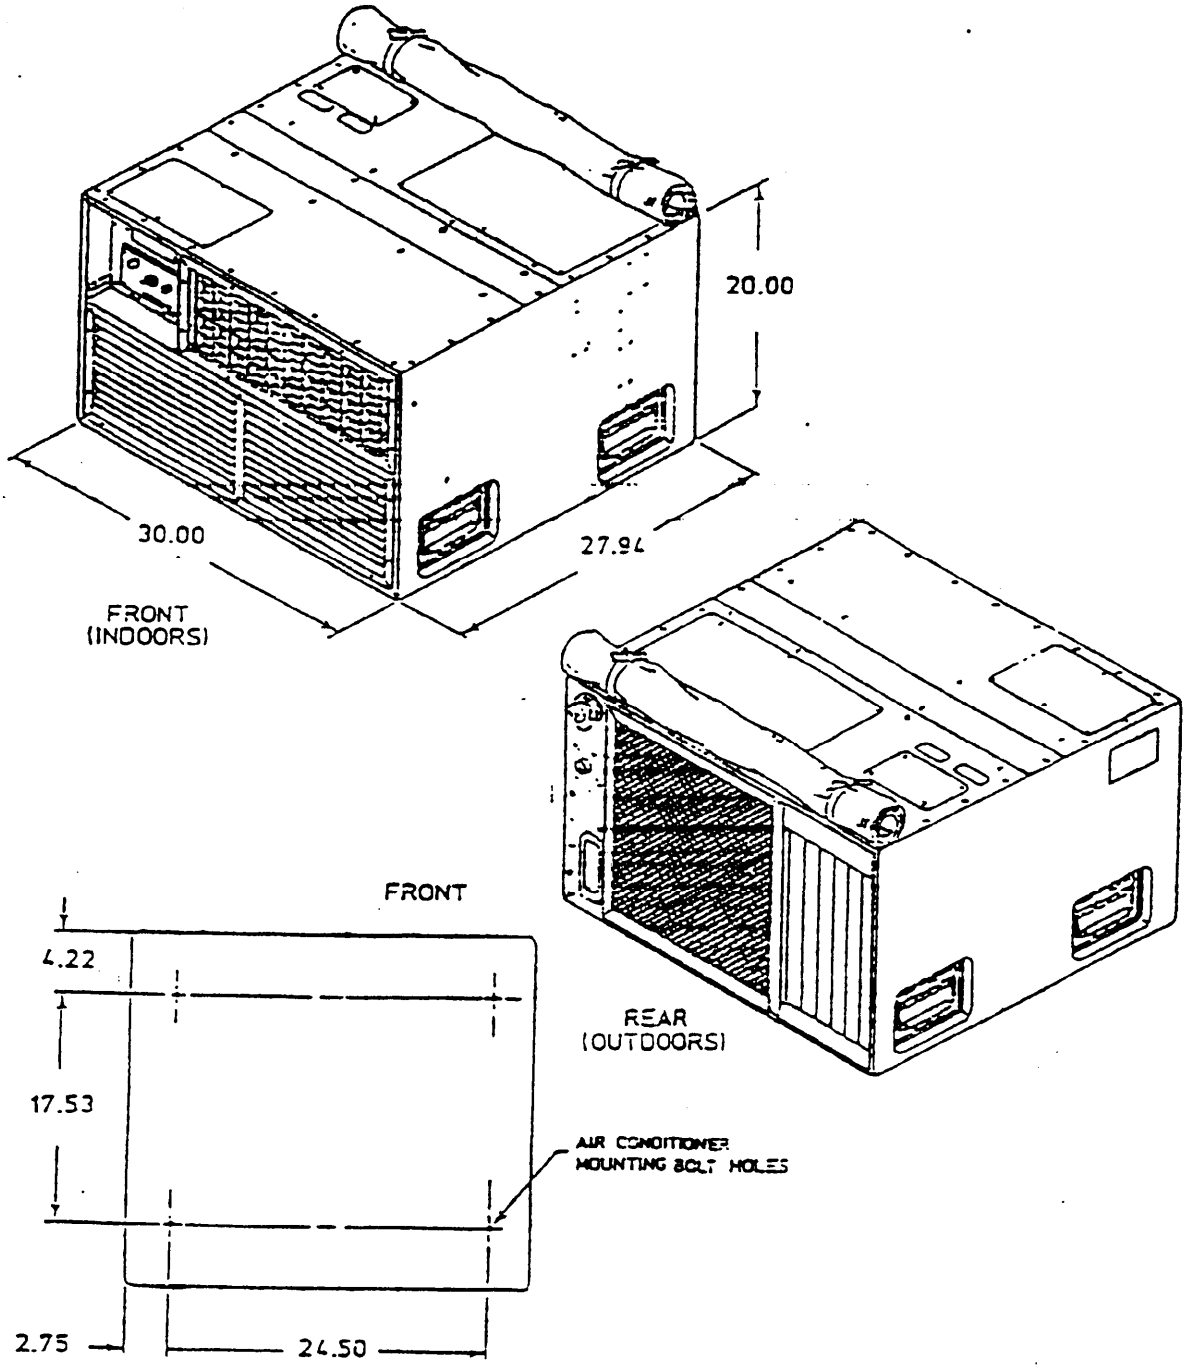



**FIGURE 6.** Horizontal compact unit, (18,000 Btuh) 230 volts, 1ph, 50/60 Hz. (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

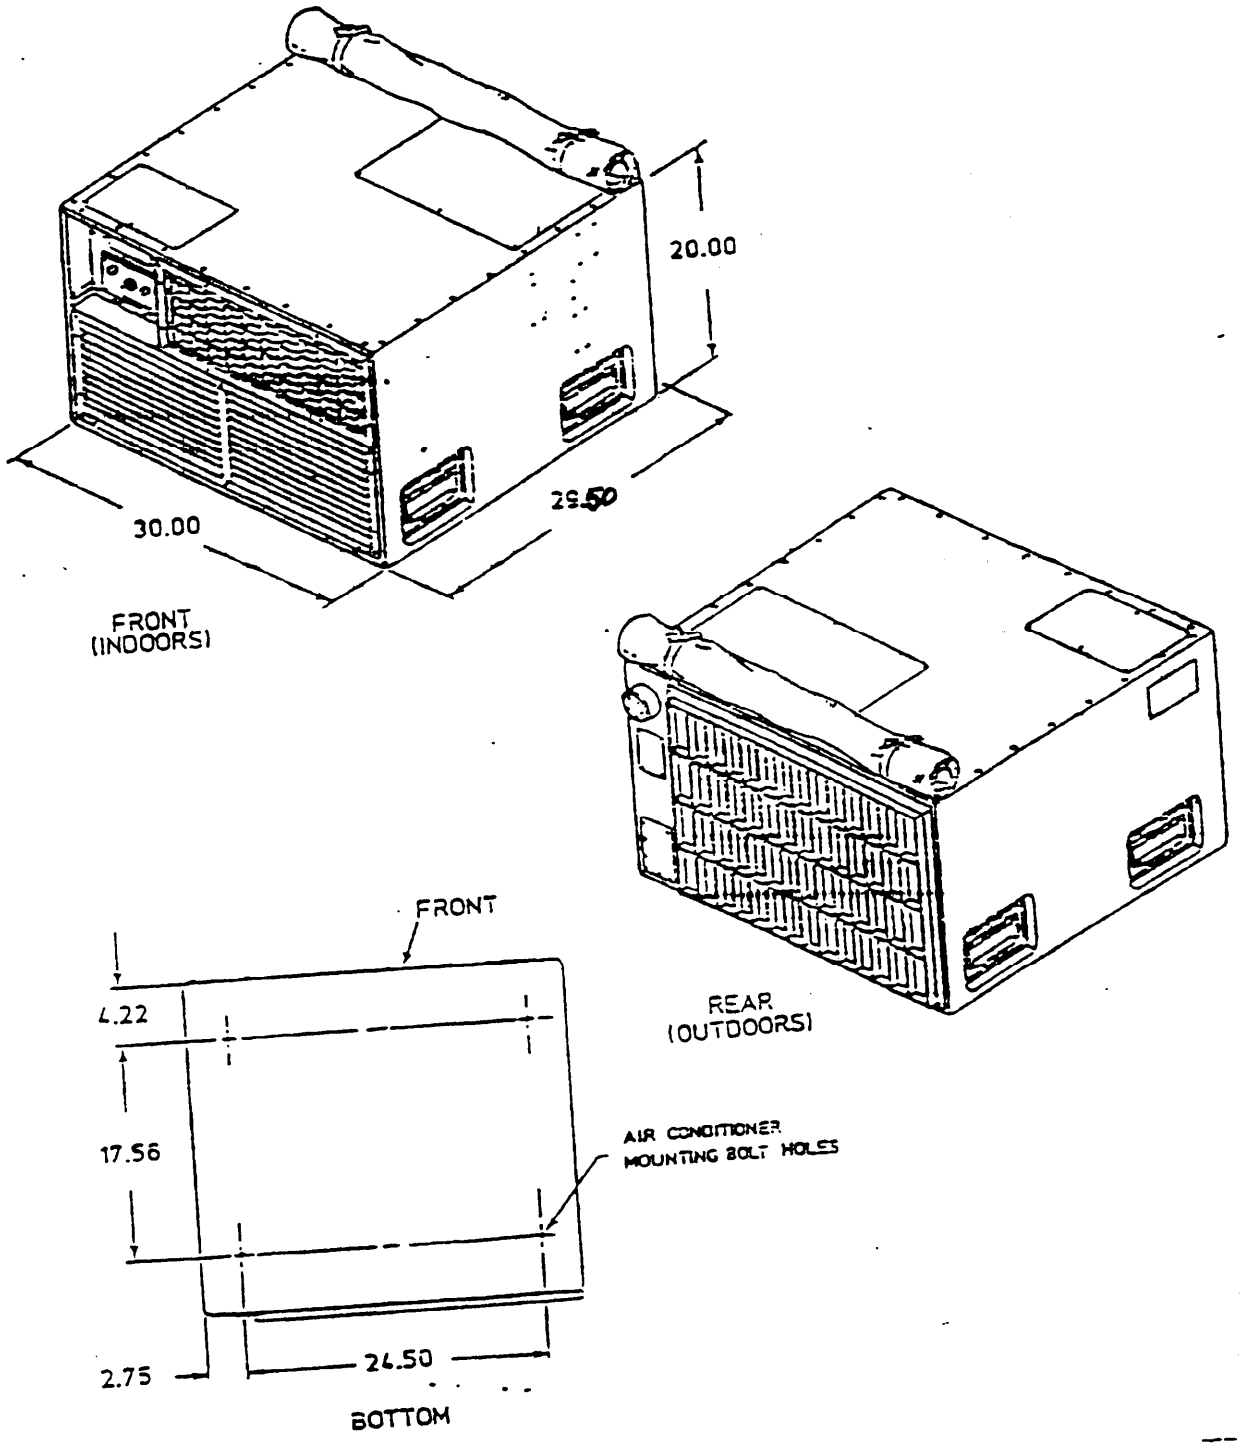



FIGURE 6. Horizontal compact unit, (18,000 Btuh) 208 volts, 3ph, 50/60 Hz, EMP protected. (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

AIR CONDITIONER: COMPACT, TYPE II (HORIZONTAL), SIZE C (36,000 BTUH)

| | | | | |
|---|---|---|---|---|
| 1. | Military specification | | MIL-A-52767 | |
| 2. | Operating temperature range | | Cooling: -25 to 120 °F<br>Heating: -50 to 80 °F | |
| 3. | Control | | Internal or remotely mounted control panel | |
| 4. | Mounting | | Base mounted | |
| 5. | Refrigerant | | Monochlorodifluoromethane (R-22) | |
| | Electrical class | | 1 | 2 |
| 6. | Top Assembly Drawing | | TA13225E9500 | TA13225E9600 |
| 7. | National stock number | | 4120-00-951-9697 | 4120-00-951-1055 |
| 8. | Line item number | | A24763 | A24820 |
| 9. | SSN | | M811 | M812 |
| 10. | Rated cooling capacity | | 41,000 Btuh | 41,000 Btuh |
| 11. | Rated heating capacity | | 31,200 Btuh | 34,700 Btuh |
| 12. | | Volts, AC | 208 | 208 |
| | | Phase | 3 | 3 |
| | | Frequency, Hz | 50/60 | 400 |
| | | Wires | 4 | 4 |
| 13. | Max power consumption | | 13.5 kW | 13.5 kW |
| 14. | Minumum power factor | | 0.83 | 0.64 |
| 15. | Starting current | Peak duration | | |
| 16. | Condition air flow at 0 inches wg | | 1380 scfm | 1520 scfm |
| 17. | Gross weight | | 435 lbs | 435 lbs |
| 18. | Power connector supplied | A/C | MS3100R24-22P | MS3100R24-22P |
| | | Mating | MS3106R24-22S | MS3106R24-22S |

Figure 7. Horizontal compact unit, (36,000 Btuh).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

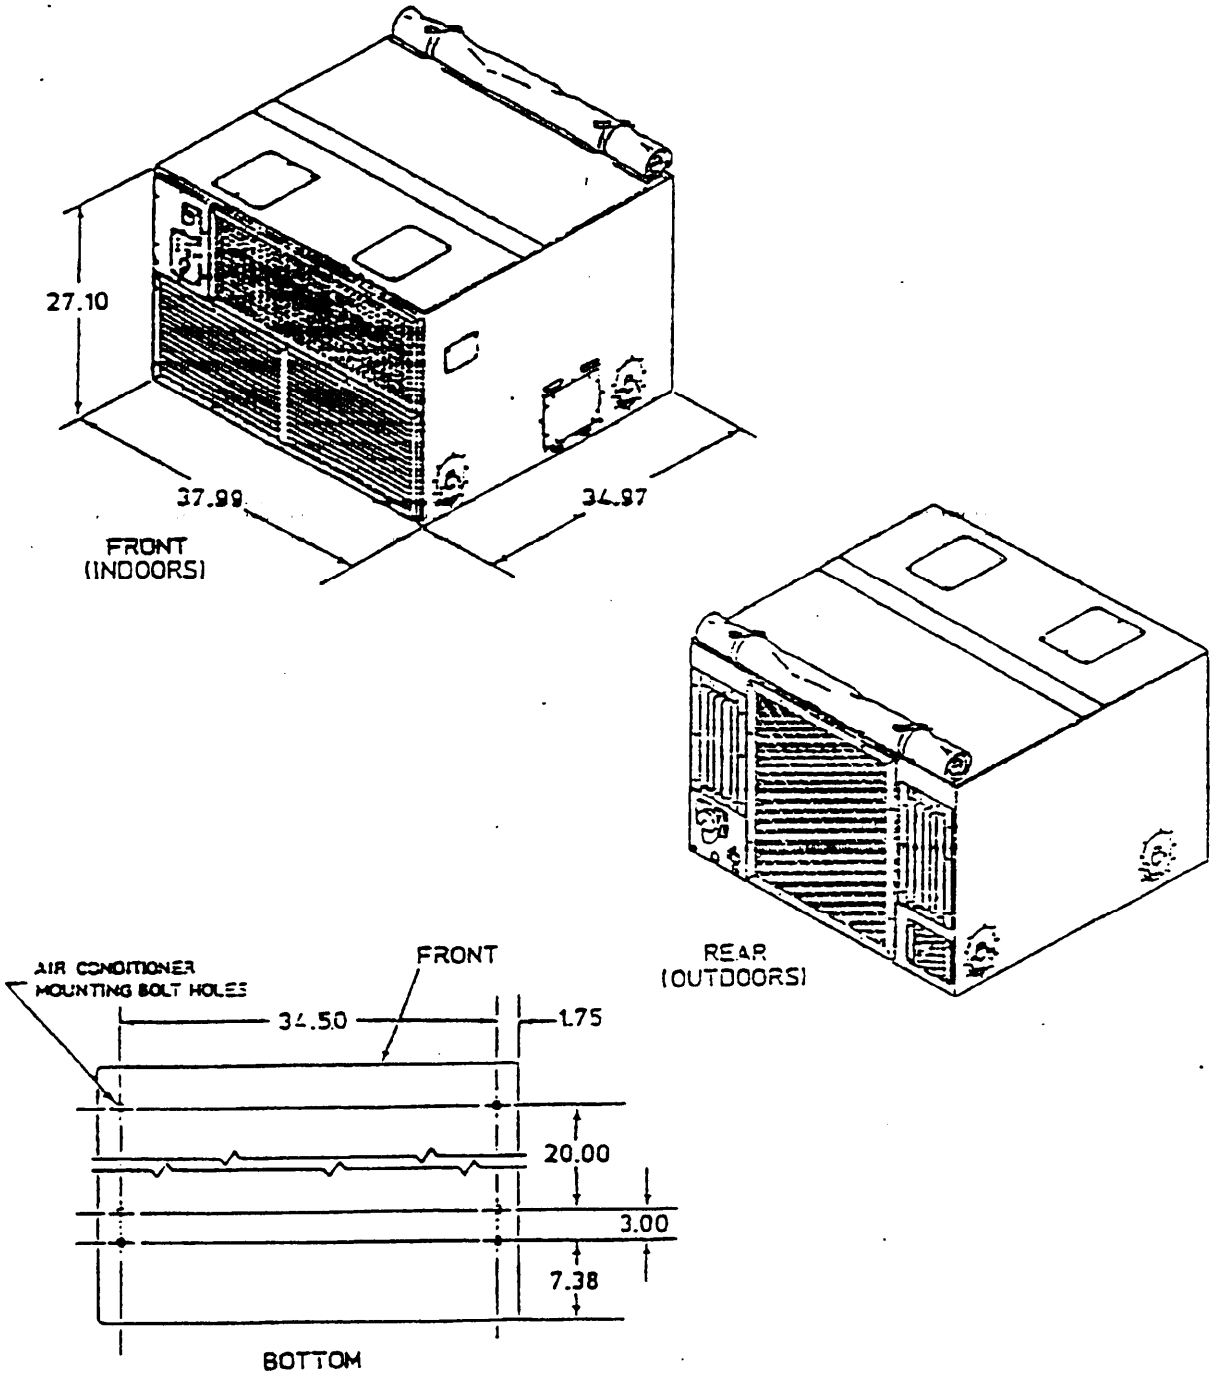



FIGURE 7. Horizontal compact unit, (36,000 Btuh) 208 volts, 3ph, 50/60 Hz. (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

AIR CONDITIONER: COMPACT, TYPE I (VERTICAL), SIZE A (6,000 BTUH)

| | | | | |
|---|---|---|---|---|
| 1. | Military specification | | MIL-A-52767 | |
| 2. | Operating temperature range | | Cooling: 55 to 120 °F<br>Heating: -50 to 80 °F | |
| 3. | Control | | Internal or remotely mounted control panel | |
| 4. | Mounting | | Base mounted; additional fastening at upper rear | |
| 5. | Refrigerant | | Monochlorodifluoromethane (R-22) | |
| | Electrical class | | 1 | 2 |
| 6. | Top Assembly Drawing | | TA13218E9890 | TA13218E9880 |
| 7. | National stock number | | 4120-00-926-1139 | 4120-00-926-1138 |
| 8. | Line item number | | A23667 | A23684 |
| 9. | SSN | | M702 | M701 |
| 10. | Rated cooling capacity | | 6,300 Btuh | 6,300 Btuh |
| 11. | Rated heating capacity | | 4,500 Btuh | 4,500 Btuh |
| 12. | | Volts, AC | 115 | 208 |
| | | Phase | 1 | 3 |
| | | Frequency, Hz | 50/60 | 400 |
| | | Wires | 3 | 4 |
| 13. | Max power consumption | | 2.2 kW | 2.6 kW |
| 14. | Minumum power factor | | 0.90 | 0.50 |
| 15. | Starting current | Peak duration | | |
| 16. | Condition air flow at 0 inches wg | | 280 scfm | 300 scfm |
| 17. | Gross weight | | 180 lbs | 175 lbs |
| 18. | Power connector supplied | A/C | MS3100R20-4PX | MS3100R20-4PX |
| | | Mating | MS3106R20-4SX | MS3106R20-4SX |

Figure 8. Vertical compact unit, (6,000 Btuh).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

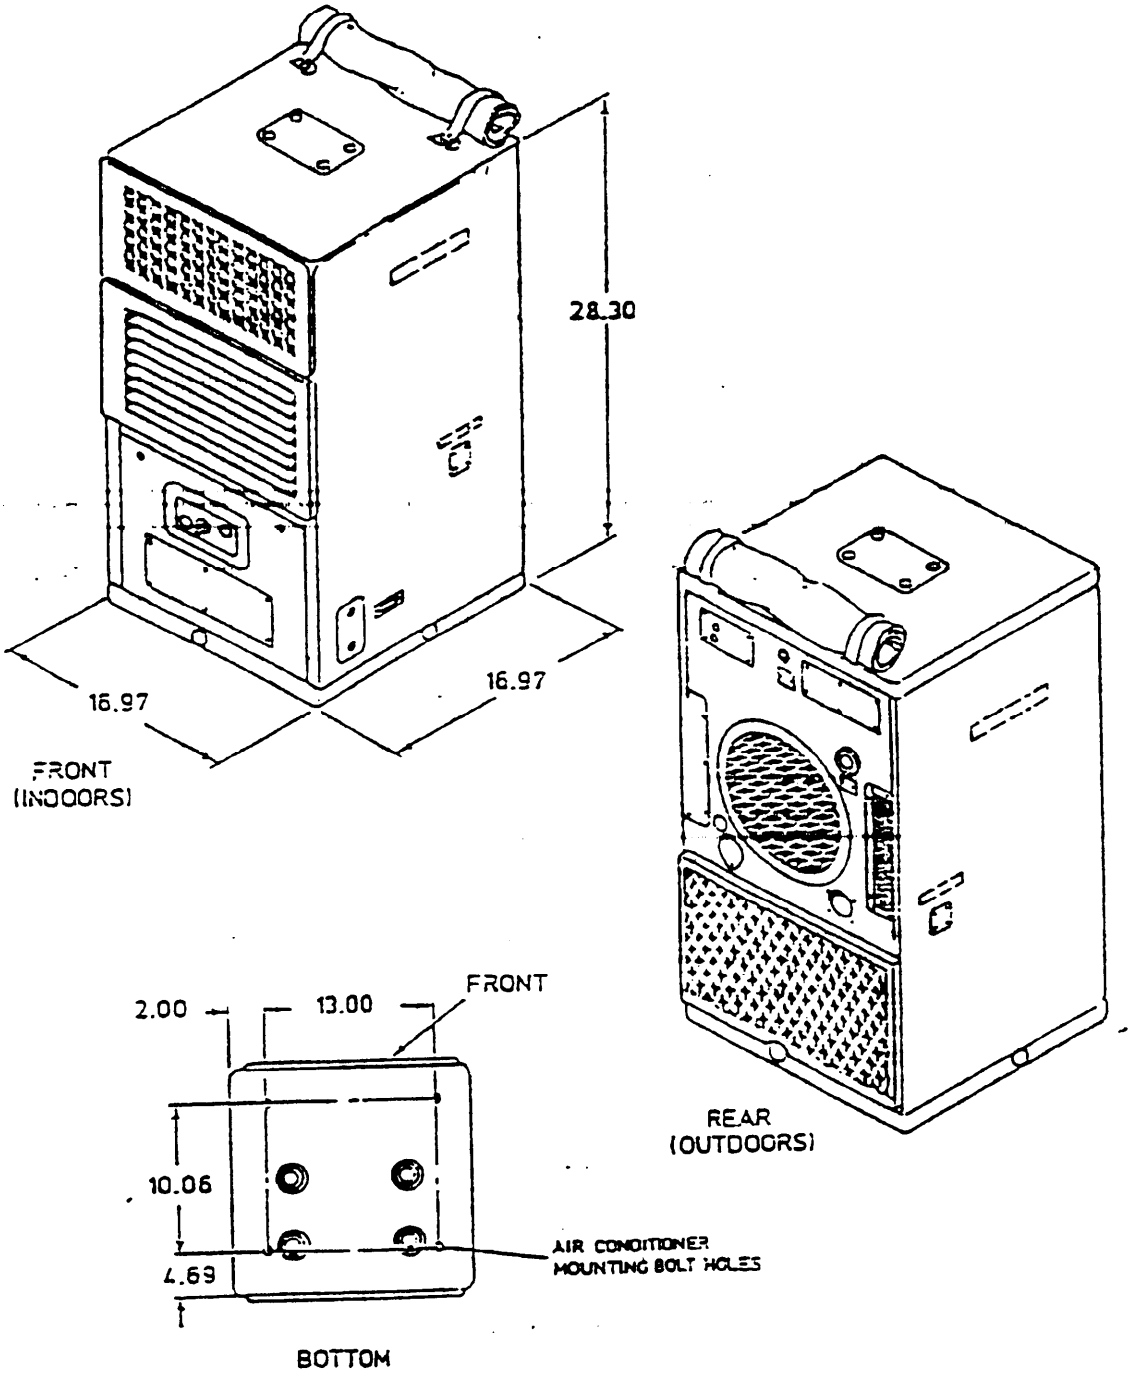



**FIGURE 8.** Vertical compact unit, (6,000 Btuh) 208 volts, 3ph, 400 Hz. (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

AIR CONDITIONER: COMPACT, TYPE I (VERTICAL), SIZE B (9,000 BTUH)

| | | | | | | |
|---|---|---|---|---|---|---|
| 1. | Military specification | | MIL-A-52767 | | | |
| 2. | Operating temperature range | | Cooling: 55 to 120 °F<br>Heating: -50 to 80 °F | | | |
| 3. | Control | | Internal or remotely mounted control panel | | | |
| 4. | Mounting | | Base mounted; additional fastening upper rear | | | |
| 5. | Refrigerant | | Monochlorodifluoromethane (R-22) | | | |
| | Electrical class | | 1 | 2 | 3 | 4 |
| 6. | Top Assembly Drawing | | TA13218E9905 | TA13218E9915 | TA13218E9910 | TA13218E9900 |
| 7. | National stock number | | 4120-00-926-1142 | 4120-00-926-1140 | 4120-00-926-1137 | 4120-00-926-1141 |
| 8. | Line item number | | A23838 | A23990 | A23960 | A23975 |
| 9. | SSN | | M912 | M891 | M910 | M911 |
| 10. | Rated cooling capacity | | 9,350 Btuh | 9,350 Btuh | 9,350 Btuh | 9,350 Btuh |
| 11. | Rated heating capacity | | 6,000 Btuh | 6,000 Btuh | 6,000 Btuh | 6,000 Btuh |
| 12. | | Volts, AC | 115 | 230 | 208 | 208 |
| | | Phase | 1 | 1 | 3 | 3 |
| | | Frequency, Hz | 50/60 | 50/60 | 50/60 | 400 |
| | | Wires | 3 | 3 | 4 | 4 |
| 13. | Max power consumption | | 3.6 kW | 3.4 kW | 3.4 kW | 3.6 kW |
| 14. | Minumum power factor | | 0.95 | 0.95 | 0.84 | 0.55 |
| 15. | Starting current | Peak duration | | | | |
| 16. | Condition air flow at 0 inches wg | | 335 scfm | 335 scfm | 335 scfm | 335 scfm |
| 17. | Gross weight | | 200 lbs | 200 lbs | 190 lbs | 190 lbs |
| 18. | Power connector supplied | A/C | MS3100R20 -4PX | MS3100R20 -4PX | MS3100R20 -4PX | MS3100R20 -4PX |
| | | Mating | MS3106R20 -4SX | MS3106R20 -4SX | MS3106R20 -4SX | MS3106R20 -4SX |

Figure 9. Vertical compact unit, (9,000 Btuh).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

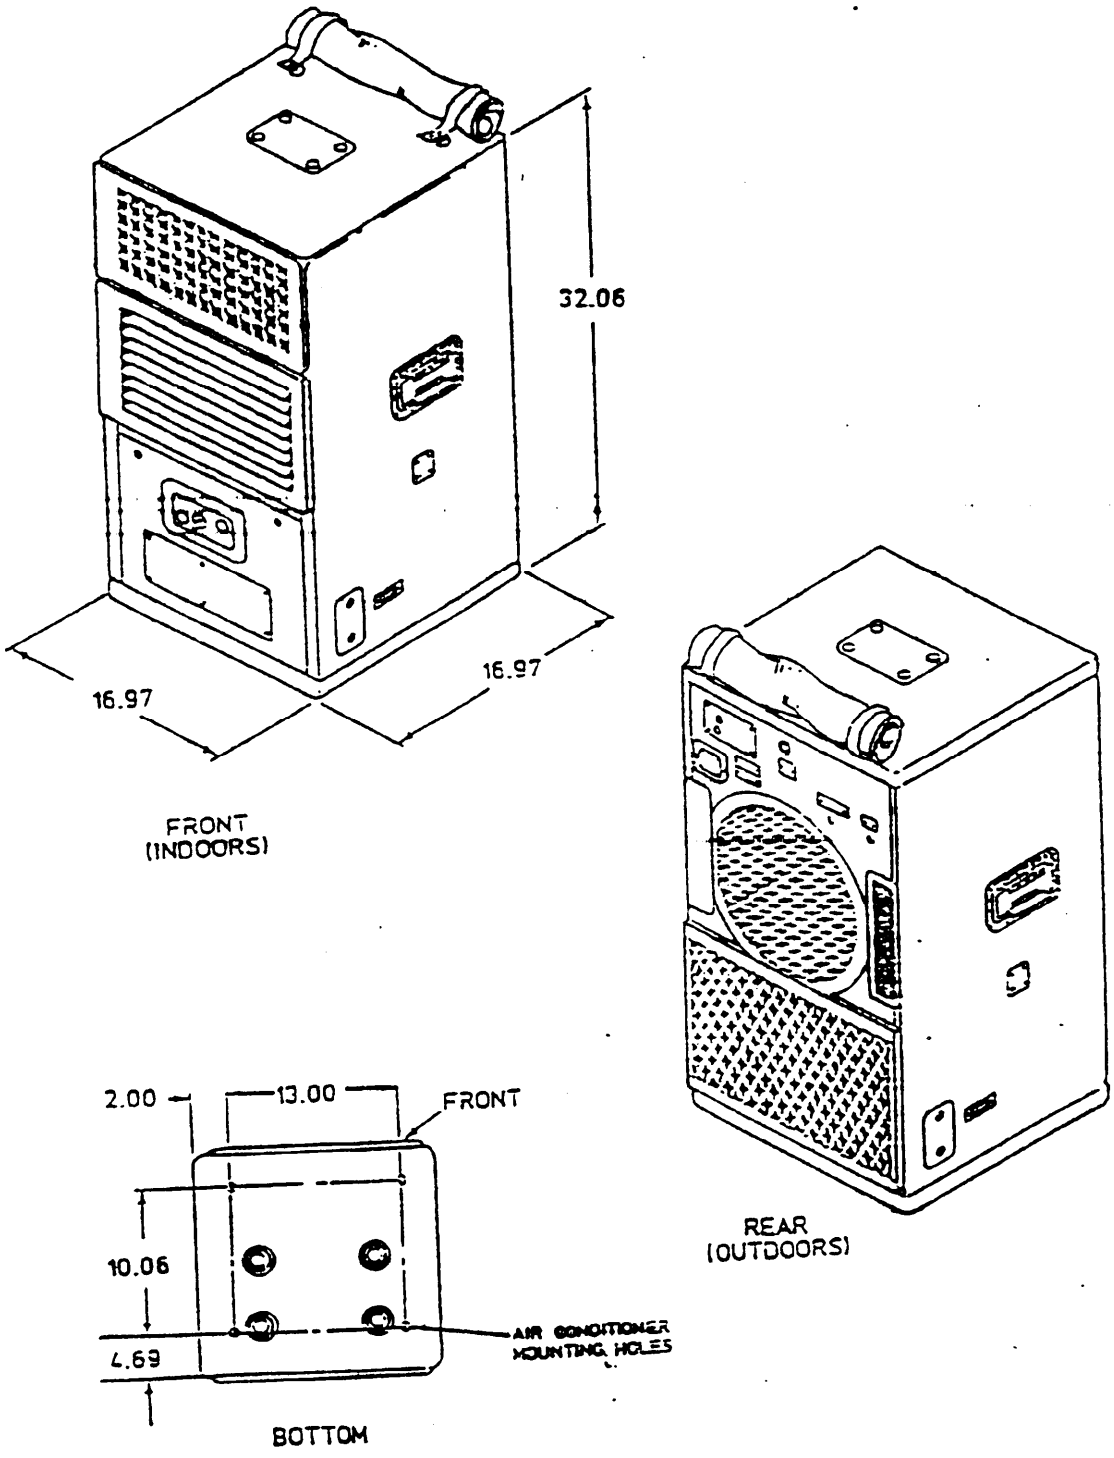



FIGURE 9. Vertical compact unit, (9,000 Btuh) 115 volts, 1ph, 50/60 Hz. (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

AIR CONDITIONER: COMPACT, TYPE I (VERTICAL), SIZE C (18,000 BTUH)

| | | | | |
|---|---|---|---|---|
| 1. | Military specification | | MIL-A-52767 | |
| 2. | Operating temperature range | | Cooling: 55 to 120 °F<br>Heating: -50 to 80 °F | |
| 3. | Control | | Internal or remotely mounted control panel | |
| 4. | Mounting | | Base mounted; additional fastening at upper rear | |
| 5. | Refrigerant | | Monochlorodifluoromethane (R-22) | |
| | Electrical class | | 1 | 2 |
| 6. | Top Assembly Drawing | | TA13225E8000 | TA13225E8010 |
| 7. | National stock number | | 4120-00-959-4453 | 4120-00-061-2869 |
| 8. | Line item number | | A24455 | A24592 |
| 9. | SSN | | M899 | M881 |
| 10. | Rated cooling capacity | | 18,500 Btuh | 18,500 Btuh |
| 11. | Rated heating capacity | | 12,000 Btuh | 12,000 Btuh |
| 12. | | Volts, AC | 208 | 208 |
| | | Phase | 3 | 3 |
| | | Frequency, Hz | 50/60 | 400 |
| | | Wires | 4 | 4 |
| 13. | Max power consumption | | 5.0 kW | 5.7 kW |
| 14. | Minumum power factor | | 0.90 | 0.60 |
| 15. | Starting current | Peak duration | | |
| 16. | Condition air flow at 0 inches wg | | 585 scfm | 615 scfm |
| 17. | Gross weight | | 280 lbs | 280 lbs |
| 18. | Power connector supplied | A/C | MS3100R22-22P | MS3100R22-22P |
| | | Mating | MS3106R22-22S | MS3106R22-22S |

Figure 10. Vertical compact unit, (18,000 Btuh).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

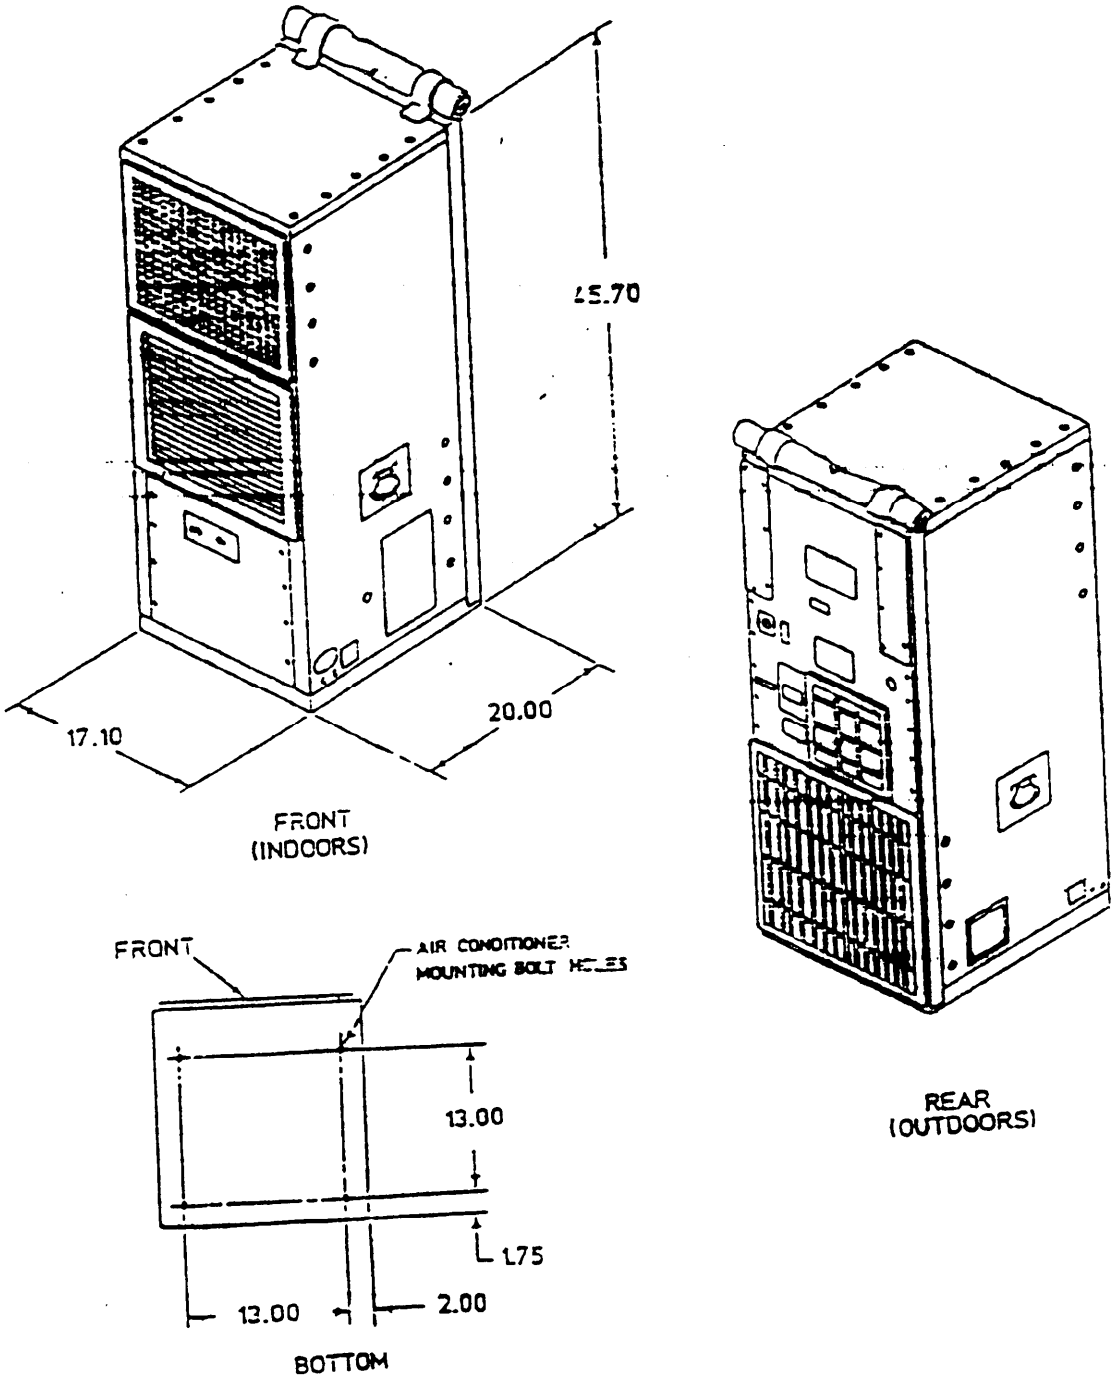



FIGURE 10. Vertical compact unit, (18,000 Btuh) 208 volts, 3ph, 50/60/400 Hz. (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

AIR CONDITIONER: COMPACT, TYPE I (VERTICAL), SIZE D (36,000 BTUH)

| | | | | |
|---|---|---|---|---|
| 1. | Military specification | | MIL-A-52767 | |
| 2. | Operating temperature range | | Cooling: 0 to 120 °F<br>Heating: -50 to 80 °F | |
| 3. | Control | | Internal or remotely mounted control panel | |
| 4. | Mounting | | Base mounted; additional fastening at upper rear | |
| 5. | Refrigerant | | Monochlorodifluoromethane (R-22) | |
| | Electrical class | | 1 | 2 |
| 6. | Top Assembly Drawing | | TA13225E8200 | TA13225E8210 |
| 7. | National stock number | | 4120-00-926-4136 | 4120-00-926-4137 |
| 8. | Line item number | | A24830 | A24934 |
| 9. | SSN | | M813 | M814 |
| 10. | Rated cooling capacity | | 37,800 Btuh | 37,800 Btuh |
| 11. | Rated heating capacity | | 28,600 Btuh | 28,600 Btuh |
| 12. | | Volts, AC | 208 | 208 |
| | | Phase | 3 | 3 |
| | | Frequency, Hz | 50/60 | 400 |
| | | Wires | 4 | 4 |
| 13. | Max power consumption | | 9.6 kW | 11.0 kW |
| 14. | Minumum power factor | | 0.83 | 0.60 |
| 15. | Starting current | Peak duration | | |
| 16. | Condition air flow at 0 inches wg | | 1250 scfm | 1360 scfm |
| 17. | Gross weight | | 460 lbs | 460 lbs |
| 18. | Power connector supplied | A/C | MS3100R24-22P | MS3100R24-22P |
| | | Mating | MS3106R24-22S | MS3106R24-22S |

Figure 11. Vertical compact unit, (36,000 Btuh).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

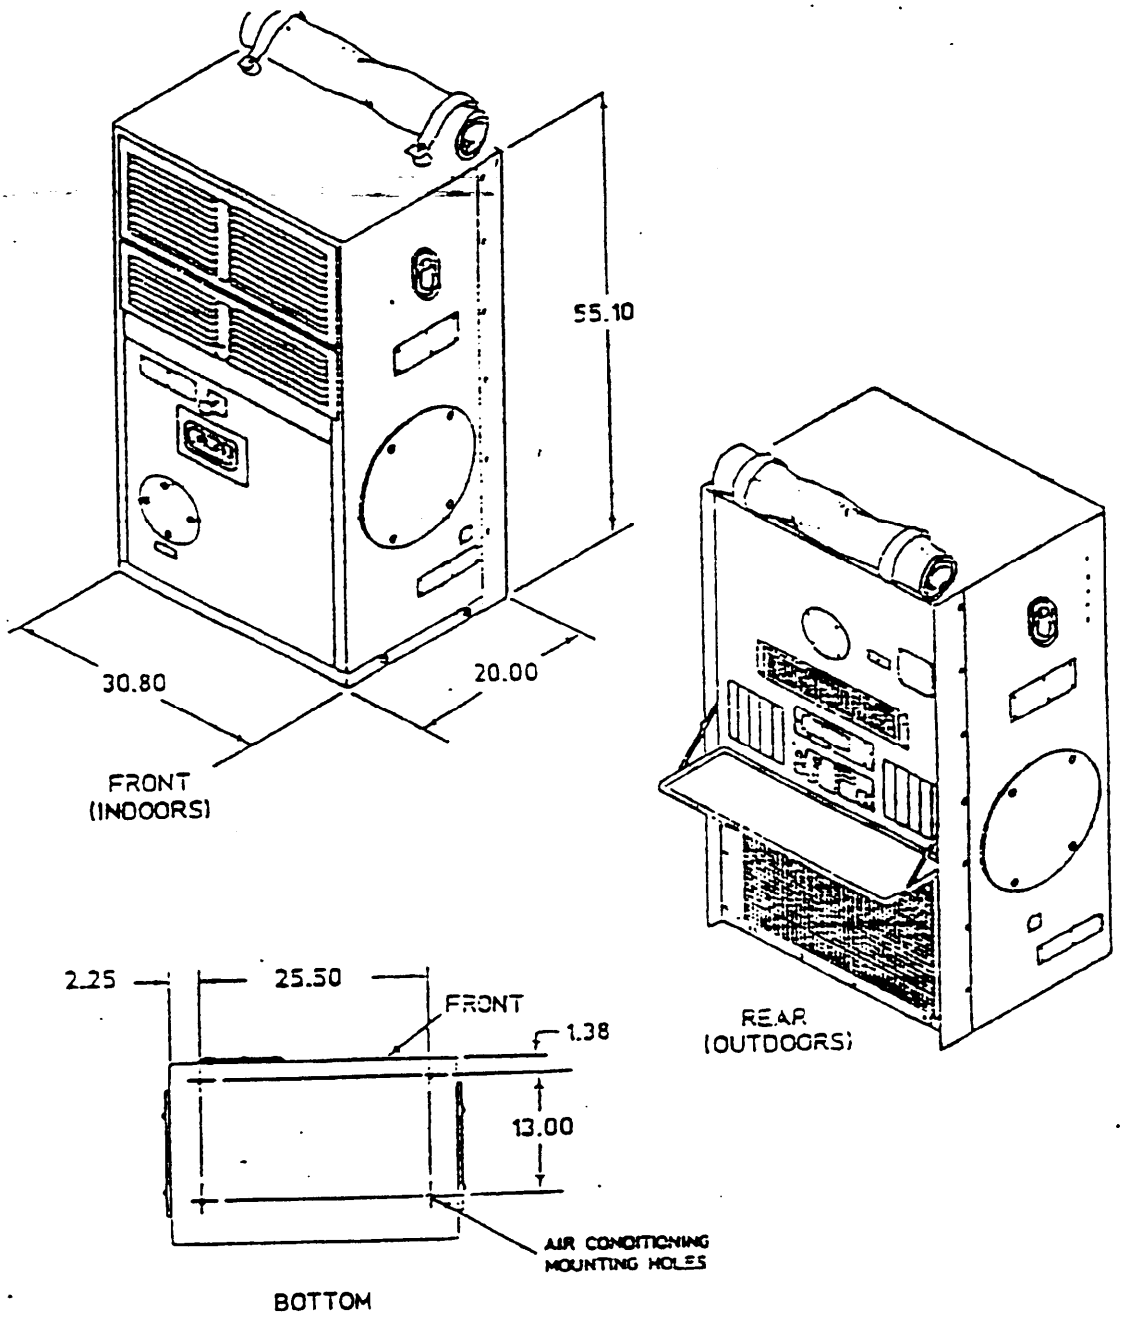



FIGURE 11. Vertical compact unit, (36,000 Btuh) 208 volts, 3ph, 50/60 Hz. (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

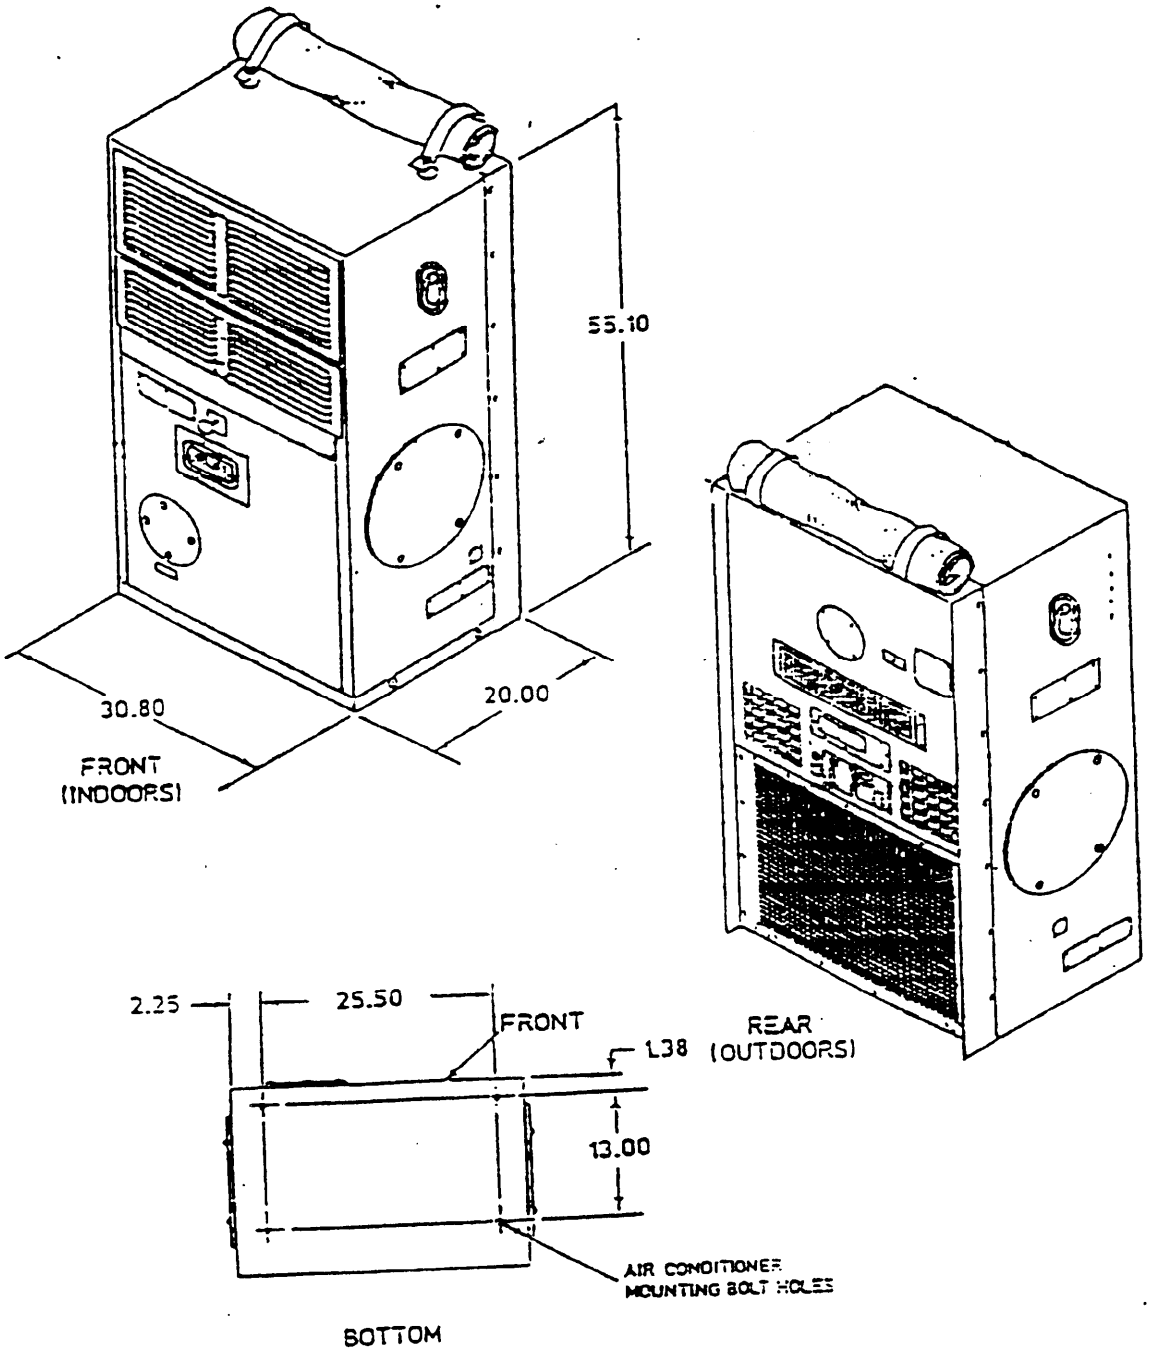



FIGURE 11. Vertical compact unit, (36,000 Btuh) 208 volts, 3ph, 400 Hz. (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

AIR CONDITIONER: COMPACT, TYPE I (VERTICAL), SIZE E (60,000 BTUH)

| | | | | |
|---|---|---|---|---|
| 1. | Military specification | | MIL-A-52767 | |
| 2. | Operating temperature range | | Cooling: 0 to 120 °F<br>Heating: -50 to 80 °F | |
| 3. | Control | | Internal or remotely mounted control panel | |
| 4. | Mounting | | Base mounted; additional fastening at upper rear | |
| 5. | Refrigerant | | Monochlorodifluoromethane (R-22) | |
| | Electrical class | | 1 | 2 |
| 6. | Top Assembly Drawing | | TA13228E4000 | TA13217E6898 |
| 7. | National stock number | | 4120-00-935-1531 | 4120-00-926-4138 |
| 8. | Line item number | | A25860 | A25859 |
| 9. | SSN | | M895 | M893 |
| 10. | Rated cooling capacity | | 60,000 Btuh | 60,000 Btuh |
| 11. | Rated heating capacity | | 47,000 Btuh | 47,000 Btuh |
| 12. | | Volts, AC | 208 | 208 |
| | | Phase | 3 | 3 |
| | | Frequency, Hz | 50/60 | 400 |
| | | Wires | 4 | 4 |
| 13. | Max power consumption | | 15.5 kW | 18.6 kW |
| 14. | Minumum power factor | | 0.78 | 0.63 |
| 15. | Starting current | Peak duration | | |
| 16. | Condition air flow at 0 inches wg | | 1900 scfm | 2020 scfm |
| 17. | Gross weight | | 620 lbs | 620 lbs |
| 18. | Power connector supplied | A/C | MS3100R32-17P | MS3100R32-17P |
| | | Mating | MS3106R32-17S | MS3106R32-17S |

Figure 12. Vertical compact unit, (60,000 Btuh).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

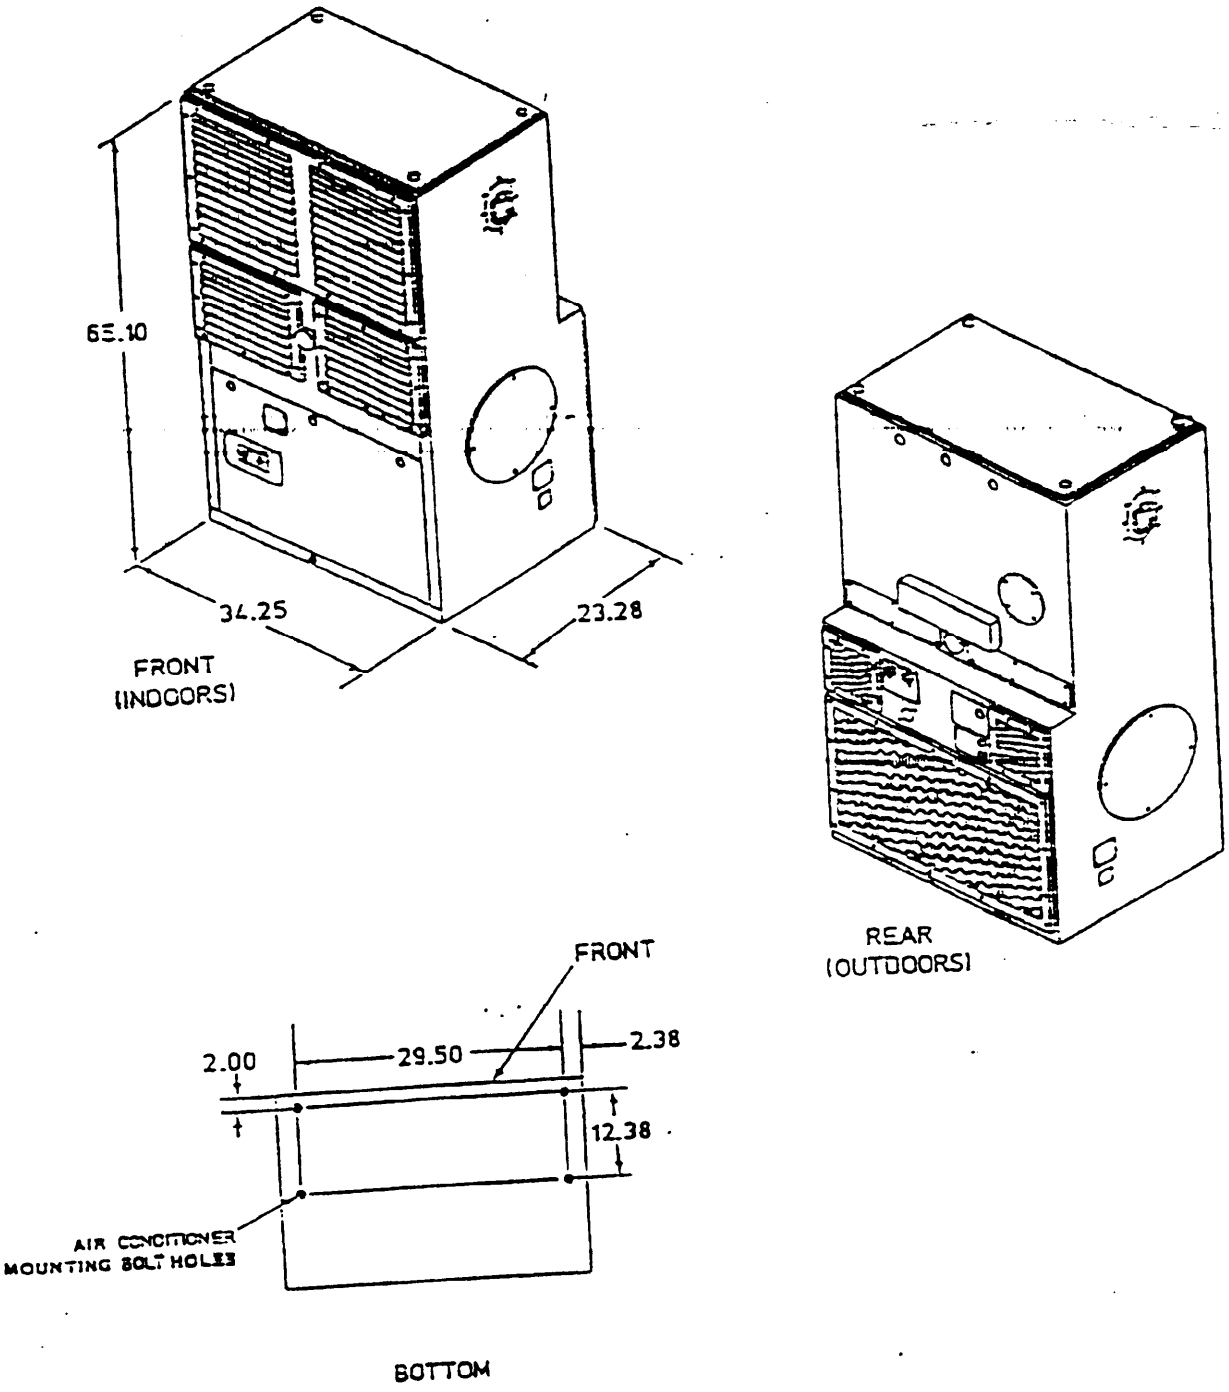



FIGURE 12. Vertical compact unit, (60,000 Btuh) 208 volts, 3ph, 50/60/400 Hz. (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

AIR CONDITIONER: SPLIT PACKAGE, SIZE: 18,000 BTUH

| | | | | |
|---|---|---|---|---|
| 1. | Military specification | | MIL-A-52963 | |
| 2. | Top Assembly Drawing | | TA13221E9100 | |
| 3. | Operating temperature range | | Cooling: 0 to 120 °F<br>Heating: -50 to 80 °F | |
| 4. | Control | | Remote control only. Remote control assembly, power and remote control cables provided unless specified otherwise. | |
| 5. | Mounting | | Evaporator and condenser sections are base mounted | |
| 6. | Refrigerant | | Monochlorodifluoromethane (R-22) | |
| 7. | National stock number | | 4120-01-069-1321 | |
| 8. | Line item number | | A34870 | |
| 9. | SSN | | M810 | |
| 10. | Rated cooling capacity | | 18,000 Btuh | |
| 11. | Rated heating capacity | | 30,000 Btuh | |
| 12. | | Volts, AC | 208 | |
| | | Phase | 3 | |
| | | Frequency, Hz | 400 | |
| | | Wires | 4 | |
| 13. | Max power consumption | | Cooling: 5.85 kW | Heating: 10.0 kW |
| 14. | Minumum power factor | | Cooling: 0.50 | Heating: 0.94 |
| 15. | Starting current | Peak duration | | |
| 16. | Condition air flow at 0.4 inches wg | | 525 to 575 scfm | |
| 17. | Gross weight (Max.) | | 370 lbs | |
| 18. | Power connector supplied | A/C | MS3102R22-22P | |
| | | Mating | Not supplied with unit | |

Figure 13. Split package unit, (18,000 Btuh).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

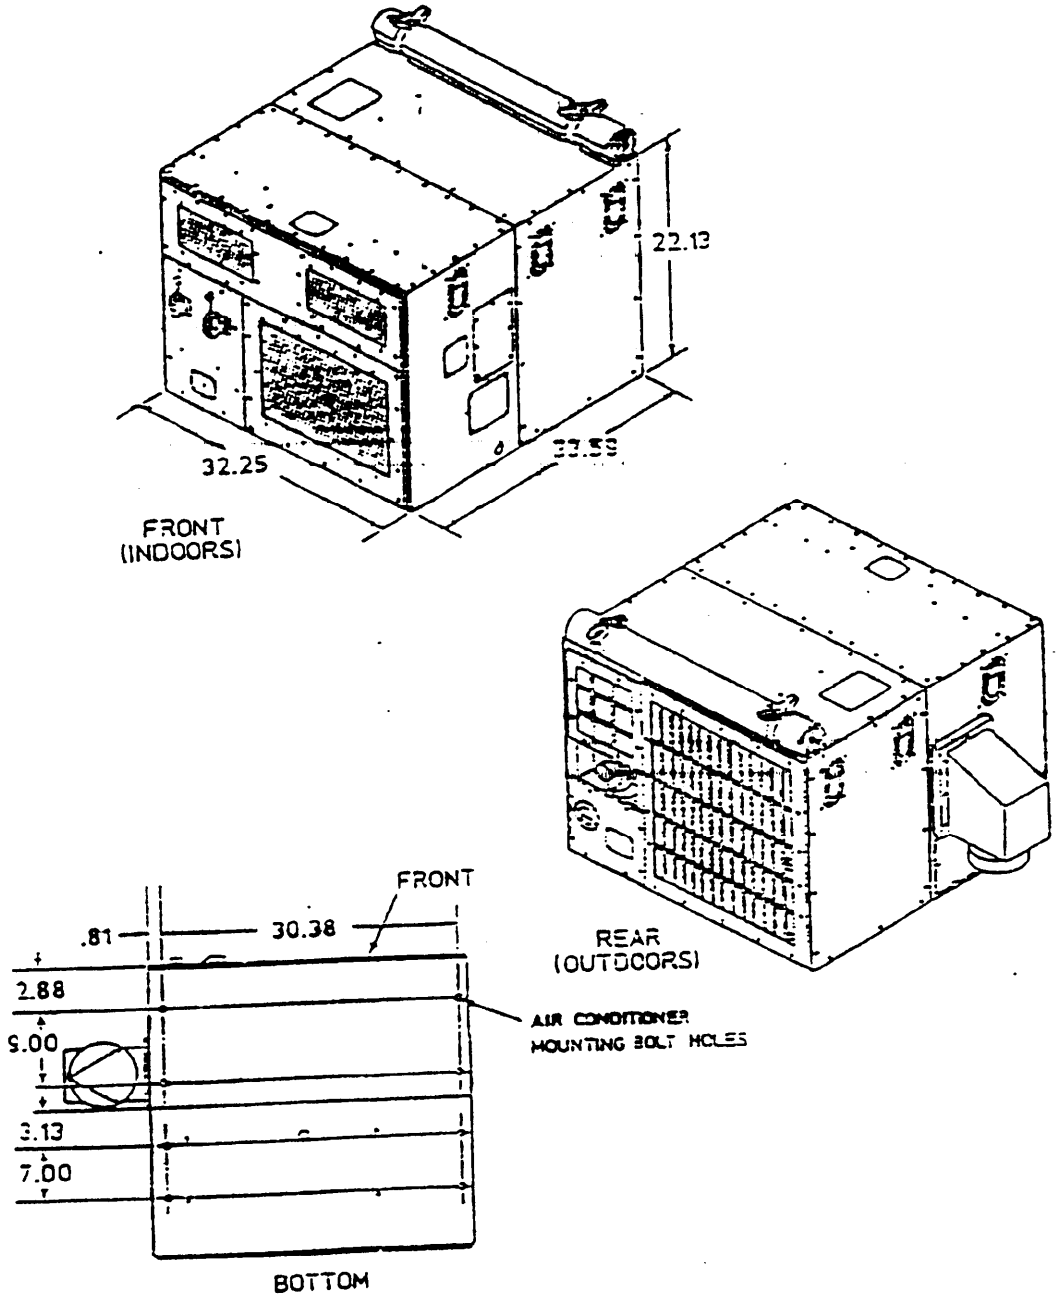



FIGURE 13. Split-package unit (18,000 Btuh). (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

AIR CONDITIONER: COMPACT, MPI, TYPE I (VERTICAL), SIZE C (18,000 BTUH)

| | | | | |
|---|---|---|---|---|
| 1. | Military specification | | MIL-A-53089 | |
| 2. | Top Assembly Drawing | | TA13228E4250 | |
| 3. | Operating temperature range | | Cooling: 55 to 120 °F<br>Heating: -50 to 80 °F | |
| 4. | Control | | Internal or remotely mounted control panel | |
| 5. | Mounting | | Base mounted; additional mounting at upper rear | |
| 6. | Refrigerant | | Monochlorodifluoromethane (R-22) | |
| 7. | National stock number | | To be assigned | |
| 8. | Line item number | | To be assigned | |
| 9. | SSN | | To be assigned | |
| 10. | Rated cooling capacity | | 18,500 Btuh | |
| 11. | Rated heating capacity | | 12,000 Btuh | |
| 12. | | Volts, AC | 208 | |
| | | Phase | 3 | |
| | | Frequency, Hz | 50/60 or 400 | |
| | | Wires | 5 | |
| 13. | Max power consumption | | Cooling: 6.5 kW | Heating: 6.5 kW |
| 14. | Minumum power factor | | Cooling: 0.90 | Heating: 1.00 |
| 15. | Starting current | Peak duration | | |
| 16. | Condition air flow at 0 inches wg | | 570 scfm | |
| 17. | Gross weight (Max.) | | 280 lbs | |
| 18. | Power connector supplied | A/C | MS3100R22-22P | |
| | | Mating | MS3106R22-22S | |

Figure 14. MPI, compact vertical (18,000 Btuh).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

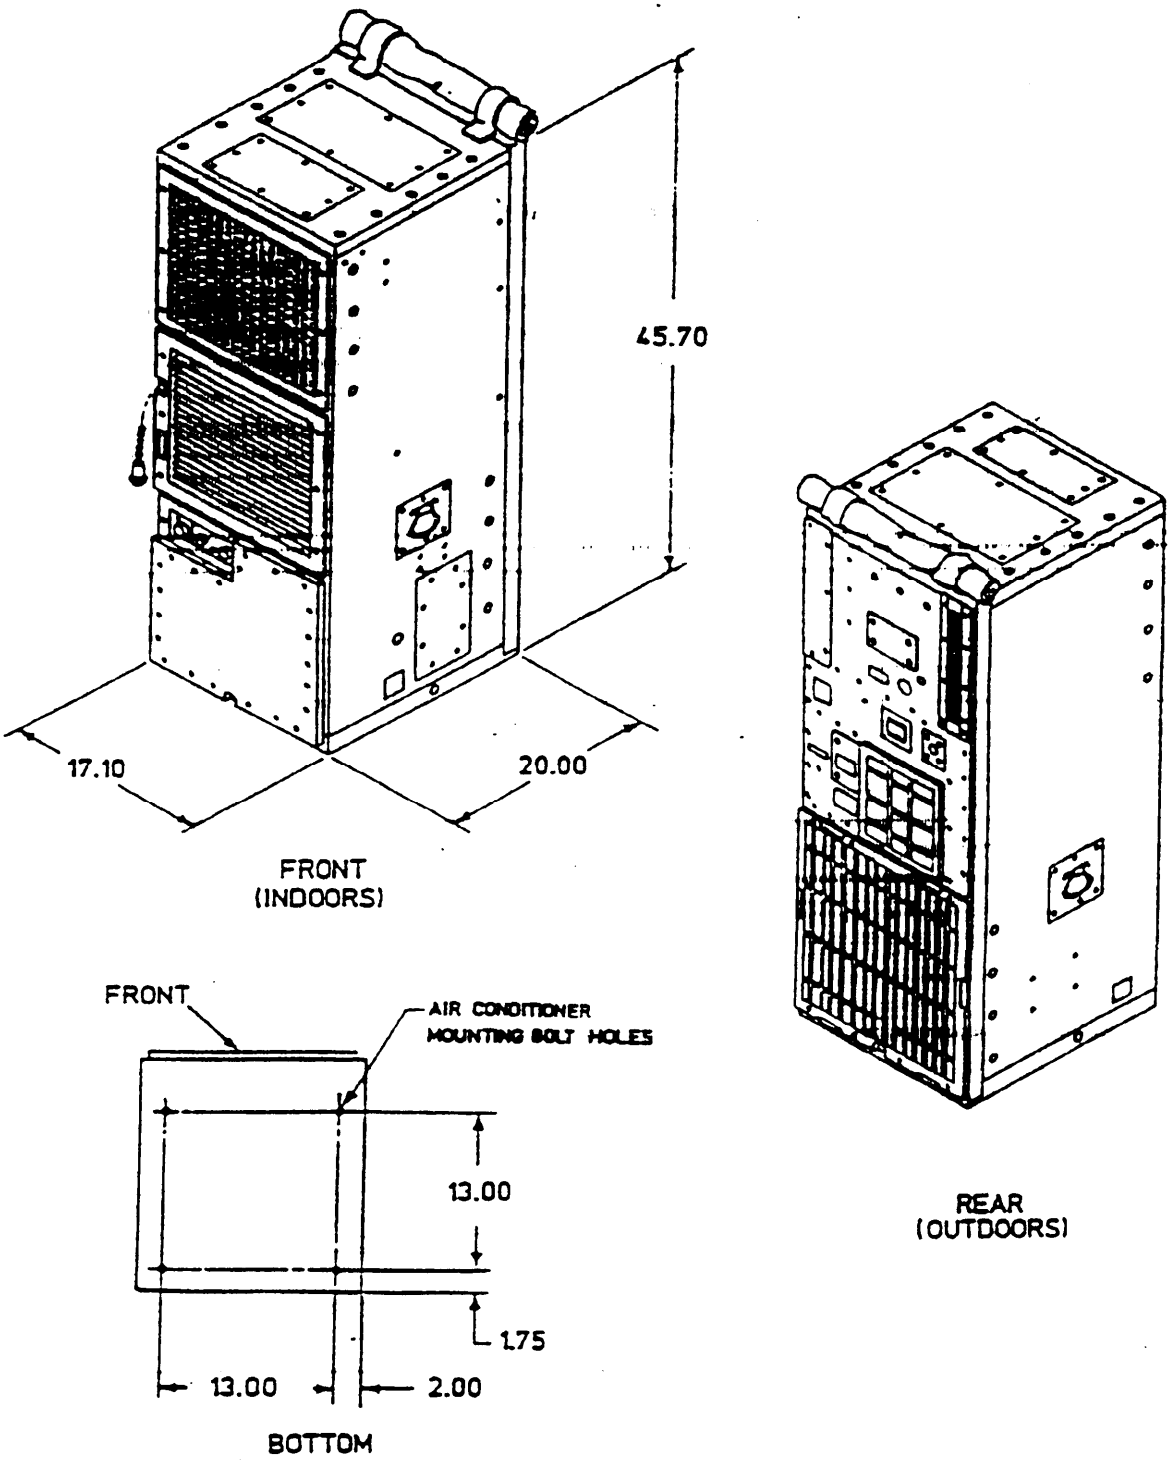



FIGURE 14. MPI, compact vertical (18,000 Btuh). (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

AIR CONDITIONER: COMPACT, MPI, TYPE I (VERTICAL), SIZE D (36,000 BTUH)

| | | | | |
|---|---|---|---|---|
| 1. | Military specification | | MIL-A-53089 | |
| 2. | Top Assembly Drawing | | TA13229E8100 | |
| 3. | Operating temperature range | | Cooling: 0 to 120 °F<br>Heating: -50 to 80 °F | |
| 4. | Control | | Internal or remotely mounted control panel | |
| 5. | Mounting | | Base mounted; additional mounting at upper rear | |
| 6. | Refrigerant | | Monochlorodifluoromethane (R-22) | |
| 7. | National stock number | | To be assigned | |
| 8. | Line item number | | To be assigned | |
| 9. | SSN | | To be assigned | |
| 10. | Rated cooling capacity | | 37,800 Btuh | |
| 11. | Rated heating capacity | | 28,600 Btuh | |
| 12. | | Volts, AC | 208 | |
| | | Phase | 3 | |
| | | Frequency, Hz | 50/60/400 | |
| | | Wires | 5 | |
| 13. | Max power consumption | | Cooling: 11.0 kW | Heating: 11.0 kW |
| 14. | Minumum power factor | | Cooling: 0.90 | Heating: 1.00 |
| 15. | Starting current | Peak duration | 105 Amps/5 sec. | |
| 16. | Condition air flow at 0 inches wg | | 1250 scfm | |
| 17. | Gross weight (Max.) | | 460 lbs | |
| 18. | Power connector supplied | A/C | Dwg 13229E6716-1 P/N SM3200R24-79P | |
| | | Mating | 13229E6718-2 | |

Figure 15. MPI, compact vertical (36,000 Btuh).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

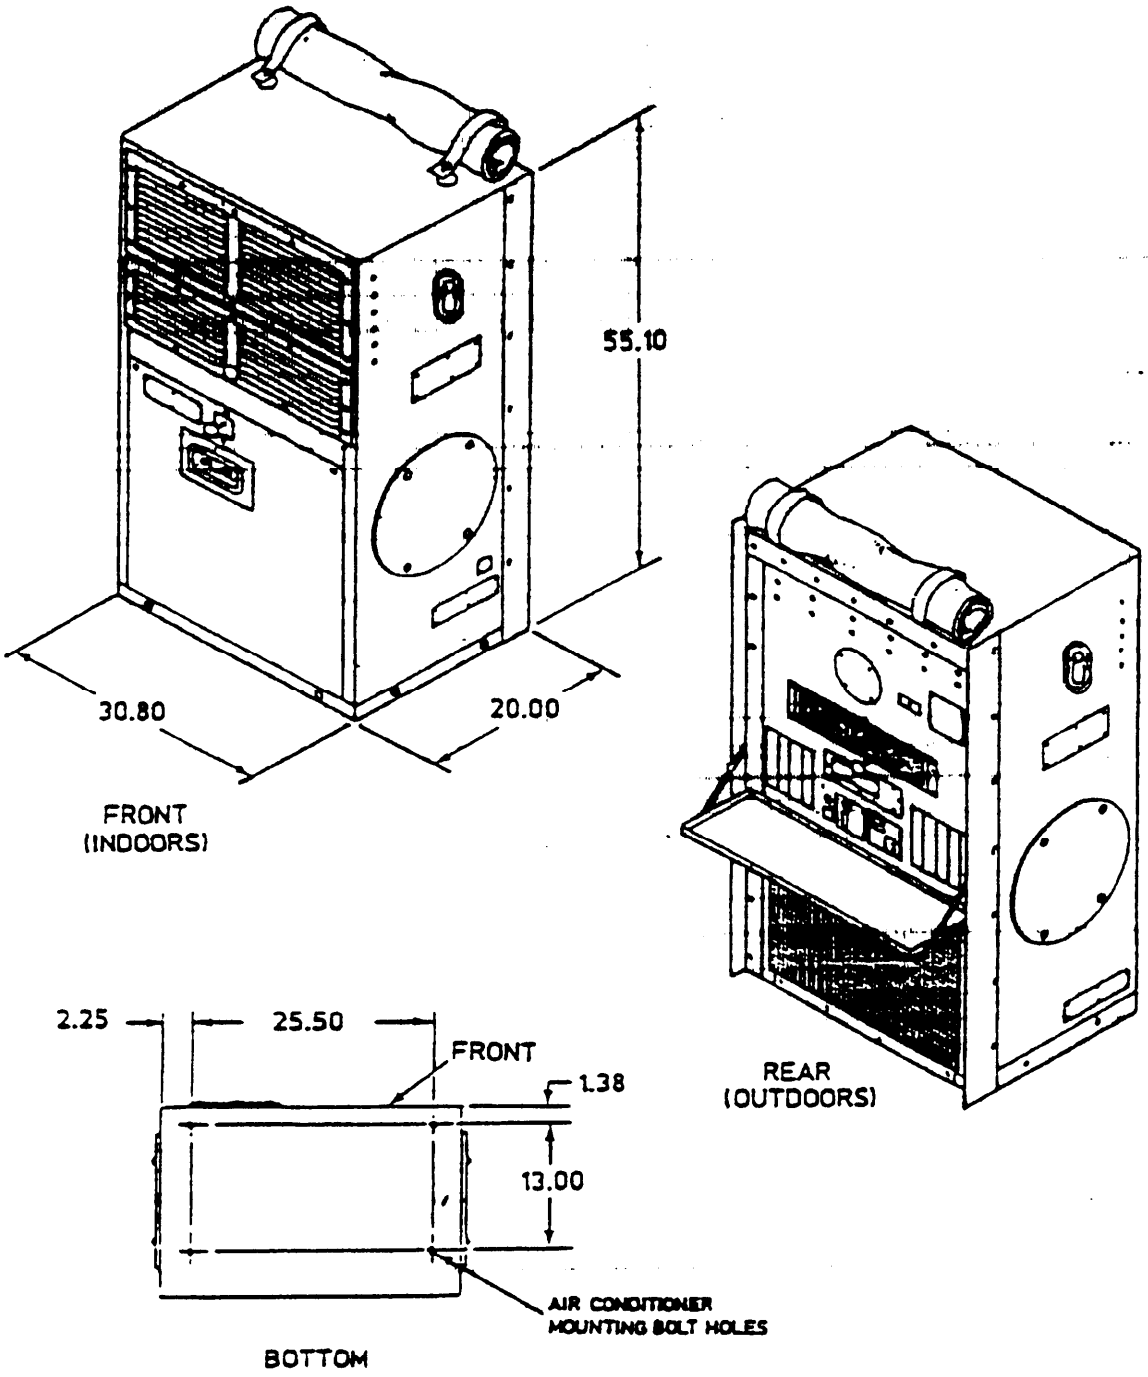



FIGURE 15. MPI, compact vertical (36,000 Btuh). (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

AIR CONDITIONER: COMPACT, MPI, TYPE II (HORIZONTAL), SIZE B (18,000 BTUH)

| | | | | |
|---|---|---|---|---|
| 1. | Military specification | | MIL-A-53089 | |
| 2. | Top Assembly Drawing | | TA13228E4200 | |
| 3. | Operating temperature range | | Cooling: 0 to 120 °F<br>Heating: -50 to 80 °F | |
| 4. | Control | | Internal or remotely mounted control panel | |
| 5. | Mounting | | Base mounted | |
| 6. | Refrigerant | | Monochlorodifluoromethane (R-22) | |
| 7. | National stock number | | To be assigned | |
| 8. | Line item number | | To be assigned | |
| 9. | SSN | | To be assigned | |
| 10. | Rated cooling capacity | | 18,500 Btuh | |
| 11. | Rated heating capacity | | 13,400 Btuh | |
| 12. | | Volts, AC | 208/230 | |
| | | Phase | 1/3 | |
| | | Frequency, Hz | 50/60/400 | |
| | | Wires | 5 | |
| 13. | Max power consumption | | Cooling: 6.5 kW | Heating: 6.5 kW |
| 14. | Minumum power factor | | Cooling: 0.90 | Heating: 1.00 |
| 15. | Starting current | Peak duration | | |
| 16. | Condition air flow at 0 inches wg | | 580 scfm | |
| 17. | Gross weight (Max.) | | 290 lbs | |
| 18. | Power connector supplied | A/C | MS3100R18-11P | |
| | | Mating | MS3106R22-22S | |

Figure 16. MPI, compact horizontal (18,000 Btuh).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

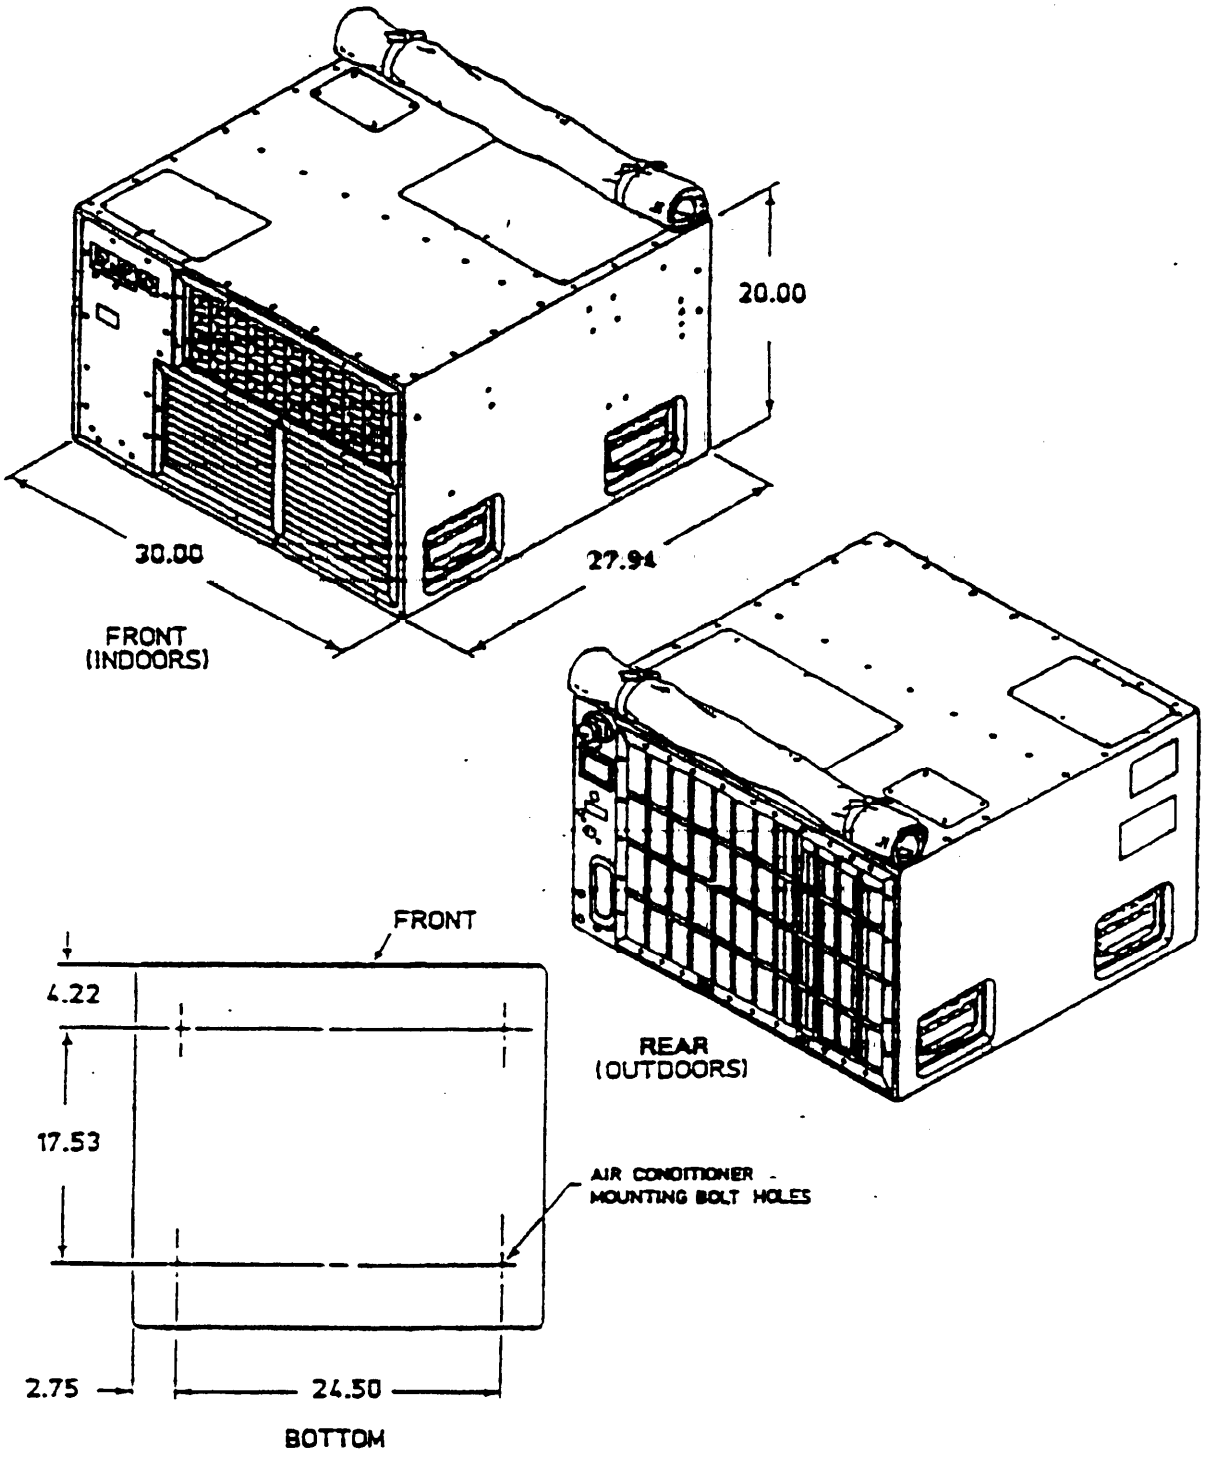



FIGURE 16. MPI, compact horizontal (18,000 Btuh). (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

AIR CONDITIONER: COMPACT, MPI, TYPE II (HORIZONTAL), SIZE C (36,000 BTUH)

| | | | | |
|---|---|---|---|---|
| 1. | Military specification | | MIL-A-53089 | |
| 2. | Top Assembly Drawing | | TA13228E6700 | |
| 3. | Operating temperature range | | Cooling: -25 to 120 °F<br>Heating: -50 to 80 °F | |
| 4. | Control | | Internal or remotely mounted control panel | |
| 5. | Mounting | | Base mounted; additonal mounting at upper rear | |
| 6. | Refrigerant | | Monochlorodifluoromethane (R-22) | |
| 7. | National stock number | | 4120-00-951-9697 | |
| 8. | Line item number | | To be assigned | |
| 9. | SSN | | To be assigned | |
| 10. | Rated cooling capacity | | 41,000 Btuh | |
| 11. | Rated heating capacity | | 31,200 Btuh | |
| 12. | | Volts, AC | 208 | |
| | | Phase | 3 | |
| | | Frequency, Hz | 50/60/400 | |
| | | Wires | 5 | |
| 13. | Max power consumption | | Cooling: 13.5 kW | Heating: 13.5 kW |
| 14. | Minumum power factor | | Cooling: 0.90 | Heating: 0.90 |
| 15. | Starting current | Peak duration | 105 Amps/5 sec. | |
| 16. | Condition air flow at 0 inches wg | | 1380 scfm | |
| 17. | Gross weight (Max.) | | 435 lbs | |
| 18. | Power connector supplied | A/C | Dwg 13229E6716-1 P/N SM3100R24-79P | |
| | | Mating | 13229E6718-2 | |

Figure 17. MPI, compact horizontal (36,000 Btuh).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

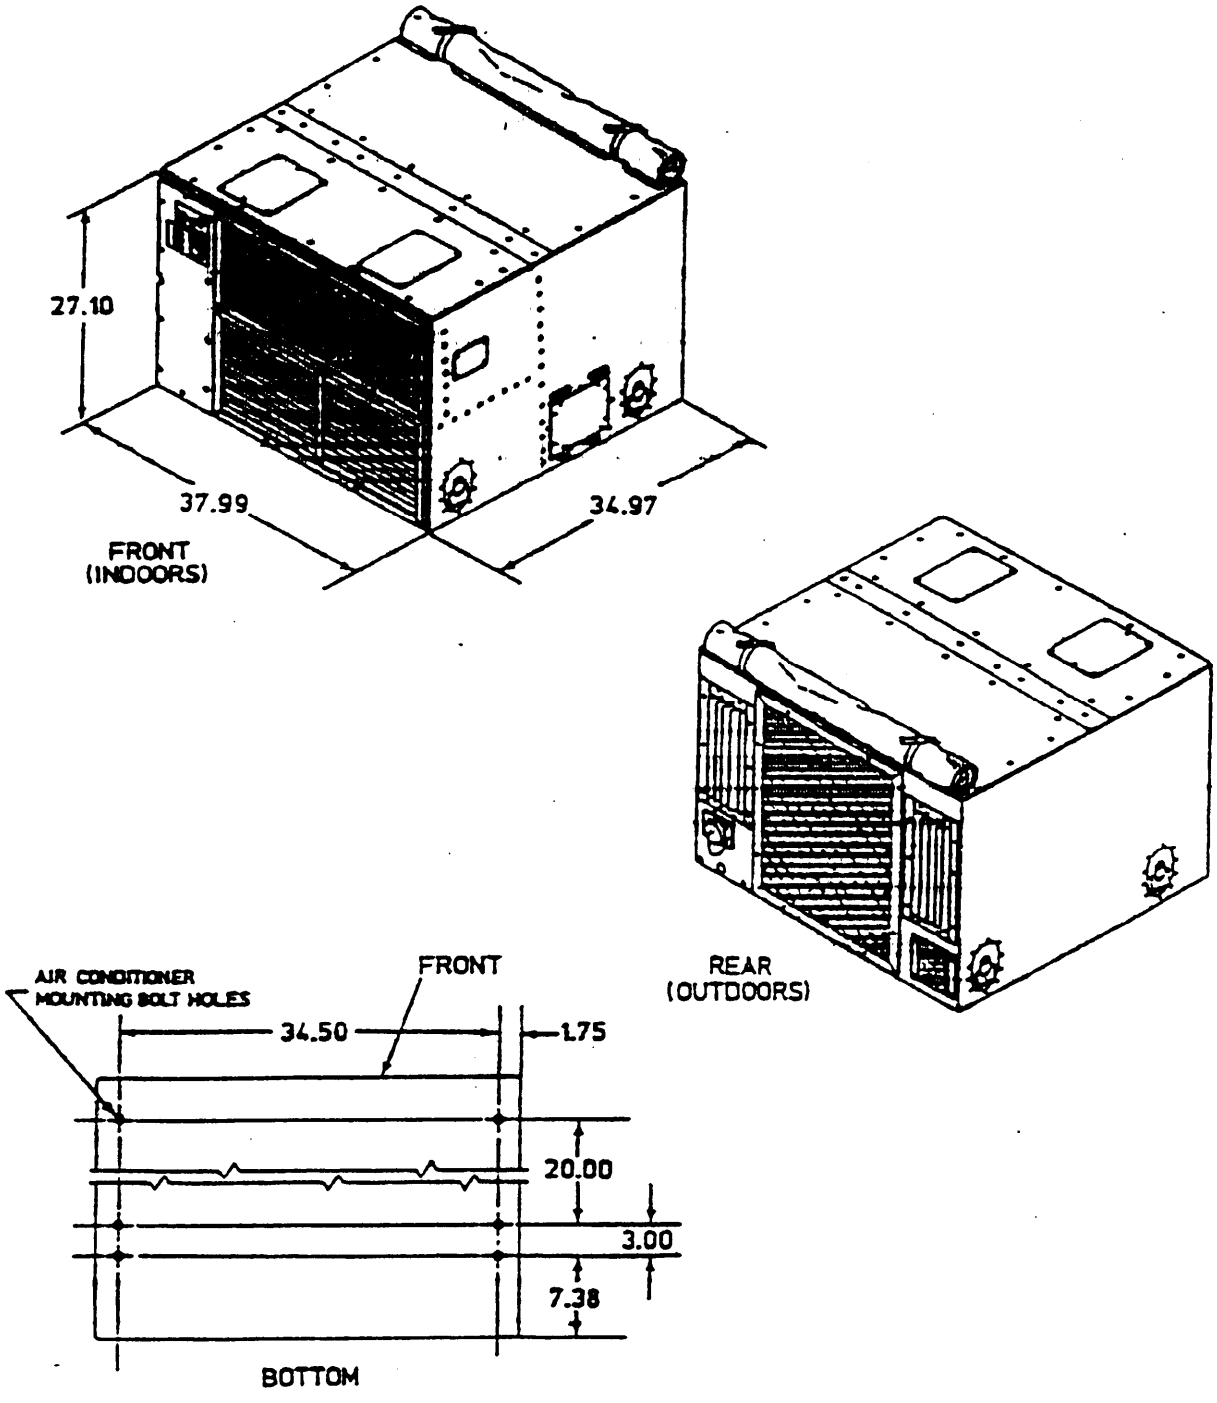



FIGURE 17. MPI, compact horizontal (36,000 Btuh). (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

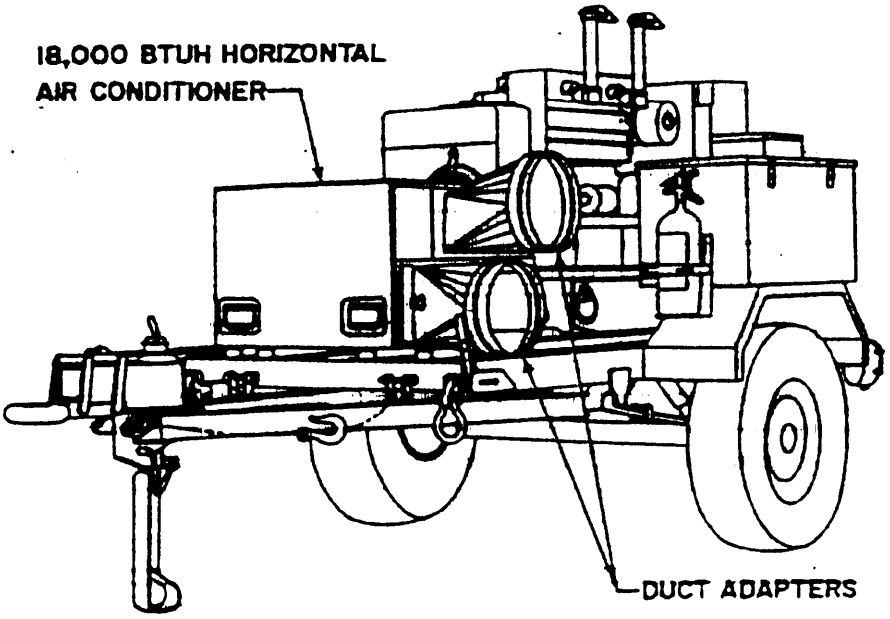
AIR CONDITIONER: TRAILER MOUNTED, TYPE II (HORIZONTAL), SIZE B (18,000 BTUH)

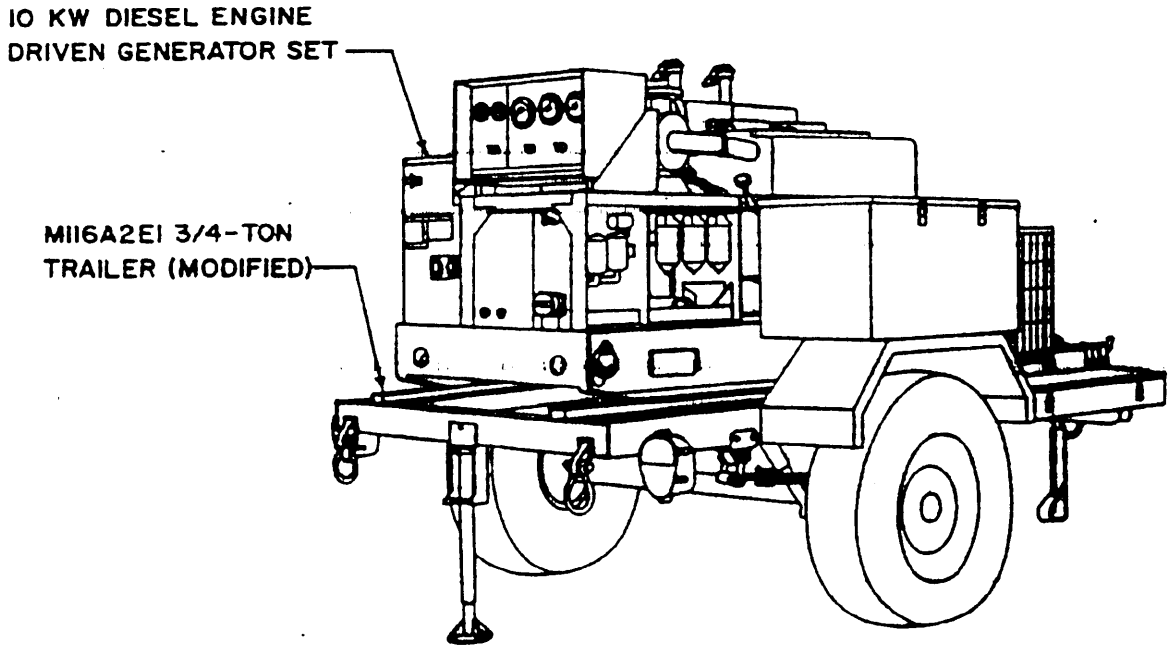
| | | | |
|---|---|---|---|
| 1. | Military specification | | MIL-A-52767 |
| 2. | Top Assembly Drawing | | TA13229E8611 |
| 3. | Operating temperature range | | Cooling: 0 to 125 °F<br>Heating: -50 to 80 °F |
| 4. | Control | | Internal or remotely mounted control panel |
| 5. | Mounting | | Mounted on 2-wheel, 3/4 ton trailer |
| 6. | Refrigerant | | Monochlorodifluoromethane (R-22) |
| 7. | National stock number | | 4120-00-930-5700 |
| 8. | Line item number | | A26271 |
| 9. | SSN | | M918 |
| 10. | Rated cooling capacity | | 18,000 Btuh |
| 11. | Rated heating capacity | | 13,400 Btuh |
| 12. | | Volts, AC | 208 |
| | | Phase | 3 |
| | | Frequency, Hz | 50/60 |
| | | Wires | 4 |
| 13. | Power source | | 10 kW Generator Set, 4 Wires |
| 14. | Starting current | Peak duration | |
| 15. | Gross weight (Max.) | | 2800 lbs |
| 16. | Condition air flow at 0.0 inches wg | | 590 scfm |
| 17. | Power connector | A/C | Permanent connection |

Figure 18. Trailer mounted, horizontal (18,000 Btuh).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.




OVERALL DIMENSIONS: LENGTH — 145.31 INCHES
WIDTH — 71.12 INCHES
HEIGHT — 67.75 INCHES WITHOUT REMOVABLE EXHAUST STACKS

FIGURE 18. Trailer mounted, horizontal (18,000 Btuh). (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

AIR CONDITIONER: DEPMED, DUCT TYPE, 54,000 BTUH (HORIZONTAL)

| | | | |
|---|---|---|---|
| 1. | Military specification | | MIL-A-83216 |
| 2. | Top Assembly Drawing | | N/A |
| 3. | Operating temperature range | | Cooling: 0 to 120 °F<br>Heating: -50 to 80 °F |
| 4. | Control | | Control panel mounted permanently on air conditioner |
| 5. | Mounting | | Base mounted |
| 6. | Refrigerant | | Monochlorodifluoromethane (R-22) |
| 7. | National stock number | | 4120-00-483-2880 |
| 8. | Line item number | | N/A |
| 9. | SSN | | N/A |
| 10. | Rated cooling capacity | | 54,000 Btuh |
| 11. | Rated heating capacity | | 32,000 Btuh |
| 12. | | Volts, AC | 120/208 |
| | | Phase | 3 |
| | | Frequency, Hz | 50/60 |
| | | Wires | 4 |
| 13. | Max power consumption | | 10 kW |
| 14. | Minumum power factor | | N/A |
| 15. | Starting current | Peak duration | 103 amps/phase |
| 16. | Condition air flow at 0.25 inches wg | | 2200 scfm |
| 17. | Gross weight (Max.) | | 920 lbs |
| 18. | Power connector supplied | A/C | MS90558C32412P |
| | | Mating | MS90558C32412S |

Figure 19. DEPMED, 54,000 Btuh.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

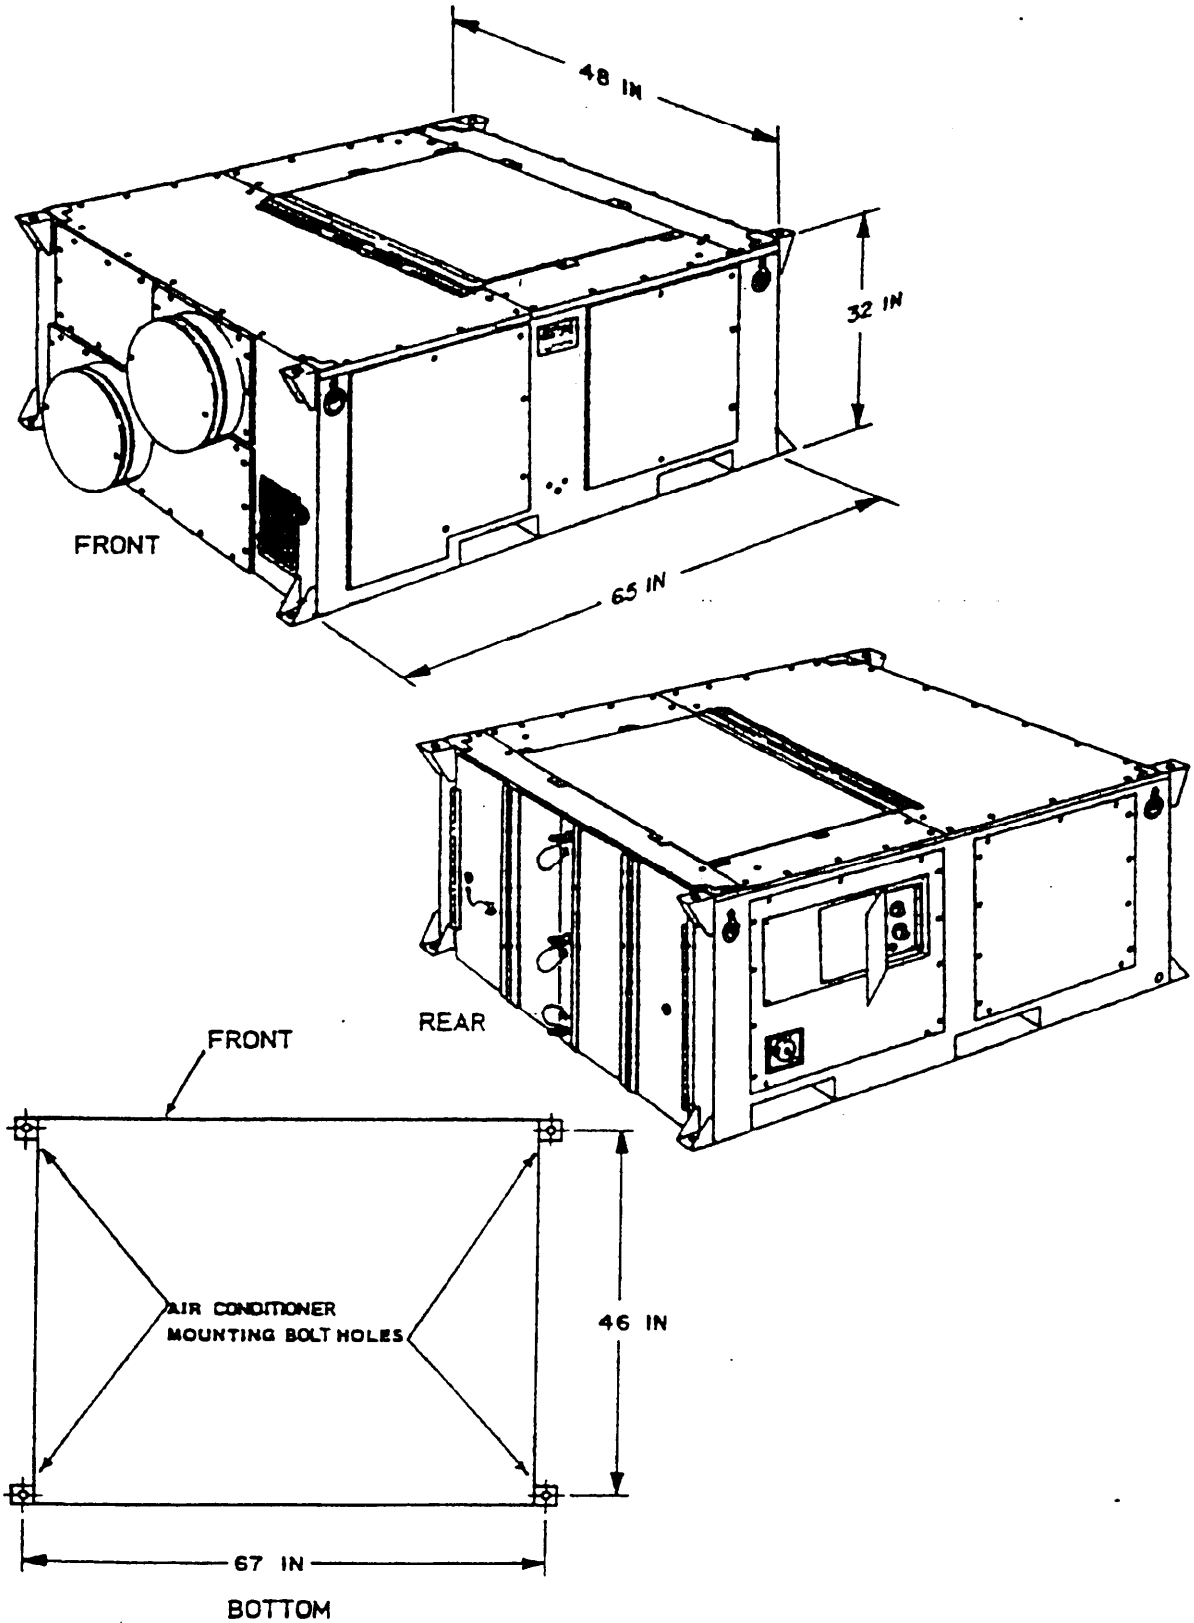



FIGURE 19. DEPMED, 54,000 Btuh. (continued)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. This standard is intended for use in selecting air conditioning units to meet a defined need.

6.2 Subject term (key word) listing.

Compact, horizontal
Compact, vertical
Compact unit
Multipower
Split-package
Trailer mounted
6,000 Btuh
9,000 Btuh
18,000 Btuh
36,000 Btuh
60,000 Btuh

6.3 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - ME

Review activities:
Army - EA, GL
Navy - MC
DLA - GS

User activity:
Army - ER

Preparing activity:
Army - ME

Project 4120-1012



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

| RECOMMEND A CHANGE: | 1. DOCUMENT NUMBER<br>MIL-STD-14068 | 2. DOCUMENT DATE (YYMMDD)<br>920305 |
|---|---|---|

3. DOCUMENT TITLE
Air Conditioners, Standard Family of Military Air Conditioners, General Application Characteristics

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

REASON FOR RECOMMENDATION

6. SUBMITTER

| a. NAME (Last, First, Middle Initial) | b. ORGANIZATION | |
|---|---|---|
| c. ADDRESS (Include Zip Code) | d. TELEPHONE (Include Area Code)<br>(1) Commercial<br>(if applicable)<br>(2) AUTOVON | 7. DATE SUBMITTED |

8. PREPARING ACTIVITY

| a. NAME<br>Betty Taylor | b. TELEPHONE (Include Area Code)<br>(1) Commercial<br>(703) 704-3466 | (2) AUTOVON<br>654-3466 |
|---|---|---|
| c. ADDRESS (Include Zip Code)<br>Army Belvoir RDE Center<br>ATN: STRBE-TSE<br>Fort Belvoir, VA 22060-5606 | IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:<br>Defense Quality and Standardization Office<br>5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466<br>Telephone (703) 756-2340 AUTOVON 289-2340 | |

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:47Z
Check the source to verify that this is the current version before use.