INCH-POUND

MIL-PRF-1/1222C
2 July 1999
SUPERSEDING
MIL-E-1/1222B
22 April 1970

PERFORMANCE SPECIFICATION SHEET

ELECTRON TUBE, CATHODE RAY
TYPE 12DP7C

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the electron tube described herein shall consist of this document and the latest issue of MIL-PRF-1.

DESCRIPTION: Magnetic deflection and focus, round 12-inch, aluminized, gray spherical faceplate.

DIMENSIONS AND PIN CONNECTIONS. See figure 1.

ABSOLUTE RATINGS:

Parameter:	Ef	Ec1	Ec2	Eb	Ehk	Rg1	Alt
Unit:	V	V dc	V dc	V dc	V dc	Meg	ft
Maximum:	6.9	-200	770	13,200	+180	1/	60,000
Minimum:	5.7	0	---	4,000	-180	---	---
Test conditions:	6.3	2/ Adjust	250	4,000	---	---	---

See footnotes at end of table I.

GENERAL:

Qualification: Required.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:17Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection.

Inspection	Method	Conditions	Acceptance level	Inspection code or level	Symbol	Limits		Unit
						Min	Max	
Qualification								
Pressure (implosion)	1141		---	---	---	---	---	---
Vibration	5111		---	---	Width	---	2.0	mm
Conformation inspection, part 1								
Voltage breakdown	5201		0.65	II	---	---	---	---
Voltage breakdown (magnetic types)	5201		0.65	II	---	---	---	---
Gas ratio	5206	3/	0.65	II	Gr	---	0.25	---
Neck straightness alignment	5101		0.65	II	---	---	---	---
Screen and faceplate blemishes	5106		0.65	II	---	---	---	---
Modulation	5223	Ib = 200 µA	0.65	II	ΔEc1	---	38	V dc
Spot position (magnetic deflection)	5231		0.65	II	---	---	20	mm
Zero-bias anode current (magnetic deflection)	5236		0.65	II	---	---	---	---
Grid-cutoff voltage	5241		0.65	II	Ec1	-25	-70	V dc
Grid No. 1 leakage current	5251		0.65	II	---	---	---	---
Aperture alignment	---	5/	0.65	II	---	---	8	mm
Conformance inspection, part 2								
Secureness of base, cap or insert	1101		---	---	---	---	---	---
Heater current	1301		---	---	If	540	660	mA
Electrode current	5201	Ec1 = 0	---	---	Ic2	---	50	µA dc
Side terminal and base Alignment	5101	Pin No. 5	---	---	---	---	---	---
Neck and bulb alignment (magnetic types)	5101		---	---	---	---	---	---
Face tilt	5101		---	---	---	---	---	---
Stray light emission (conventional types)	5216	Eb2 = 13,200 V dc; Ec2 = 770 V dc	---	---	---	---	---	---
Screen	5221		---	---	---	---	---	---
Screen brightness I	5221	4/	---	---	---	---	---	---

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:17Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

Inspection	Method	Conditions	Acceptance level	Inspection code or level	Symbol	Limits		Unit
						Min	Max	
Conformance inspection, part 2 - Continued								
Line width A (magnetic deflection)	5226	Ib = 200 µA dc	---	---	Width	---	0.50	mm
Line width C (magnetic deflection)	5226	Ib = 200 µA dc	---	---	Width	---	0.75	mm
Focusing ampere turns	5246	Ib = 200 µA dc; D = 4.125 inch	---	---	---	337	459	---
Heater-cathode leakage current	5251		---	---	---	---	---	---
Grid No. 2 leakage current	5251		---	---	---	---	---	---
Base pin solder depth	1111		---	---	---	---	---	---
Conformance inspection, part 3								
Life-test provisions	---	Group C; t = 500 hours (min); Eb2 = 13.200 V dc; Ec2 = 770 V dc; Ib = 60 µA dc	---	---	---	---	---	---
Life-test end points	---	Line width A: Ib = 200 µA dc	---	---	Width	---	0.50	mm
		Line width C: Ib = 200 µA dc	---	---	Width	---	0.75	mm
		Modulation: Ib = 200 µA dc	---	---	ΔEc1	---	38	V dc
Periodic-check tests								
Direct-interelectrode capacitance	1331	k to all	---	---	Ck	---	10	pF
		g1 to all	---	---	Cg1	---	11	pF
		g2 to all	---	---	Cg2	---	12	pF
Cathode illumination	5216		---	---	---	---	---	---

1/ When Ec2 is greater than 330 V dc. Rg1 shall not exceed 0.5 Meg. When Ec2 is less than 330 V dc. Rg1 shall not exceed 1.5 Meg.

2/ When Ec2 is greater than 330 V dc or Ec1 is near zero, the effective resistance of the anode and grid No. 3 supply should be adequate to limit the anode and grid No. 3 input power to 6 watts. The peak grid No. 1 drive from cutoff should never exceed 65 volts.

3/ This test to be performed at the conclusion of the holding period.

4/ Screen brightness I shall be measured as specified in method 5221 except that no pulsing shall be used on the grid and the screen current shall be 26.7 µA with an anode voltage of 9 kV. The steady-state output shall be 735 cb minimum.

5/ The distance between the center of the unfocused, undeflected spot at low intensity (Ec1 near cut-off) and the center of the image of the masking aperture observed at high intensity of the unfocused, undeflected spot shall not exceed the limit specified. Ec1 should not be held at zero for more than approximately 30 seconds to prevent damage to the screen.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:17Z
Check the source to verify that this is the current version before use.

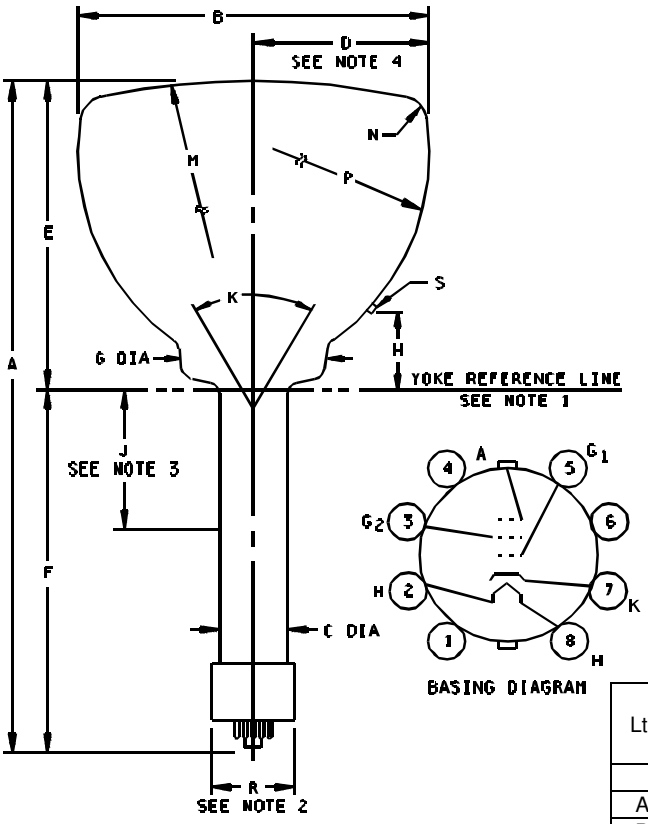

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
Conformance inspection, part 2				
A	19.250	20.000	488.90	508.00
B	11.813	12.187	300.05	309.55
C	1.313 DIA	1.437 DIA	33.35 DIA	36.50 DIA
D	5.000	---	127.00	---
E	10.313	10.687	261.95	271.45
F	8.937	9.312	227.00	236.52
G	3.063 DIA	3.187 DIA	77.80 DIA	80.98 DIA
H	1.625	2.125	41.25	53.98
Conformance inspection, part 3 (periodic check)				
R	BASE: B8-65 (EIA)			
S	Bulb contact: C1-5			
Reference dimensions (see note 5)				
J	4.125		104.78	
K	50°			
M	20.000 R		508.00 R	
N	1.000 R		25.40 R	
P	7.687 R		195.25 R	

NOTES:
1. Reference line is determined by the plane of the upper edge of the reference line gauge (JEDEC No. 112) when the gauge is resting on the cone.
2. Anode terminal aligns with pin No. 5 ± 10 degrees.
3. Recommended position for center of focusing field.
4. Useful screen radius.
5. Reference dimensions are for information only and are not required for inspection purposes.

FIGURE 1. Outline drawing of electron tube type 12DP7C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:17Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR
Navy - AS, CG, MC, OS, SH
Air Force - 17, 19, 99

Preparing activity:
DLA - CC

(Project 5960-3534)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:17Z
Check the source to verify that this is the current version before use.