This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:

USER SYMBOLS:

PROJECT NO. 5310-0776

FED. SUP CLASS
5310

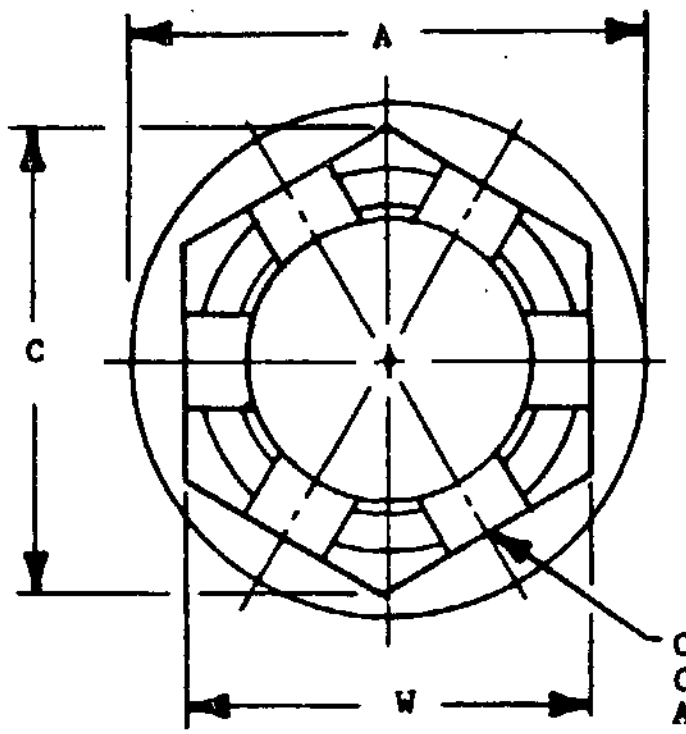

OPPOSITE SLOTS MUST COINCIDE WITHIN .005 AND SLOT AXIS MUST BE WITHIN .005 OF THREAD P.D. AXIS.

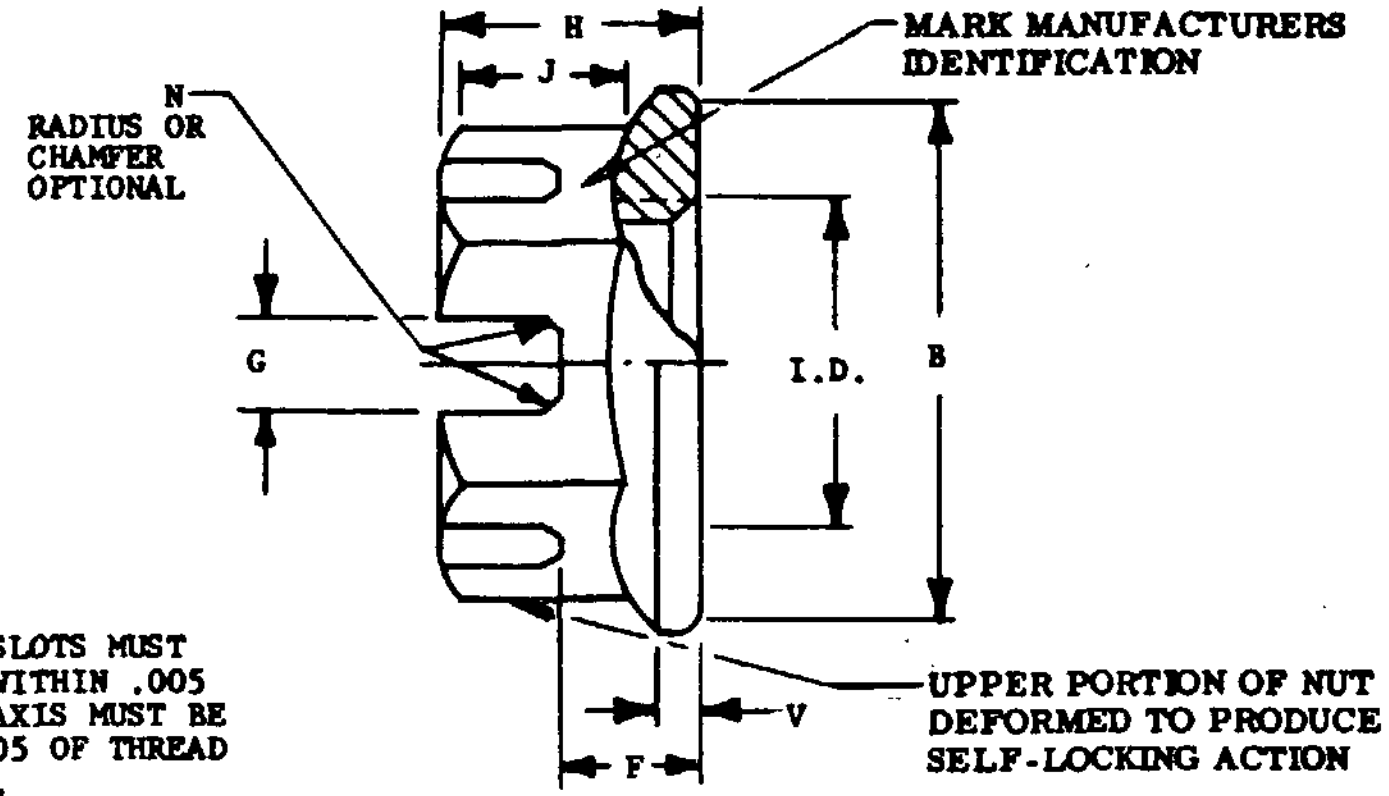

N—RADIUS OR CHAMFER OPTIONAL

MARK MANUFACTURERS IDENTIFICATION

UPPER PORTION OF NUT DEFORMED TO PRODUCE SELF-LOCKING ACTION

DASH NUMBER		THREAD MIL-S-8879	A	B	C	I.D.	F	G		H		J	N	V	W		ULTIMATE TENSILE STRENGTH LB MIN	WEIGHT LB/100 MAX	COTTER PIN SIZE (REF)
NON DRY LUB	DRY LUB		MAX	MIN	MIN	MAX	±.016	MAX	MIN	MAX	MIN	MIN	MAX	REF	MAX	MIN			
3	L3	.1900-32UNJF-3B	.325	.291	.277	.220	.094	.065	.050	.203	.173	.090	.035	.020	.252	.243	1,230	.16	3/64
4	L4	.2500-28UNJF-3B	.420	.386	.348	.280	.094	.100	.070	.203	.173	.100	.035	.020	.315	.305	2,290	.25	1/16
5	L5	.3125-24UNJF-3B	.520	.482	.419	.342	.094	.100	.070	.203	.173	.100	.035	.020	.378	.367	3,700	.36	1/16
6	L6	.3750-24UNJF-3B	.579	.539	.480	.405	.109	.155	.125	.234	.204	.110	.053	.025	.440	.429	5,720	.49	3/32
7	L7	.4375-20UNJF-3B	.645	.600	.552	.467	.109	.155	.125	.234	.204	.110	.053	.025	.504	.492	7,720	.60	3/32
8	L8	.5000-20UNJF-3B	.770	.725	.623	.530	.141	.155	.125	.265	.235	.120	.053	.030	.566	.554	10,550	.95	3/32
9	L9	.5625-18UNJF-3B	.850	.815	.765	.592	.188	.186	.156	.328	.298	.175	.062	.045	.692	.678	13,400	1.70	1/8
10	L10	.6250-18UNJF-3B	.910	.875	.836	.655	.188	.186	.156	.328	.298	.175	.062	.055	.755	.741	17,060	1.90	1/8
12	L12	.7500-16UNJF-3B	1.130	1.095	.978	.785	.250	.186	.156	.390	.360	.200	.062	.055	.880	.865	25,010	2.80	1/8
14	L14	.8750-14UNJF-3B	1.345	1.300	1.121	.910	.313	.186	.156	.452	.422	.250	.062	.070	1.006	.990	34,220	5.30	1/8
16	L16	1.0000-12UNJF-3B	1.545	1.500	1.263	1.035	.375	.186	.156	.515	.485	.300	.062	.070	1.132	1.115	45,000	7.40	1/8
18	L18	1.1250-12UNJF-3B	1.745	1.700	1.41[illegible]	1.160	.406	.186	.156	.578	.548	.350	.062	.090	1.257	1.239	58,350	11.00	1/8
20	L20	1.2500-12UNJF-3B	1.915	1.875	1.556	1.285	.469	.186	.156	.640	.610	.375	.062	.090	1.383	1.364	73,970	14.00	1/8

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 7 DEC 73

REVISED

P.A. NAVY - AS Other Cust ARMY - AV	TITLE NUT, SELF-LOCKING, LIGHTWEIGHT, THIN, CASTELLATED, 450°F	MILITARY STANDARD MS14145
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES:	SHEET 1 OF 2

PLATE NO. 23065

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:35Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5310

NOTES:

1. MATERIAL: STEEL - SEE PROCUREMENT SPECIFICATION.
2. PLATING: STEEL NUTS (WITHOUT DRY FILM LUBRICANT) CADMIUM PLATED IN ACCORDANCE WITH QQ-P-416, TYPE II CLASS 2 DRY FILM LUBRICATED STEEL NUTS IN ACCORDANCE WITH QQ-P-416, TYPE AND CLASS OPTIONAL IF NUTS MEET THE SALT SPRAY REQUIREMENTS OF QQ-P-416, TYPE II.
3. SURFACE TEXTURE: IN ACCORDANCE WITH ANSI B46.1 SHALL NOT EXCEED 125 MICROINCHES.
4. DIMENSIONS IN INCHES.
5. LUBRICANT: LUBRICANT APPROVED IN ACCORDANCE WITH MIL-N-25027. LUBRICANTS, EXCEPT DRY FILM LUBRICANTS, SHALL BE SOLUBLE IN THE CLEANER SPECIFIED IN THE PROCUREMENT SPECIFICATION. FOR USAF APPLICATIONS NUTS TREATED WITH DRY FILM LUBRICANTS SHALL NOT BE UTILIZED IN INTEGRAL FUEL TANKS.
6. THREADS: IN ACCORDANCE WITH MIL-S-8879 BEFORE LUBRICATION.
7. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.
8. PERFORMANCE: MIL-N-25027 EXCEPT LOCKING TORQUE VALUES APPLICABLE FOR 5 CYCLES.
9. DESIGN INFORMATION: THESE NUTS MAY BE USED AT TEMPERATURES 450°F AND BELOW IN THOSE TYPES OF APPLICATIONS FOR WHICH SLOTTED OR CASTELLATED NUTS ARE APPROVED FOR USE; AND IF SUCH APPLICATIONS CONFLICT WITH ANY LIMITATIONS ON THE USE OF SELF-LOCKING NUTS, AS CITED BY MS33588, THIS STANDARD TAKES PRECEDENCE. NUTS ARE TO BE INSTALLED IN ACCORDANCE WITH MS33540.

EXAMPLE OF PART NUMBER: MS14145 L4-.2500-28 NUT, CADMIUM PLATED, DRY FILM LUBRICATED.
MS14145-4-.2500-28 NUT, CADMIUM PLATED, SOLUBLE LUBRICANT.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 7 DEC 73 REVISED

P.A. NAVY - AS Other Cust ARMY - AV	TITLE NUT, SELF-LOCKING, LIGHTWEIGHT, THIN, CASTELLATED, 450°F.	MILITARY STANDARD MS14145
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES:	SHEET 2 OF 2

PLATE NO. 23035

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1974 -713-150/2947

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:35Z
Check the source to verify that this is the current version before use.