THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.
THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-N-25027

Form Approved
OMB No. 0704-0188

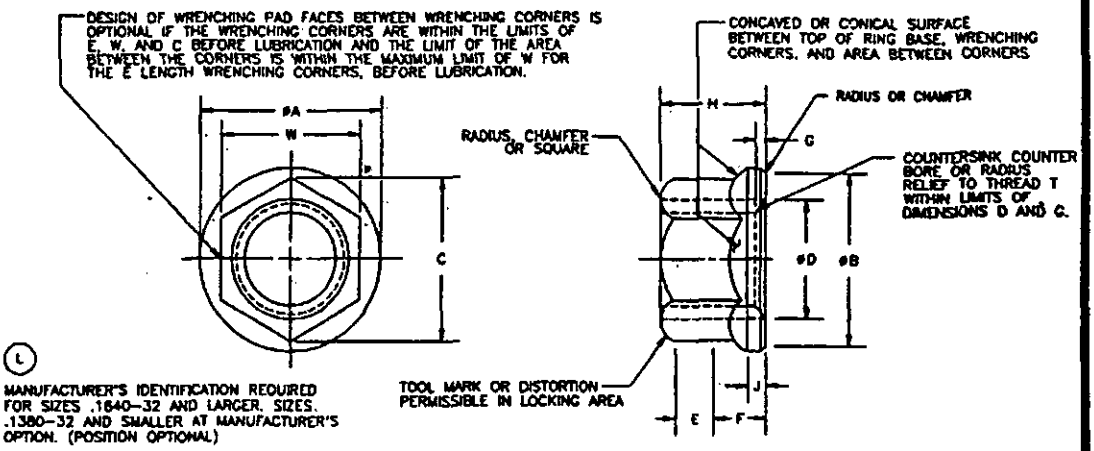


TABLE I

SIZE DASH NO.	(a) THREAD T	ØA MAX.	ØB MIN.	C MIN.	ØD MAX	ØD MIN	(d) E MIN.	(e) F MIN.	G MAX	G MIN
-02	.086-56UNJC-3B	.167	.137	.138	.106	.086	.045	.019	.021	.004
-04	.1120-40UNJC-3B	.206	.176	.171	.142	.112	.050	.028	.027	.005
-06	.1380-32UNJC-3B	.244	.214	.207	.168	.138	.055	.039	.031	.006
-08	.1640-32UNJC-3B	.290	.260	.244	.194	.164	.060	.041		
- 3	.1900-32UNJF-3B	.330	.290	.277	.220	.190	.065	.043		
- 4	.2500-28UNJF-3B	.420	.388	.347	.386	.250	.090	.057	.036	.007
- 5	.3125-24UNJF-3B	.520	.482	.419	.482	.312	.120	.077	.042	.008
- 6	.3750-24UNJF-3B	.620	.575	.491	.575	.375	.125	.089		

SIZE DASH NO.	ØD MAX	ØD MIN	J MIN.	(c) W ACROSS FLATS MAX	W ACROSS FLATS MIN	(b) X	(g) AXIAL STRENGTH LB MIN	WEIGHT LB/100 MAX	(f) WRENCHING TORQUE TEST VALUES IN. LB. MIN.
-02	.100	.080	.010	.127	.122	.0025	660	.020	5
-04	.125	.103		.158	.150	.003	1,110	.050	10
-06	.141	.115		.190	.181		1,670	.080	20
-08	.188	.125	.015	.221	.213		2,490	.150	30
- 3		.154		.252	.243		3,470	.180	60
- 4	.219	.204	.019	.316	.304	.004	6,200	.350	150
- 5	.266	.251	.023	.378	.367		9,820	.600	330
- 6	.282	.267	.030	.440	.430		15,200	.800	530

(a) THREADS BEFORE LUBRICATION PER MIL-S-8879.
(b) BEARING SURFACE SHALL BE SQUARE WITH PITCH DIA WITHIN X WHEN MEASURED IN ACCORDANCE WITH MIL-N-25027.
(c) DIMENSION ACROSS FLATS INCLUDES DEFORMATION OF SELF LOCKING DEVICE.
(d) MINIMUM LENGTH OF EACH WRENCHING CORNER.
(e) MINIMUM DISTANCE FROM THE WASHER FACE OF THE NUT TO THE BEGINNING OF THE MINIMUM LENGTH E OF EACH WRENCHING CORNER.
(f) NUT SHALL BE TESTED FOR WRENCHING TORQUE BY THE USE OF A BOX OR SOCKET WRENCH.
(g) TEST BOLTS SHALL BE 180,000 PSI MIN.

L DENOTES CHANGES

INCH-POUND

PREPARING ACTIVITY: DLA-IS
CUSTODIANS: ARMY-AV NAVY-AS
AIR FORCE-99 DLA-
REVIEW: AR, AS, MI
USER: ER
PROJECT NUMBER: 5310-1941

MILITARY SPECIFICATION SHEET

TITLE
NUT, SELF-LOCKING, 450°F, REDUCED HEXAGON, REDUCED HEIGHT, RING BASE, NON-CORROSION RESISTANT STEEL

SPECIFICATION SHEET NUMBER
MS21042 L 18 OCT 93

SUPERSEDING
MS21042 K 30 NOV 88 (SEE NOTE 4.)

AMSC- N/A FSC 5310

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-N-25027

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved
OMB No. 0704-0188

TABLE II

INTERCHANGEABILITY TABLE

CANCELLED AND INACTIVATED PART NUMBERS													SUBSTITUTIVE PART NUMBERS
AN363	AN364	AN365	MS20364	MS20365	MS21040	NAS679	NAS1021		NAS1022		NAS1291		
---	---	---	---	---	---	---	---	---	---	---	---	X02	MS21042 02
---	---	---	---	---	---	---	---	---	---	---	---	-02	MS21042 L02
---	---	-440C	---	-440C	-04	X04W,X04	AX04	---	---	---	---	X04	MS21042 -04
---	---	---	---	---	L04	A04	---	A04	---	---	---	-04	MS21042 L04
---	---	-448C	---	---	---	---	---	---	---	---	---	---	NONE
-632	-632C	-632C	-632C	-632C	-06	X06W,X06	AX06	---	AX06	---	---	X06	MS21042 -06
---	-640C	-640C	---	---	---	---	---	---	---	---	---	---	NONE
---	---	---	---	---	L06	A06	---	A06	---	A06	---	-06	MS21042 L06
-832C	-832C	-832C	-832C	-832C	-08	X08W,X08	AX08	---	AX08	---	---	X08	MS21042 08
---	---	---	---	---	L08	A08	---	A08	---	A08	---	-08	MS21042 L08
---	-836C	-836C	---	---	---	---	---	---	---	---	---	---	NONE
-1024	---	-1024C	---	---	---	---	---	---	---	---	---	---	NONE
-1032	-1032C	-1032C	-1032C	-1032C	-3	X3W,X3	AX3	---	AX3	---	---	X3	MS21042 -3
-420	---	-420C	---	---	---	---	---	---	---	---	---	---	NONE
---	---	---	---	---	L3	A3	---	A3	---	A3	---	-3	MS21042 L3
-428	-428C	-428C	-428C	-428C	-4	X4W,X4	AX4	---	AX4	---	---	X4	MS21042 -4
---	---	---	---	---	L4	A4	---	A4	---	A4	---	-4	MS21042 L4
-518	---	-518C	---	---	---	---	---	---	---	---	---	---	NONE
-524	-524C	-524C	-524C	-524C	-5	X5	AX5	---	AX5	---	---	X5	MS21042 -5
---	---	---	---	---	L5	A5	---	A5	---	A5	---	-5	MS21042 L5
-616	---	-616C	---	---	---	---	---	---	---	---	---	---	NONE
-624	-624C	-624C	-624C	-624C	-6	X6	AX6	---	AX6	---	---	X6	MS21042 -6
---	---	---	---	---	L6	A6	---	A6	---	A6	---	-6	MS21042 L6
---	---	---	---	---	-7	---	---	---	---	---	---	---	NAS679 X7
---	---	---	---	---	L7	---	---	---	---	---	---	---	NAS679 A7
---	-720C	---	-720C	---	---	---	---	---	AX7	A7	---	---	SEE MS21245
---	-820C	---	-820C	---	---	---	---	---	AX8	A8	---	---	SEE MS21245
---	-918C	---	-918C	---	---	---	---	---	AX9	A9	---	---	SEE MS21245
---	-1018C	---	-1018C	---	---	---	---	---	AX10	A10	---	---	SEE MS21245
---	-1218C	---	-1216C	---	---	---	---	---	AX12	A12	---	---	SEE MS21245
---	-1414C	---	-1414C	---	---	---	---	---	AX14	A14	---	---	SEE MS21245
---	-1614C	---	-1614C	---	---	---	---	---	---	---	---	---	NAS1022 A17
---	-1812C	---	-1812C	---	---	---	---	---	AX18	A18	---	---	SEE MS21245
---	-2012C	---	-2012C	---	---	---	---	---	AX20	A20			SEE MS21245

REQUIREMENTS:

1. MATERIAL: STEEL UNS G10350 (AISI C1035) PER AMS 5080, QQ-S-700
   UNS G10420 (AISI C1042)
   UNS G10500 (AISI 1050) PER AMS 5085
   UNS G40270 (AISI 4027) PER ASTM A322
   UNS G40370 (AISI 4037) PER ASTM A322, A331, A519, A547, AMS 6300
   UNS G86300 (AISI 8630) PER AMS 6280, 6355, 6530, 6550
   UNS G87400 (AISI 8740) PER AMS 6322, 6323, 6325, 6327, 6358
2. FINISH: PLATING, CADMIUM PLATED IN ACCORDANCE WITH QQ-P-416 TYPE II, CLASS 2. DRY FILM LUBRICATED NUTS IN ACCORDANCE WITH QQ-P-416; TYPE AND CLASS ARE OPTIONAL IF THE NUTS WILL MEET THE SALT SPRAY REQUIREMENTS OF QQ-P-416, TYPE II.
3. LUBRICANT: DRY FILM OR NON-DRY FILM IN ACCORDANCE WITH MIL-N-25027. OTHER LUBRICANTS SHALL BE SOLUBLE IN THE CLEANER SPECIFIED IN PROCUREMENT SPECIFICATION.
4. HARDNESS: 49 HRC MAX
5. SURFACE TEXTURE: SURFACE TEXTURE IN ACCORDANCE WITH ANSI/ASME B46.1. UNLESS OTHERWISE SPECIFIED THE SURFACE TEXTURE SHALL NOT EXCEED 125 MICROINCHES.
6. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I. LETTER L BEFORE FIRST DASH NUMBER DESIGNATES DRY FILM LUBRICATED NUTS.

EXAMPLE OF PART NUMBERS MS21042L4=.2500-28 NUT, CADMIUM PLATED, DRY FILM LUBRICATED.
MS21042-4=.2500-28 NUT, CADMIUM PLATED, NOT DRY FILM LUBRICATED.

NOTES:

1. DIMENSIONS IN INCHES.
2. REMOVE ALL SHARP EDGES AND BURRS.
3. THESE NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS33588.
4. MS21042 SUPERSEDES: AN363, AN364, AN365, MS20364, MS20365, MS21040, NAS_679_INPART, NAS_1021_INPART, NAS_1022_INPART, NAS_1291_INPART
5. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
6. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
7. BIDS SHALL BE SOLICITED ONLY FROM THE MANUFACTURERS OR DISTRIBUTORS LISTED ON QPL-25027.

PREPARING ACTIVITY: DLA-IS
CUSTODIANS: ARMY-AV NAVY-AS
AIR FORCE-99 DLA-
REVIEW: AR, AS, MI
USER: ER
PROJECT NUMBER: 5310-1941

MILITARY SPECIFICATION SHEET

TITLE
NUT, SELF-LOCKING, 450°F, REDUCED HEXAGON, REDUCED HEIGHT, RING BASE, NON-CORROSION RESISTANT STEEL.

SPECIFICATION SHEET NUMBER
MS21042 L 15 OCT 93

SUPERSEDING
MS21042 K 30 NOV 88 (SEE NOTE 4.)

AMSC- N/A FSC 5310

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.