

FED. SUP. CLASS.
5305

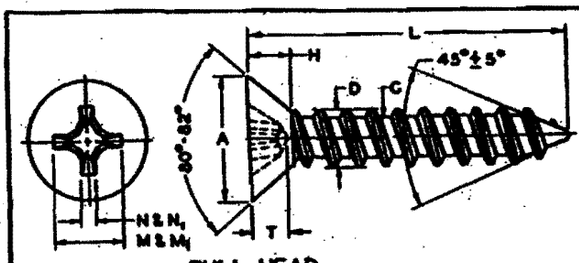

FULL HEAD

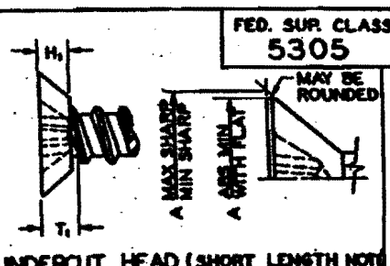

UNDERCUT HEAD (SHORT LENGTH NOT

NOMINAL SIZE			#4(.112)	#6(.138)	#8(.164)	#10(.190)	#12(.216)	#14(.242)
THREADS PER INCH			24	18 / 20*	15 / 18*	12 / 16*	11	10
MAJOR DIAMETER	D	MAX	.114	.141	.168	.194	.221	.254
		MIN	.110	.136	.162	.188	.215	.248
MINOR DIAMETER	C	MAX	.083	.102	.123	.133	.162	.185
		MIN	.078	.096	.116	.126	.155	.178
HEAD DIAMETER	A	MAX SHARP	.225	.279	.332	.385	.438	.491
		MIN SHARP	.207	.257	.308	.359	.410	.461
		ABS MIN	.195	.244	.292	.340	.389	.437
FULL HEAD	HEAD HEIGHT	H	REF .067	.083	.100	.116	.132	.148
	RECESS DIAMETER	M	MAX .128	.174	.189	.204	.268	.283
			MIN .115	.161	.176	.191	.255	.270
	RECESS DEPTH	T	MAX .089	.106	.121	.136	.156	.171
			MIN .073	.089	.098	.113	.133	.148
	RECESS WIDTH	N	MIN .018	.029	.031	.032	.035	.036
UNDERCUT HEAD	HEAD HEIGHT	H1	MAX .047	.059	.070	.081	.092	.104
			MIN .038	.048	.058	.068	.078	.088
	RECESS DIAMETER	N1	MAX .116	.149	.174	.189	.233	.250
			MIN .103	.136	.161	.179	.220	.237
	RECESS DEPTH	T1	MAX .078	.078	.106	.121	.121	.136
			MIN .062	.055	.083	.098	.101	.116
	RECESS WIDTH	N1	MIN .018	.021	.029	.031	.030	.032
DRIVER SIZE			1	2	2	2	3	3

LENGTH L	TOLERANCE	#4(.112) DASH NO.	#4(.112) FIIN	#6(.138) DASH NO.	#6(.138) FIIN	#8(.164) DASH NO.	#8(.164) FIIN	#10(.190) DASH NO.	#10(.190) FIIN	#12(.216) DASH NO.	#12(.216) FIIN	#14(.242) DASH NO.	#14(.242) FIIN
1/4	±1/32	1											
5/16				12									
3/8		3		13		24		35					
1/2		4		14		25		36					
5/8		5		15		26		37					
3/4		6		16		27		38		49		60	
7/8				17		28		39				61	
1				18		29		40		51		62	
1-1/4	±3/64					30		41		52		63	
1-1/2						31		42		53		64	
1-3/4								43				65	
2								44				66	

MATERIAL: STEEL, CASE HARDENED OR HEAT TREATED, TO MEET PERFORMANCE REQUIREMENTS OF PROCUREMENT SPECIFICATION
PROTECTIVE COATING: CADMIUM PLATED, SPECIFICATION QQ-P-416, TYPE II, CLASS 3.

DIMENSIONS: ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS24615-1.
*SHORT LENGTHS: LENGTHS ABOVE DOTTED L. HAVE FINE PITCH THREADS AND UNDERCUT HEADS AS INDICATED.
THREADS: THREAD TYPES TO BE IN ACCORDANCE WITH APPLICABLE REQUIREMENTS OF PROCUREMENT SPECIFICATION.
HOLE SIZES: FOR APPROXIMATE HOLE SIZES SEE MS24631.
NOTES: (1) REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
(2) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL.

CUSTODIANS: A - ORD, N - SHIPS
OTHER INT.: a-CEQS1eMT, a-MCCoRY, AF-
PROCUREMENT SPECIFICATION: FF-S-107
SUPERSEDES:

MILITARY STANDARD

SCREW, TAPPING, THREAD FORMING, TYPE A, FLAT COUNTERSUNK HEAD, CROSS RECESSED, STEEL, CARBON, CADMIUM PLATED

MS24615

SHEET 1 OF 1

DD FORM 1 OCT 61 672-1

AMSC 5053 REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

The screws covered by the following dash numbers listed in MS24635 are cancelled after 25 Feb 1963. Use the dash numbers given in Sheet 1. The cancelled screws cannot always replace the superseding screws and should be used until existing stocks are depleted. Use only the superseding screws for design and engineering. Replacement shall be in accordance with the table below.

CROSS REFERENCE	
CANCELLED	SUPERSEDED BY
MS 24635	MS 24615
DASH NO.	DASH NO.
1	1
2	3
3	4
4	5
5	6
10	13
11	14
12	15
13	16
14	17
15	18
21	24
22	25
23	26
24	27
25	28
26	29
27	30
28	31
32	35
33	36
34	37
35	38
36	39
37	40
38	41
39	42
40	43
41	44
46	49
47	50
48	51
49	52
50	53
57	60
58	61
59	62
60	63
61	64
62	65
63	66

Ⓐ ENTIRE STANDARD REVISED

APPROVED 5 Oct 59 REVISED Ⓐ 25 Feb 1963

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory for all activities. Suggestions for all new engineering and design applications and for revisions once should be made from this document.

P.A. NO(RSDL) Other Cost SHIPS NOA	TITLE: SCREW, TAPPING-THREAD FORMING, TYPE A, FLAT 82° COUNTERSUNK HEAD, CROSS RECESSED, STEEL, CARBON, CADMIUM PLATED	MILITARY STANDARD MS 24615
PROCUREMENT SPECIFICATION FF-S-107	SUPERSEDING MS24635	SHEET 2 OF

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the current version before use.