FED. SUP CLASS
5935

FOR DETAILS OF CONNECTOR FRONT AND REAR END CONFIGURATION, SEE PROCUREMENT SPECIFICATION

CLASS E OR T

TABLE I

Shell size	A ±.016	B ±.010	C +.000 -.016	D ±.005	P (max) panel thickness	T ±.005	H Thread UNEF-2A	S dia. max
8	.812	.594	.563	.516	.147	.120	7/16 - 28	.594
10	.938	.719	.680	.633	.152		9/16 - 24	.719
12	1.031	.812	.859	.802	.152		11/16 - 24	.844
14	1.125	.906	.984	.927	.152		13/16 - 20	.969
16	1.219	.969	1.108	1.052	.152		15/16 - 20	1.078
18	1.312	1.067	1.233	1.177	.152		1-1/16 - 18	1.219
20	1.438	1.156	1.358	1.302	.179		1-3/16 - 18	1.344
22	1.562	1.250	1.483	1.427	.179		1-5/16 - 18	1.469
24	1.688	1.375	1.610	1.552	.169	.147	1-7/16 - 18	1.594

Reviewer activities: Army - MI, MU
Navy - EC, MC, OS
Air Force - 11, 15, 17, 80
DSA - ES

APPROVED 14 Nov 1972 REVISED (B) 13 AUG 74 (C) 2 JAN 1976 (D) 9 MAR 88

Ⓓ CANCELED. FOR PROCUREMENT USE MS27497

INACTIVE FOR DESIGN
USE MS27497

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. AF-85 Other Cust ARMY - EL NAVY - AS	International interest	TITLE CONNECTOR, RECEPTACLE, ELECTRICAL, BACK PANEL WALL MOUNTING, CRIMP TYPE, BAYONET COUPLING, SERIES II.	MILITARY STANDARD MS27664
Procurement Specification MIL-C-38999		SUPERSEDES: MS0027664(USAF)	SHEET 1 OF 2

DD FORM 1 SEP 63 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5935-3657-02

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities: Army - MI, MU
Navy - EC, MC, OS
Air Force - 11, 15, 17, 80
DSA - ES

P.A. AF-85

Other Cust
ARMY-EL
NAVY-AS

International interest:

Procurement Specification
MIL-C-38999

SUPERSEDES:

TITLE CONNECTOR, RECEPTACLE, ELECTRICAL, BACK PANEL WALL MOUNTING, CRIMP TYPE, BAYONET COUPLING, SERIES II.

MILITARY STANDARD

MS27664

SHEET 2 OF 2

DD FORM 1 APR 64 672

EXAMPLE OF PART NUMBER

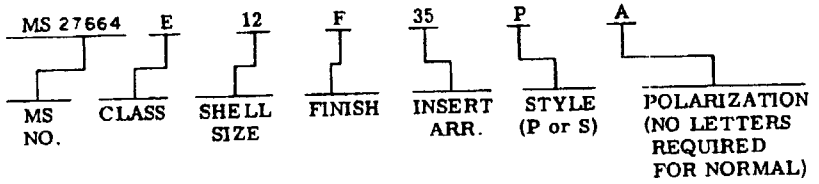


TABLE II

Operating Voltage

Service Rating	Operating Voltage (sea level)	
	AC(rms)	DC
M	400	550
I	600	850
II	900	1250

INCHES	MM
.005	.13
.006	.15
.010	.25
.120	3.05
.147	3.73
.152	3.86
.169	4.29
.179	4.55
.219	5.56
.238	6.05
.438	11.13
.447	11.35
.506	12.85
.516	13.11
.547	13.89
.563	14.30
.594	15.09
.633	16.08
.680	17.27
.719	18.26
.802	20.37
.812	20.62
.844	21.44
.859	21.82
.906	23.01
.927	23.55
.938	23.83
.969	24.61
.984	24.99
1.031	26.19
1.052	26.72
1.062	26.97
1.078	27.38
1.108	28.14
1.219	30.96
1.125	28.58
1.156	29.36
1.177	29.90
1.219	30.96
1.233	31.32
1.250	31.75
1.302	33.07
1.312	33.32
1.344	34.14
1.358	34.49
1.375	34.93
1.427	36.25
1.438	36.53
1.469	37.31
1.483	37.67
1.552	39.42
1.562	39.67
1.594	40.49
1.610	40.89
1.688	42.88

NOTES:
1. Dimensions are in inches.
2. In addition to the requirements of MIL-C-38999, the connector shall meet the operating voltage requirements as specified in table II.
3. This standard takes precedence over procurement documents referenced herein.
4. Referenced documents shall be of the issue in effect on date of invitation for bids.
5. Thread relief undercut permissible in manufacturer of .219 minimum full thread.
6. The gage feature for GG shall be .010 (.25 mm) smaller than the MMC size at basic location.
7. For main keyway and keyway positions, see MIL-C-38999.

FED. SUP CLASS 5935

APPROVED 14 NOV 72 REVISED (D) FOR CHANGES SEE SHEET 1

5935-365-7-02

Check for updates
Source: https://assist.dla.mil -- Downloaded: 2026-10-23 16:47Z
Verify that this is the current version before use.