


FED. SUP CLASS
2320

USER ACTIVITIES:

REVIEWER ACTIVITIES:

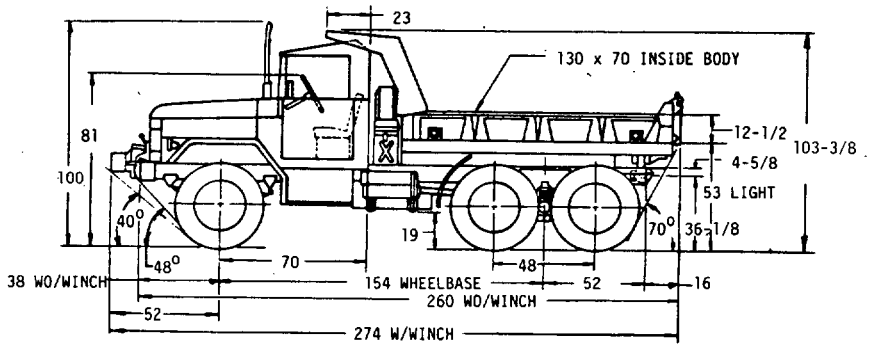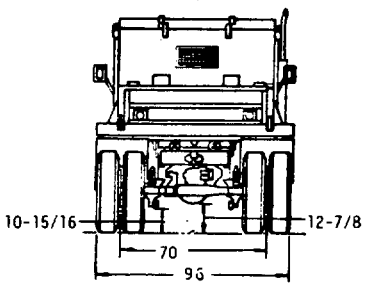


| MS PART NO. | ENGINEERING DRAWING NO. | DESCRIPTION |
|---|---|---|
| MS500053-1 | 8736589 | WITH WINCH |
| MS500053-2 | 8736598 | LESS WINCH |

APPROVED 9 JUNE 1966 REVISED © 6 MAY 85

© ENTIRE STANDARD REVISED

| P. A. ARMY-AT Other Cust | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|
| | | TRUCK, DUMP, MULTIFUEL ENGINE, 2-1/2 TON, 6X6, 154 INCH WHEELBASE, MILITARY DESIGN, M342A2 | MS500053(AT) |
| PROCUREMENT SPECIFICATION MIL-T-46780 | SUPERSEDES: | | SHEET 1 OF 2 |

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.

## VEHICLE CHARACTERISTICS

CHASSIS: M45A2G WO/W 8736602 W/W 8736604

CURB WEIGHT: FULLY EQUIPPED LESS PAY- AND CREW.

| | WO/W | W/W |
|---|---|---|
| FRONT AXLE | 6255 | 6910 |
| REAR AXLE | 9000 | 8865 |
| TOTAL | 15255 | 15775 |

PAYLOAD: LOADED WO/W 5000 W/W 5000

GROSS VEHICLE WEIGHT: FULLY EQUIPPED HIGHWAY, PLUS PAYLOAD AND CREW (400 LBS.)

| | WO/W | W/W |
|---|---|---|
| FRONT AXLE | 6320 | 6975 |
| REAR BOGIE | 13935 | 13800 |
| TOTAL | 20255 | 20775 |

TOWED LOAD MAXIMUM: LOADED 6000 LBS.

(REFERENCED WEIGHTS ARE FOR INFORMATION ONLY.)

FORDING DEPTH: W/KIT 72 IN. WO/KIT 30 IN.

ENGINE: COMPLETE 11642105
MODEL: LD 465-1, MULTIFUEL
NO. OF CYLINDERS: SIX IN LINE

FAN: ENGINE COOLING 11641747

FUEL SYSTEM: INST'N 10897080

EXHAUST SYSTEM: INST'N 11677097

CLUTCH: INST'N 8757745

TRANSMISSION ASSY.: 10896440
TYPE: SYNCHROMESH
FORWARD SPEEDS: 5; REVERSE: 1

TRANSFER TRANSMISSION ASSY INST'N 10937636-1 11609224
GEAR RATIO: HIGH 1:1 LOW 1.98:1

FRAME ASSY. CHASSIS: 11609275

HOIST AND SUBFRAME ASSY.: DUMP BODY INST'N 10871712-1

ELECTRICAL SYSTEM: INST'N 10897073
POTENTIAL: 24 VOLTS
BATTERIES: 2, 12 VOLT, 6TN MS35000-4

REFLECTORS: 4, RED MS35387-1; 4, AMBER MS35387-2

BRAKE: SERVICE
ACTUATION: AIR/HYDRAULIC

PARKING BRAKE CONTROL: INST'N 11609817

FRONT SUSPENSION: INST'N 10872040
FRONT AXLE 7521734-1
FRONT SPRINGS, 2 11601335
SHOCK ABSORBERS, 2 7539007

REAR SUSPENSION: INST'N 8757834
REAR AXLE, 2 7368511
REAR SPRINGS, 2 7368629
TORQUE ROD ASSY., 6 8757685

TIE DOWNS: W/WINCH 16 12 ,U-BOLTS 11647735
LOCATION: 6, EACH SIDE
2, FRONT SHACKLES 12301040
2, REAR SHACKLES 7539662

MIRROR ASSY.: INST'N 10937793

WHEELS: TEN, PLUS ONE SPARE MS53044-5
SIZE: 7-1/2 X 20, OFFSET 6-3/16

TIRES: TEN PLUS ONE SPARE MIL-T-12459
SIZE: 9.00 X 20, 8 PLY, NDCC

TUBES: GRP 2 9.00 X 20 ZZ-I-550

CARRIER, SPARE TIRE: INST'N 8345256

CAB ASSEMBLY: SOFT TOP INST'N 10896757

DUMP BODY: INST'N 10871051-1

PUMP DRIVE AND CAB CONTROLS:
DUMP BODY INST'N 10871713

BODY ASSEMBLY: INST'N 10871710
COMPL. DUMP, 2-1/2 CUBIC YD. CAPACITY

PROTECTOR ASSEMBLY:
DUMP BODY CAB INST'N 10871711

GENERAL:
HOOD & FENDER INST'N 11609237-2
STEERING: INST'N 10897162
RUNNING BOARD AND BATTERY BOX: INST'N 10871540
RUNNING BOARD AND TOOL BOX: INST'N 10871541
INSTRUMENT PANEL: INST'N 10937458
TACHOMETER: INST'N 10896303
SPEEDOMETER: INST'N 10937442
THROTTLE LINKAGE: INST'N 10896671-1
AIR CLEANER: INST'N 10896886-1
PROPELLER SHAFT: INST'N 10871516

WINCH: INST'N 10872197
WINCH: 7538687

PINTLE: ASSY. 11609483

PERFORMANCE: LOADED
CRUISING RANGE: HIGHWAY 275 MILES
MAXIMUM SPEED: HIGHWAY 56 MPH

MISCELLANEOUS EQUIPMENT:
TROOP SEAT AND COVER KIT 5703488
FORDING KIT 10937874-3
CLOSURE, HARDTOP 7085350

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

| MS PART NO. | ENGINEERING DRAWING NO. | DESCRIPTION |
|---|---|---|
| MS500053-1 | 8736589 | WITH WINCH |
| MS500053-2 | 8736598 | LESS WINCH |

© ENTIRE STANDARD REVISED

APPROVED 9 JUNE 1966 REVISED © 6 MAY 85

P. A. ARMY-AT
Other Cust

INTERNATIONAL INTEREST

TITLE
TRUCK, DUMP, MULTIFUEL ENGINE, 2-1/2 TON, 6X6, 154 INCH WHEELBASE, MILITARY DESIGN, M342A2

MILITARY STANDARD
MS500053(AT)

PROCUREMENT SPECIFICATION
MIL-T-46780

SUPERSEDES:

SHEET 2 OF 2

DD FORM MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USER ACTIVITIES

REVIEWER ACTIVITIES

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.